



Power Management Module for *ISDN NT1*


SPECIFICATION Rev. 02

Type	Vi	Vo	Io
COMBI/E1-I	195 to 253 Vac and 28 to 115 Vdc	out1: 5 V	80 mA
		out 2: 40V	120 mA

FEATURES

- Uko INTERFACE (DC) and MAINS (AC) inputs to enable NPM (Normal Power Mode) and RPM (Restricted Power Mode) CONDITIONS
- INPUT FILTER TO MEET EMI requirements
- PEAK INPUT OVERVOLTAGE WITHSTANDING
- AC INPUT PROTECTION FUSE
- INPUTS TO OUTPUTS INSULATION
- 2 INSULATED OUTPUTS:
Vo1=5 V for NT1 logics
Vo2=40 V for "S" interface
- AUXILIARY LOGIC OUTPUT TTL-COMPATIBLE for LED & NPM/RPM MODE indication.
- PS1 and PS2 output TTL-compatible
- INTERNAL RELAY FUNCTION FOR Vo2 POLARITY REVERSE
- U-INTERFACE ACCORDING TO ETR080

PRODUCT VIEW

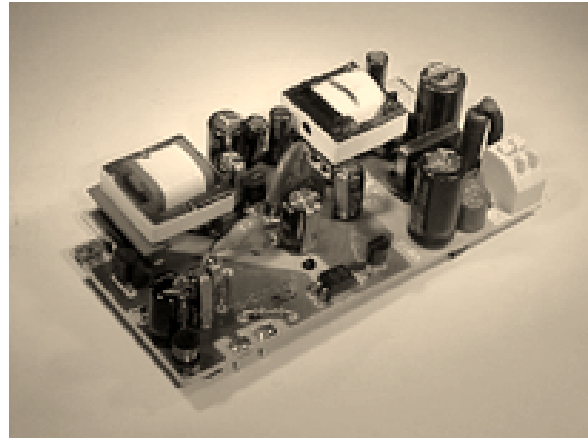

ORDERING NUMBER: GS-COMBI/E1-I

- "S" INTERFACE OUTPUT CHARACTERISTICS:
 - Peak output of 220 mA for 150 ms
 - Typical output power 4,5 W
 - Output filtering to meet ETSI requirements
 - Hold up time: 20 ms with 4,5 W output power
 - Continuous short circuit protection
 - Peak overvoltage withstand: 1KV for 10/700 us transversal
- S-INTERFACE ACCORDING TO ETS 300 012
- MTBF: 300 Kh, according to MIL HDBK 217-F
- Operating Temperature: -10 to +70°C

DESCRIPTION

The NT1 Power Management Module COMBI/E1-I is a comprehensive solution for ISDN-NT1 (Network Termination Basic Access NTBA) equipment, combining both AC-DC and DC-DC functions.

The GS-COMBI/E1-I provide the NTBA with all necessary supply voltages as well as control signals to operate in the different operating modes, typically the Normal Power Mode (NPM) and Restricted Power Mode (RPM).

Connected to the main, Input 1 (2 poles AC connector) is the AC input power to the COMBI/E1-I, source of the whole necessary power in normal operating mode, namely in NPM. Input 2 is the DC power source when in RPM, therefore to connect to the U-INTERFACE.

The device supply 5V (out 1) for logics and 40 V (out 2) for the S interface both in Normal Power Mode (NPM) and in Restricted Power Mode (RPM).

RPM mode is the emergency condition that occurs if the mains (AC) input is not available. An internal "relay function" is available to reverse the 40 V output polarity. A third auxiliary output can be used for LEDs driving and RPM/NPM mode acknowledge (Logic output).

The Logic output becomes high (+5V) when in NPM condition.

PS1 and PS2 signal overload at the S-interface (PS1 in NPM and PS2 in RPM)

The converter offers short-circuit protection on both outputs: particularly, short-circuit on 40V output doesn't affect the +5V output.

Out 1, out 2... out 5 share the same common return.

3000 VRMS insulation voltage for 60 seconds (reinforced insulation) is provided among input 1 and all outputs. Same reinforced insulation is also provided between Input 1 and Input 2.

2000 VRMS / 1 min. reinforced insulation is provided between input 2 and all outputs.

When in NPM mode (AC main supply), the module max. power consumption is <15 VA (apparent power).

Input 2 undervoltage lockout offers high impedance in order to have 10 uA max input current when V_{i2} is <18 Volts.

The design of the module has been conducted using the following reference standards:

EN 60950, VDE0878 part 1 class B (EMC), EN55022 class B (emission), EN50 082-1 (immunity) ITU-T I.430, ETS 300 012 and ETR 080 and ETS300 047 (ISDN BASIC ACCESS, Safety and Protection); anyway, please note that no certification processes have been carried out on the module itself.


ELECTRICAL CHARACTERISTICS when in **NPM** (Tamb=25°C, unless otherwise specified.)**NPM Standard Condition: Vin1 = 195 to 253 Vrms Vin2 = 28 to 115 Vdc**

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Vi1	Input Voltage 1		195		253	VRMS
Vi2	Input Voltage 2	any polarity	28		115	Vdc
fi	Vi1 Input Frequency	Vi1 = 230 VRMS	43		56	Hz
Vi1st	Start up Input 1 voltage	Output parameters as per NPM Standard Conditions			185	VRMS
Vi2st	Start up Input 2 voltage	Output parameters as per Standards Conditions			44	Vdc
Vo1	Output Voltage 1	Standard conditions	4.75	5	5.25	V
Vo2	Output Voltage 2	Standard conditions	36	40	42	V
Vo3	Output Voltage 3	Standard conditions, Io3=0.9 to 3mA	4.5	5	5.25	V
Vo4	Output Voltage 4 (PS 2)	Vo2 > 34 v (normal load)	4.75	5	5.25	V
		Vo2 < 24v (overload)	4.75	5	5.25	V
Vo5	Output Voltage 5 (PS 1)	Vo2 > 34v (normal load)	4.75	5	5.25	V
		Vo2 < 24v (overload)			0.8	V
Vor1	Output Ripple voltage 1	Standard conditions BW: 0-20 MHz			20	mVrms
Vor2	Output Ripple voltage 2	Standard conditions BW: 0-20 MHz			100	mVrms
Io1	Output Current 1	Standard conditions	3		80	mA
Io2	Output Current 2	Standard conditions	0		120	mA
Ioc2	Output Overcurrent 2	t=150ms, Vo1=34 to 42 V	220	240	260	mA
Io2sc	Output 2 short circuit current	Continuous short circuit	20	40	60	mA
Vi1th	NPM => RPM mode Vi1 threshold	Output parameters as per Standard Conditions			160	Vrms
Ttr	Transition time	transition NPM => RPM and vice versa			5	ms
Vi1pk	Input 1 Transient overvoltage	t = 8/20 us transversal	2			kV
Vi2pk	Input 2 Transient overvoltage	t= 10/700 us transversal	500			V
Vo2pk	Output 1 Transient overvoltage	t = 10/700 us transversal	1000			V
Pi1r	Input 1 Real Power	NPM standard conditions			9	W
Pi1	Input 1 Apparent Power	NPM standard conditions			15	VA
Vist	Insulation Voltage, pulse	INputs to outputs t=10/700 us (pulse)	4			kV
th	Hold-up time	Vin=195 VRMS Pout 1:0 to 340 mW Pout 2: 4.5 W	20			ms

ELECTRICAL CHARACTERISTICS when in **RPM** ($T_{amb}=25^{\circ}\text{C}$, unless otherwise specified.)**RPM Standard Condition:** $V_{in1} < 100 \text{ Vrms}$ $V_{in2} = 28 \text{ to } 115 \text{ Vdc}$

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Vi1	Input Voltage 1		0		100	Vrms
Vi2	Input Voltage 2	any polarity	28		115	Vdc
Vi2st	Start Up Input 2 Voltage				44	Vdc
Vo1	Output Voltage 1	RPM Standard Conditions	4.75	5	5.25	V
Vo2	Output Voltage 2	RPM Standard Conditions	34	40	42	V
Vo3	Output Voltage 3	RPM Standard conditions, out 3 load=50 kOhm			0.8	V
Vo4	Output Voltage 4 (PS 2)	Vo2 > 34v (normal load)	4.75	5	5.25	V
		Vo2 < 24v (overload)			0.8	V
Vo5	Output Voltage 5 (PS 1)	Vo2 > 34v (normal load)			0.8	V
		Vo2 < 24v (overload)			0.8	V
Vor1	Output Ripple Voltage 1	RPM Standard Conditions BW:0-20 Mhz			20	mVrms
Vor2	Output Ripple Voltage 2	RPM Standard Conditions BW:0-20 Mhz			100	mVrms
Io1	Output Current 1	RPM Standard Conditions	3		80	mA
Io2	Output Current 2	RPM Standard Conditions	0		12.5	mA
Io2sc	Output 2 short circuit current	Continuous short circuit	9		13.5	mA
Vi1th	RPM=>NPM mode Vi1 threshold				185	VRMS
Ttr	Transition time	transition NPM => RPM and vice versa			5	ms
Vi1pk	Input 1 Transient overvoltage	t = 8/20 us transversal	2.0			Kv


COMBI/E1-I Power Management Module TOP VIEW (dimensions in mm)

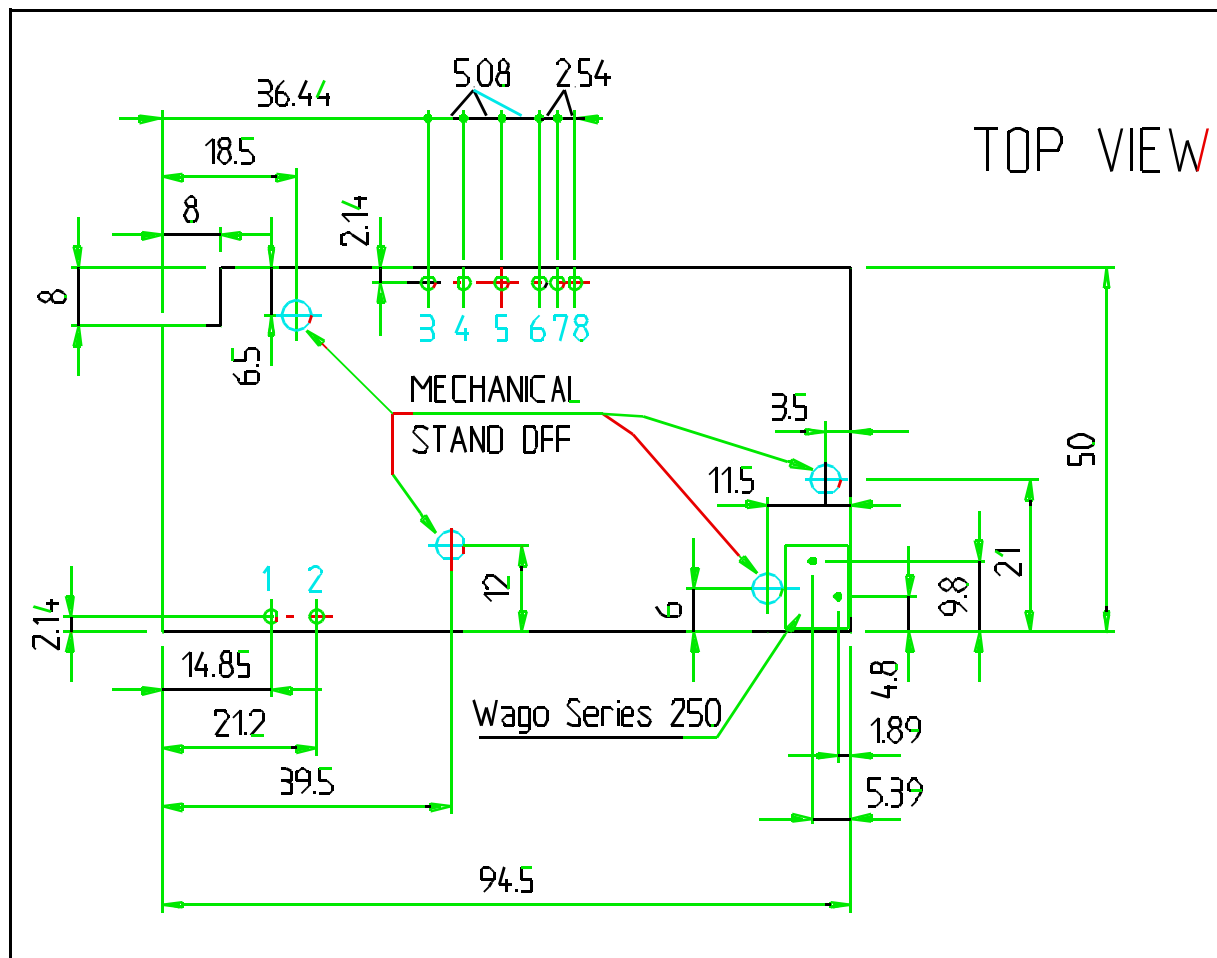**PIN CONFIGURATION**

Input 1 (Vin 1: 230Vac) apply to the WAGO Series connector bottom right in the TOP VIEW

Pin No	Function	Pin No	Function
1	DC "U inteface" input (in 2)	5	Out 2: +/-40 V output
2	DC"U inteface" input (in 2)	6	Out 3: Logic output (NPM)
3	Out 1: +5V output	7	Out 4: PS 2
4	Out common ground GND	8	Out 5: PS 1

COMBI/E1-I Power Management Module SIDE VIEW (dimensions in mm)

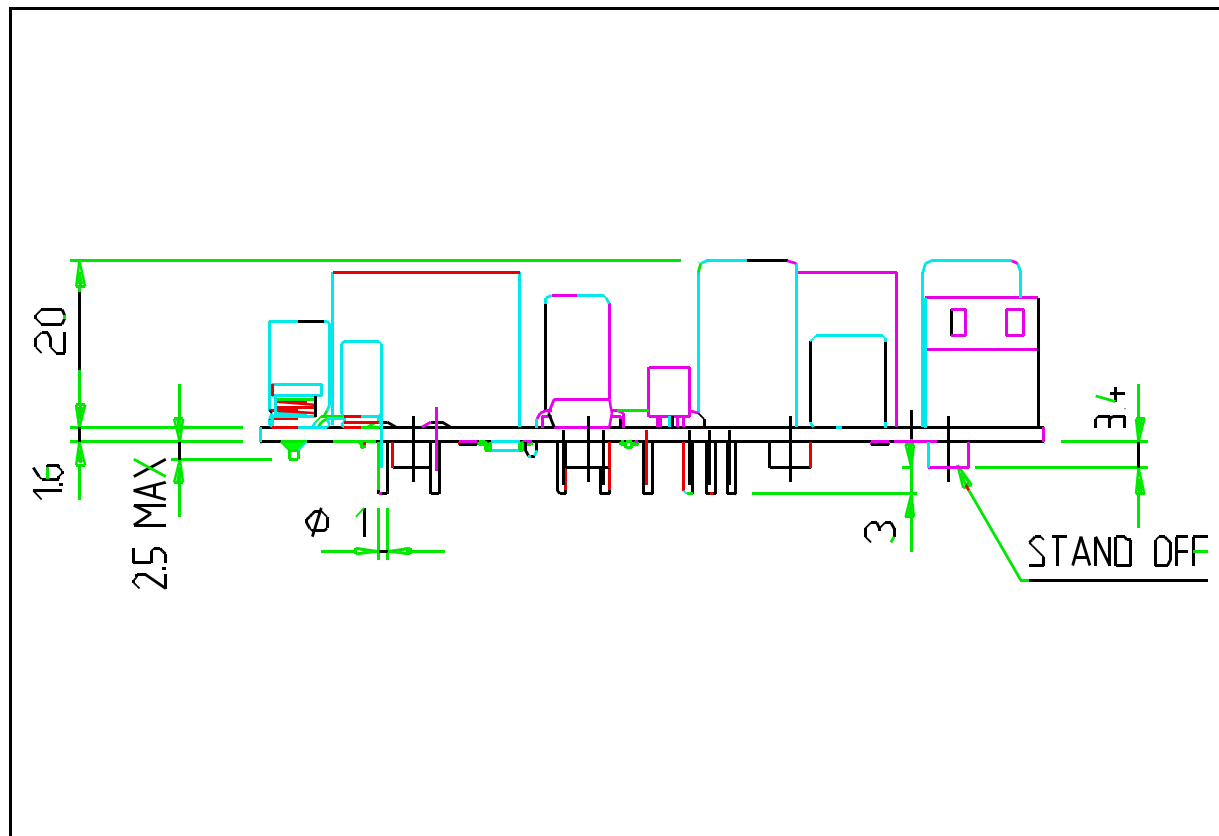

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>