


# TL52055

## WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT 3-CIRCUIT VIDEO SWITCH

SCDS169 – MAY 2004

- Functionally Similar to M52055, NJM2283, MM1231, and BA7602
- $V_{CC}$  Operating Range From 4.5 V to 9 V
- Wide Frequency Range (0 dB at 40 MHz,  $V_{CC} = 5$  V)
- Crosstalk (–75 dB at 4.43 MHz)
- BiCMOS Technology
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- ESD Performance Tested Per JESD 22
  - 2000-V Human-Body Model (A114-B, Class II)
  - 1000-V Charged-Device Model (C101)
- Applications
  - Digital TV, LCD TV, PDP TV, and CRT TV
  - VCR, Projector, and DVD Player

D OR PW PACKAGE  
(TOP VIEW)

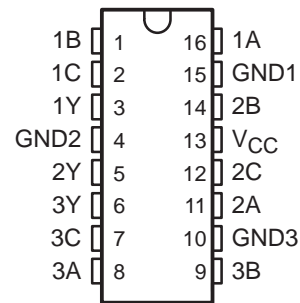

### description/ordering information

The TL52055 is a wide-bandwidth, 2-input, 1-output, 3-circuit video switch. All inputs are bias types. The select (1C, 2C, 3C) inputs control the signal path of A port and B port. The device can be used for switching separate video signals and component-video signals and is suitable for DTV, LCD, PDP, and other high-quality AV systems. The device provides no loss (0 dB) up to 40 MHz and has a very low crosstalk.

### ORDERING INFORMATION

$T_A$	PACKAGE†		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	SOIC – D	Tube	TL52055D	TL52055
		Tape and reel	TL52055DR	
	TSSOP – PW	Tape and reel	TL52055PWR	ZA055

† Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at [www.ti.com/sc/package](http://www.ti.com/sc/package).

### FUNCTION TABLE

INPUT C	ON CHANNEL
L	A port to Y port
H	B port to Y port
OPEN	A port to Y port



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2004, Texas Instruments Incorporated

## SCDS169 – MAY 2004

Supply voltage range, $V_{CC}$	–0.3 V to 12 V
Package thermal impedance, $\theta_{JA}$ (see Note 1): D package	73°C/W
PW package	108°C/W
Storage temperature range, $T_{stg}$	–65°C to 150°C

NOTE 1: The package thermal impedance is calculated in accordance with JEDEC 51-7.

		MIN	MAX	UNIT
V <sub>CC</sub>	Supply voltage	4.5	9	V
T <sub>A</sub>	Operating free-air temperature	−40	85	°C

**TL52055**  
**WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT**  
**3-CIRCUIT VIDEO SWITCH**

SCDS169 – MAY 2004

**electrical characteristics  $V_{CC} = 5\text{ V}/9\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (see Note 2)**

PARAMETER	TEST CONDITION	MIN	TYP	MAX	UNIT
$I_{CC1}$ Operating current 1	$V_{CC} = 9\text{ V}$ , No signal		10.3	14	mA
$I_{CC2}$ Operating current 2	$V_{CC} = 5\text{ V}$ , No signal		9.4	12	mA
$f_t$ Frequency bandwidth	$V_{CC} = 5\text{ V}$ , $V_{IN} = 1\text{ V}_{P-P}$		40		MHz
$G_V$ Voltage gain	$F_{IN} = 1, 10\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$	-0.6	-0.1	0.4	dB
$G_F^\ddagger$ Flatness of voltage gain	$F_{IN} = 30\text{ MHz}/1\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$		0		dB
$CT_{SW}^\S$ Switch crosstalk	$F_{IN} = 4.43\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$	-75		-60	dB
$CT_{CH}^\P$ Channel crosstalk	$F_{IN} = 4.43\text{ MHz}$ , $V_{IN} = 1\text{ V}_{P-P}$	-75		-60	dB
$D_G$ Differential gain	$V_{IN} = 1\text{ V}_{P-P}$ , 10-step video signal		0.3		%
$D_P$ Differential phase	$V_{IN} = 1\text{ V}_{P-P}$ , 10-step video signal		0.3		deg
$V_{OS}$ Output offset voltage		-10	0	10	mV
$Z_I$ Input impedance			20		k $\Omega$
$V_{IH}$ High-level control input voltage (C inputs)	$V_{CC} = 5\text{ V}$ and $9\text{ V}$	2		$V_{CC}$	V
$V_{IL}$ Low-level control input voltage (C inputs)	$V_{CC} = 5\text{ V}$ and $9\text{ V}$	0		0.8	V

<sup>†</sup> Frequency bandwidth is defined as the maximum frequency, with 0-dB gain.

<sup>‡</sup>  $G_F$  is the difference of  $G_V$  at 30 MHz and at 1 MHz.

<sup>§</sup> Switch crosstalk is defined as the crosstalk from an ON-channel to an OFF-channel (xA to xB).

<sup>¶</sup> Channel crosstalk is defined as the crosstalk between two ON-channels (1Y to 2Y, 2Y to 3Y).

NOTE 2: All unused inputs of the device must be open or connected to GND through a capacitor to ensure proper device operation.

**TL52055**  
**WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT**  
**3-CIRCUIT VIDEO SWITCH**

SCDS169 – MAY 2004


equivalent circuit,  $V_{CC} = 5\text{ V}$  (9 V)<sup>†</sup>

PIN NO.	PIN NAME	INSIDE EQUIVALENT CIRCUIT	VOLTAGE	NOTE
16 1 11 14 8 9	1A 1B 2A 2B 3A 3B		2.9 V (5.2 V) <sup>†</sup>	Input
3 5 6	1Y 2Y 3Y		2.1 (4.4) <sup>†</sup>	Output
2 12 7	1C 2C 3C			Control
13	$V_{CC}$			
15 4 10	GND1 GND2 GND3			

<sup>†</sup> Voltages in parentheses are associated with  $V_{CC} = 9\text{ V}$ .

<sup>‡</sup>  $V_{BIAS}$  is an internal voltage source.

### PARAMETER MEASUREMENT INFORMATION

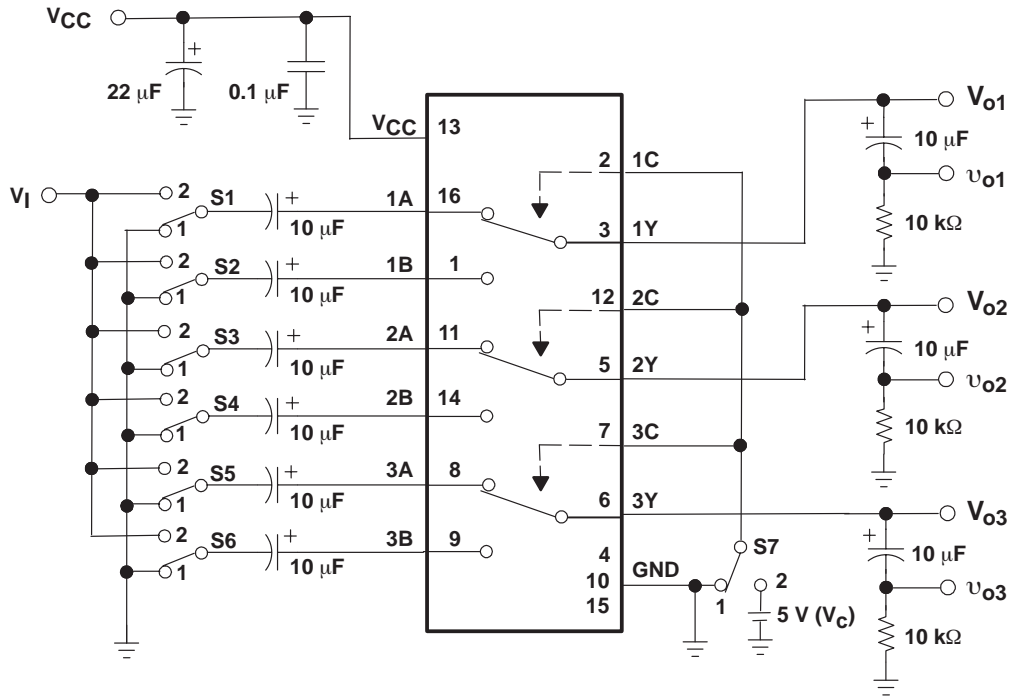


SYMBOL	S1	S2	S3	S4	S5	S6	S7	MEASUREMENT POINT
I <sub>CC1</sub>	1	1	1	1	1	1	1	V <sub>CC</sub>
I <sub>CC2</sub>	1	1	1	1	1	1	1	
G <sub>F</sub>	2	1	1	1	1	1	1	
G <sub>V</sub>	2	1	1	1	1	1	1	v <sub>o1</sub> , v <sub>o2</sub> , v <sub>o3</sub>
D <sub>G</sub> /D <sub>P</sub>	2	1	1	1	1	1	1	
CT <sub>SW1</sub>	2	1	1	1	1	1	2	
CT <sub>SW2</sub>	1	2	1	1	1	1	1	v <sub>o1</sub>
CT <sub>SW3</sub>	1	1	2	1	1	1	2	v <sub>o2</sub>
CT <sub>SW4</sub>	1	1	1	2	1	1	1	
CT <sub>SW5</sub>	1	1	1	1	2	1	2	v <sub>o3</sub>
CT <sub>SW6</sub>	1	1	1	1	1	2	1	
CT <sub>CH1</sub>	2	1	1	1	1	1	1	v <sub>o2</sub> , v <sub>o3</sub>
	1	2	1	1	1	1	2	
CT <sub>CH2</sub>	1	1	2	1	1	1	1	v <sub>o1</sub> , v <sub>o3</sub>
	1	1	1	2	1	1	2	
CT <sub>CH3</sub>	1	1	1	1	2	1	1	v <sub>o1</sub> , v <sub>o2</sub>
	1	1	1	1	1	2	2	
V <sub>OS</sub>	1	1	1	1	1	1	1/2	V <sub>o1</sub> , V <sub>o2</sub> , V <sub>o3</sub>
V <sub>IH</sub> /V <sub>IL</sub>	1/2	1/2	1	1	1	1	V <sub>C</sub>	V <sub>C</sub>

Figure 1. Load Circuit and Test Conditions


**TL52055**  
**WIDE-BANDWIDTH, 2-INPUT, 1-OUTPUT**  
**3-CIRCUIT VIDEO SWITCH**

SCDS169 – MAY 2004


**TYPICAL CHARACTERISTICS**

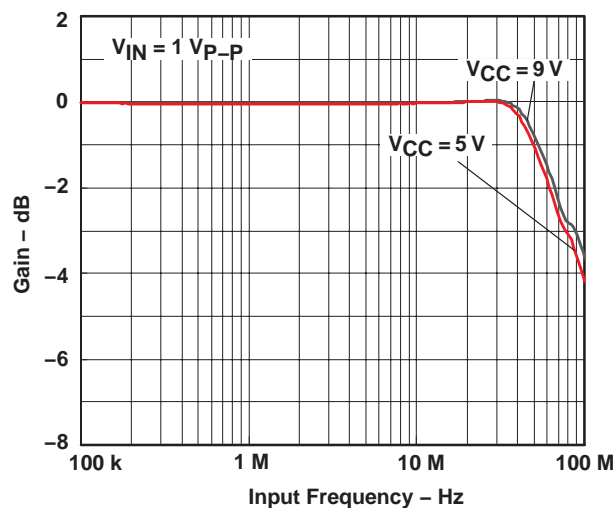

**Figure 2. Gain vs Frequency**

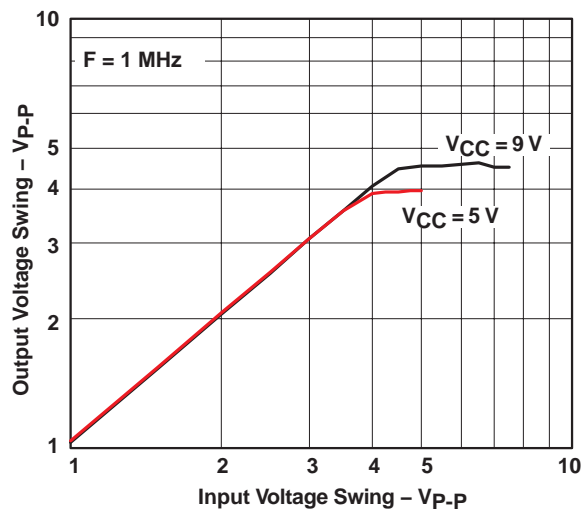


**Figure 3. Output Voltage Swing vs Input Voltage Swing**

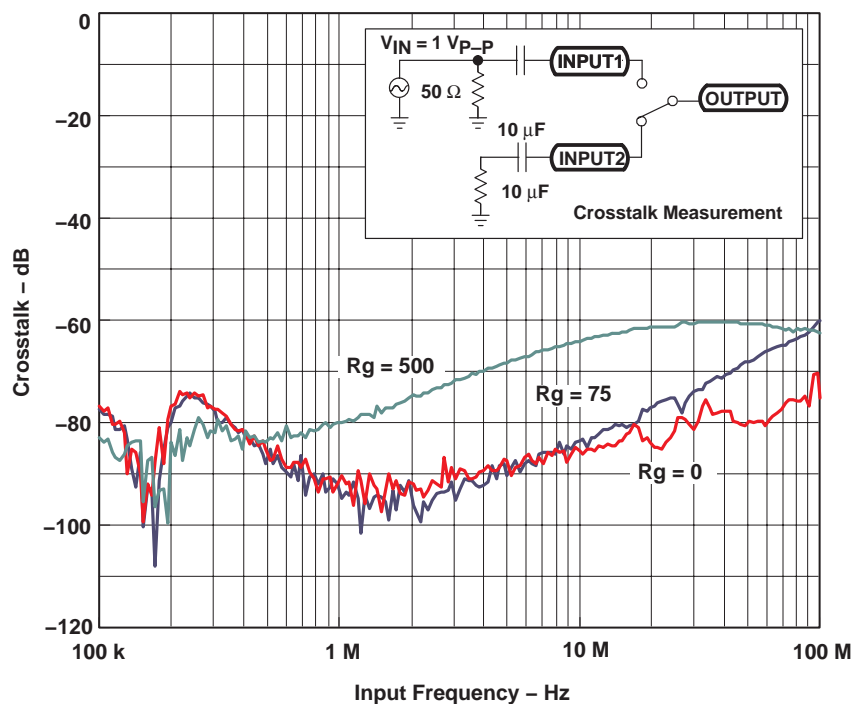

**Figure 4. Crosstalk vs Frequency**

### APPLICATION INFORMATION

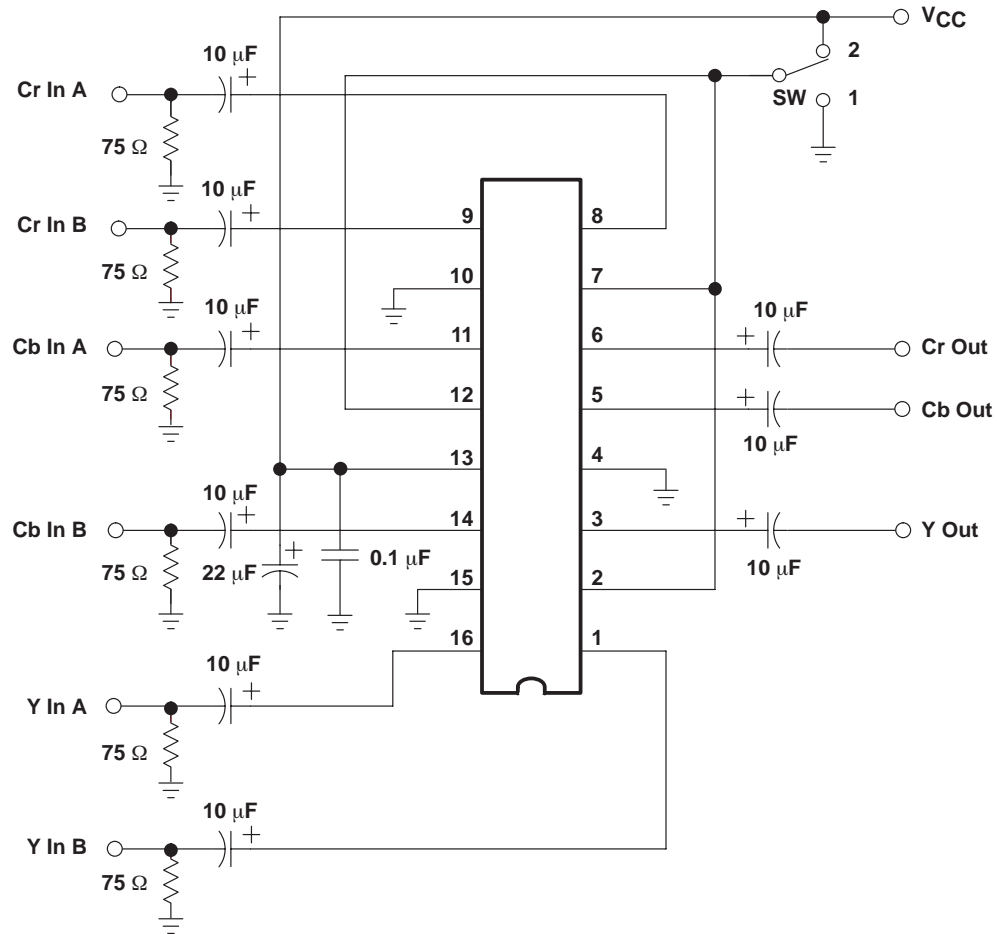


**Figure 5. Application of TL52055**

Figure 5 shows a typical application of the TL52055 in component-video signaling. Typically, the peak-to-peak amplitude of a component-video signal is less than 1 V. If the frequency of operation is less than 40 MHz, the switch does not cause any loss of signal. Also, due to low crosstalk, there is no degradation of the video switch.

## D (R-PDSO-G16)

## PLASTIC SMALL-OUTLINE PACKAGE

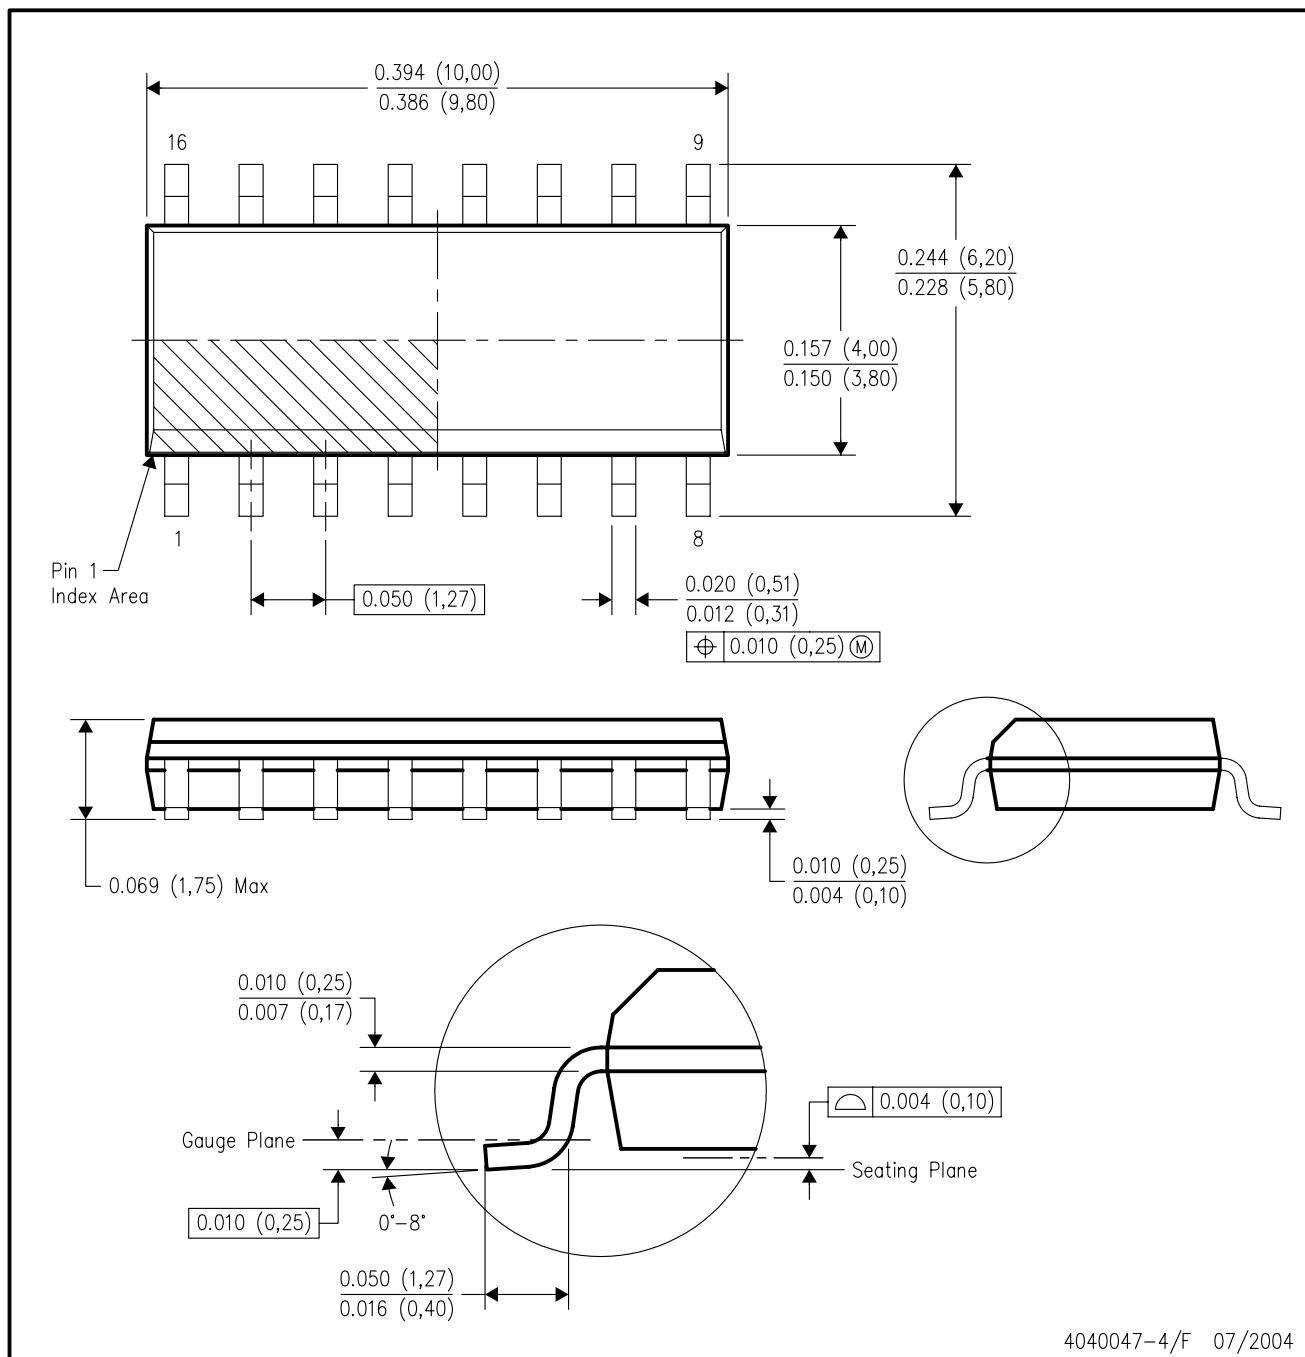


4040047-4/F 07/2004

## PW (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

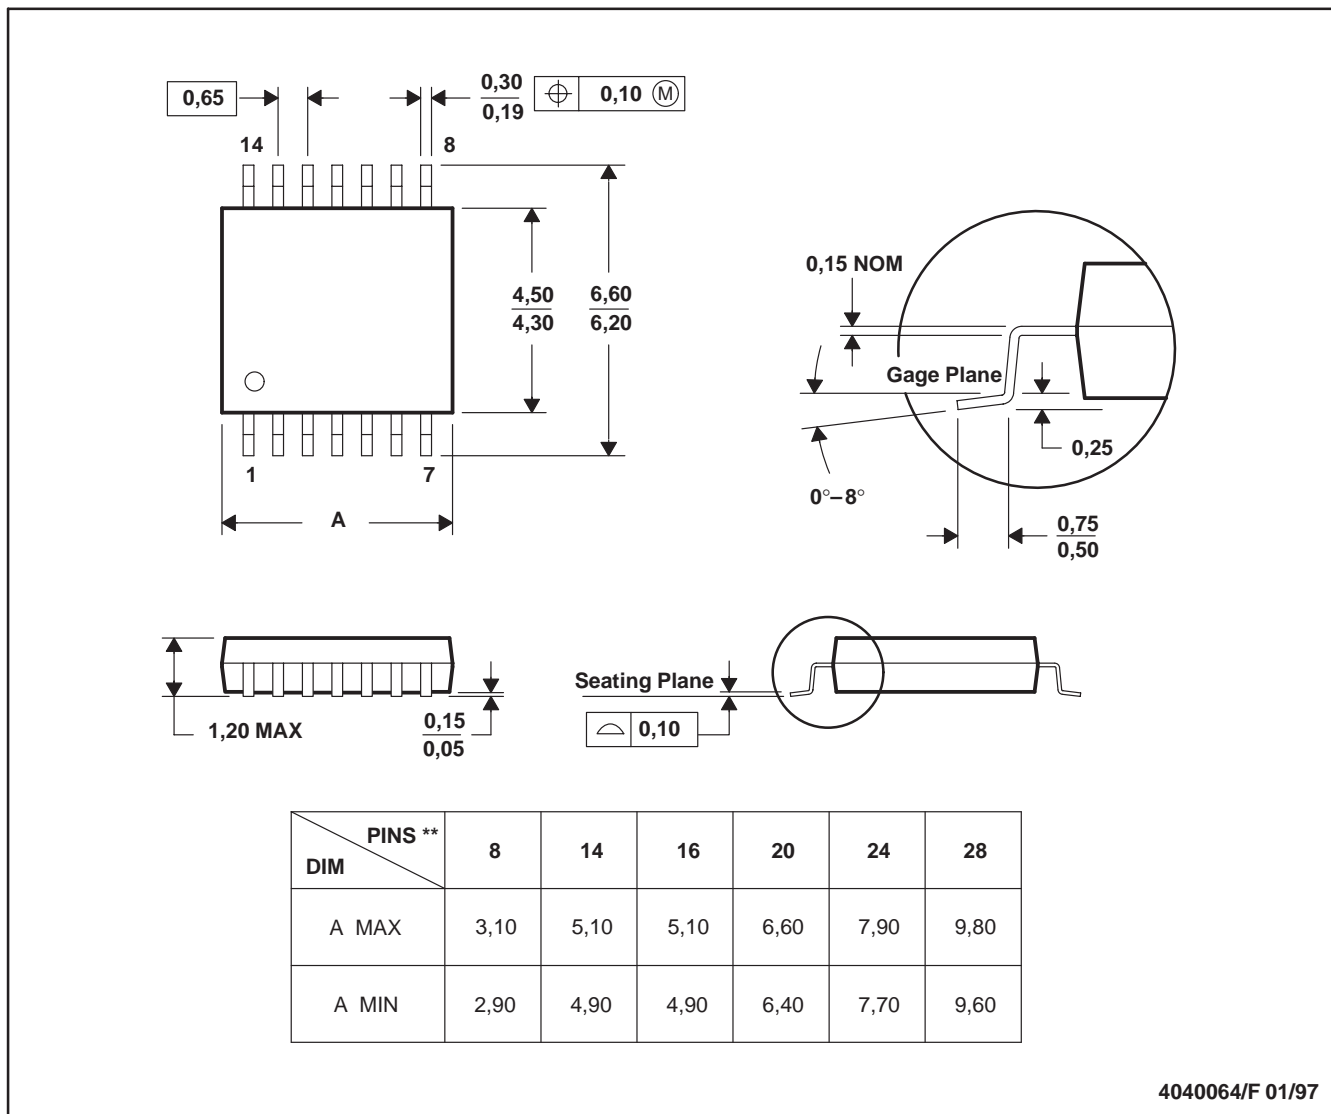

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion not to exceed 0,15.
  - Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

<b>Products</b>		<b>Applications</b>	
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>	Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>	Automotive	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>	Broadband	<a href="http://www.ti.com/broadband">www.ti.com/broadband</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>	Digital Control	<a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>	Military	<a href="http://www.ti.com/military">www.ti.com/military</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>	Optical Networking	<a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>	Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
		Telephony	<a href="http://www.ti.com/telephony">www.ti.com/telephony</a>
		Video & Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>
		Wireless	<a href="http://www.ti.com/wireless">www.ti.com/wireless</a>

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2004, Texas Instruments Incorporated