

VGA resolution USB2.0 web camera module


Preliminary Data

Features

- 640 x 480 (VGA) USB2.0 webcam
- RGB Bayer color filter array
- 3.6 μm pixel size
- Tiny form factor: 32 mm x 7.5 mm x 3.8 mm complete module dimensions
- Integrated 10-bit video ADC and processing
- USB2.0 high speed interface for data transfer and control
- I²C master capability
- USB video YUV2 compliance
- On-chip 3.3 V and 1.8 V regulators
- Requires single 5 V supply
- Minimum required PCB support components
- Video format: 640 x 480 YUV2 up to 30 fps
- Integrated image processing functions:
 - Automatic exposure
 - Automatic white balance
 - Dark level compensation
 - Lens shading correction
 - Image sub-sampling
 - Flicker cancellation
 - Sharpening
 - Gamma correction
 - RGB to YUV 422

Applications

This module's tiny physical size, allied to the fact that it requires no external components, makes it ideal for embedded applications such as laptops and small form factor web cameras.

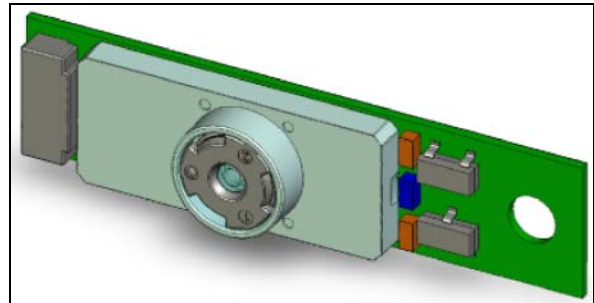


Description

The VS6522 is a VGA imager on chip (IOC), fabricated in a high performance 0.18 μm CMOS imaging process, with a wide field of view lens (59° typical diagonal FOV).

The device produces a YUV 4:2:2 digital video data stream at up to 60^(a) frames per second. Video data is output via a USB 2.0 high speed (480 Mbps) interface, and allows simple interfacing to a host PC using generic video class drivers under the appropriate operating system (Windows XP). Video class compliance and vendor command sets allow development of other O/S drivers with relative ease.

Figure 1. Functional block diagram

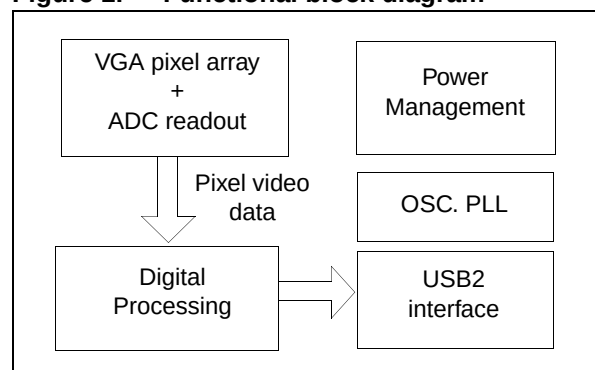

a. 60 fps max at QVGA resolution, 30 fps max at VGA resolution

Contents

1	Overview	4
1.1	Architecture	4
1.2	Technical specifications	4
1.3	Power consumption	4
1.4	Interface	5
1.4.1	USB	5
1.4.2	User customizing	5
1.4.3	Video data standard	5
1.4.4	Software	5
2	Block diagram	6
3	Pinout and pin description	7
3.1	Pinout (SmOP)	7
3.2	Pin description	7
4	Detailed description	8
4.1	Image data pipeline (IDP)	8
4.1.1	Overview	8
4.1.2	Dark level compensation	8
4.1.3	Flicker cancellation	8
4.1.4	Statistics	8
4.1.5	Lens shading correction	8
4.1.6	Channel offset	9
4.1.7	Channel gain	9
4.1.8	Defect correction	9
4.1.9	Interpolation (demosaic)	9
4.1.10	Color matrix	9
4.1.11	Sharpening	9
4.1.12	Gamma correction	9
4.1.13	RGB to YUV 422	9
4.1.14	Automatic frame rate control	10
4.1.15	Fade to black	10
4.2	ICB system control	10

4.2.1	System control overview	10
4.2.2	I ² C mastering of EEPROM	10
5	Register description	11
5.1	Register interpreter	11
5.2	Hardware control registers	12
5.2.1	Status	12
5.2.2	Setup	12
5.2.3	Man_Spec_AV	12
5.2.4	Man_Spec_I2C_Master	13
5.3	Firmware control registers	14
5.3.1	IDCodes	14
5.3.2	MiscControls	14
5.3.3	FadeToBlack	14
5.3.4	ExposureControls	15
5.3.5	FrameDimensionParameterHostInputs	16
5.3.6	WhiteBalanceControls	16
5.3.7	AutomaticFrameRateControl	17
5.3.8	VideoControlProcessingUnitDescriptors	19
6	Optical specifications	21
7	Electrical characteristics	22
7.1	Absolute maximum ratings	22
7.2	Operating conditions	22
7.3	DC electrical characteristics	23
7.4	AC electrical characteristics	23
7.4.1	USB2.0 interface	23
8	Package mechanical data	24
9	Glossary	26
10	Ordering information	27
11	Revision history	27

1 Overview

1.1 Architecture

The design includes an image control bus (ICB) mastering unit in the form of a microcontroller used for top-level autonomous management of power, SFPs, USB standard, video class command handling and translation to an IDP video processing module. The microcontroller is also used to run auto exposure and white balance functions.

There is one image data pipe (IDP).

1.2 Technical specifications

Table 1. Technical specifications

Image size	640 x 480 (VGA)
Pixel size	3.6 μm x 3.6 μm
Array size	2.32 mm x 1.74 mm
Exposure control	auto
Frame rate	auto or adjustable up to 60 fps
Clock frequency	12 MHz
Output format	USB2.0 (YUV2)
Output data rate	480 MHz (USB2)
Total current consumption from single 5 V supply ⁽¹⁾	70 mA
Operating temperature	-25 ^o C to 70 ^o C
Package type	SmOP2

1. Typical value VGA @ 30 fps

1.3 Power consumption

From a power consumption perspective the principal modes are:

1. Active - high speed streaming of video.
2. Suspend - standby mode, with lowest current consumption, in conformance with the USB2.0 standard.

1.4 Interface

1.4.1 USB

The details of the USB interface are summarized in [Table 2](#).

Table 2. Details of USB interface

Function	Description	Comments
Scope	Standard to which device will comply	USB endpoints
Control	USB spec. rev2.0 HS	Control (default, video)
		Interrupt (video class interrupt)
Video	USB video class rev1.0	Isochronous (video class data)

1.4.2 User customizing

Four special function port pins can allow PID/VID selections, support EEPROM (I²C mastering) and customization for driving LED(s) and sensing CTRL line states. VID/PIDs can be programmed into EEPROM.

1.4.3 Video data standard

The video processing pipeline delivers fully reconstructed VGA (640 x480) color data conforming to YUV 4:2:2 at up to 30 fps in accordance with video class specification (Packed YUV Format - YUV2, GUID 32595559-0000-0010-8000-00AA00389B71).

1.4.4 Software


As the VS6522 is video class, no software drivers are necessary to operate with Windows operating systems from XP SP2 onwards.

A unified windows driver is available to allow operation under Windows 2000. This driver is also compatible with Windows XP, XP64, Vista 32 and Vista 64. Although the driver is not necessary for use with these operating systems, it does offer additional benefits to the user, such as the face finding and tracking function, to keep the user's face in frame when video-conferencing for example.

A linux driver is available to allow the VS6522 to be used with a linux based system.

2 Block diagram

Figure 2. Block diagram of VS6522

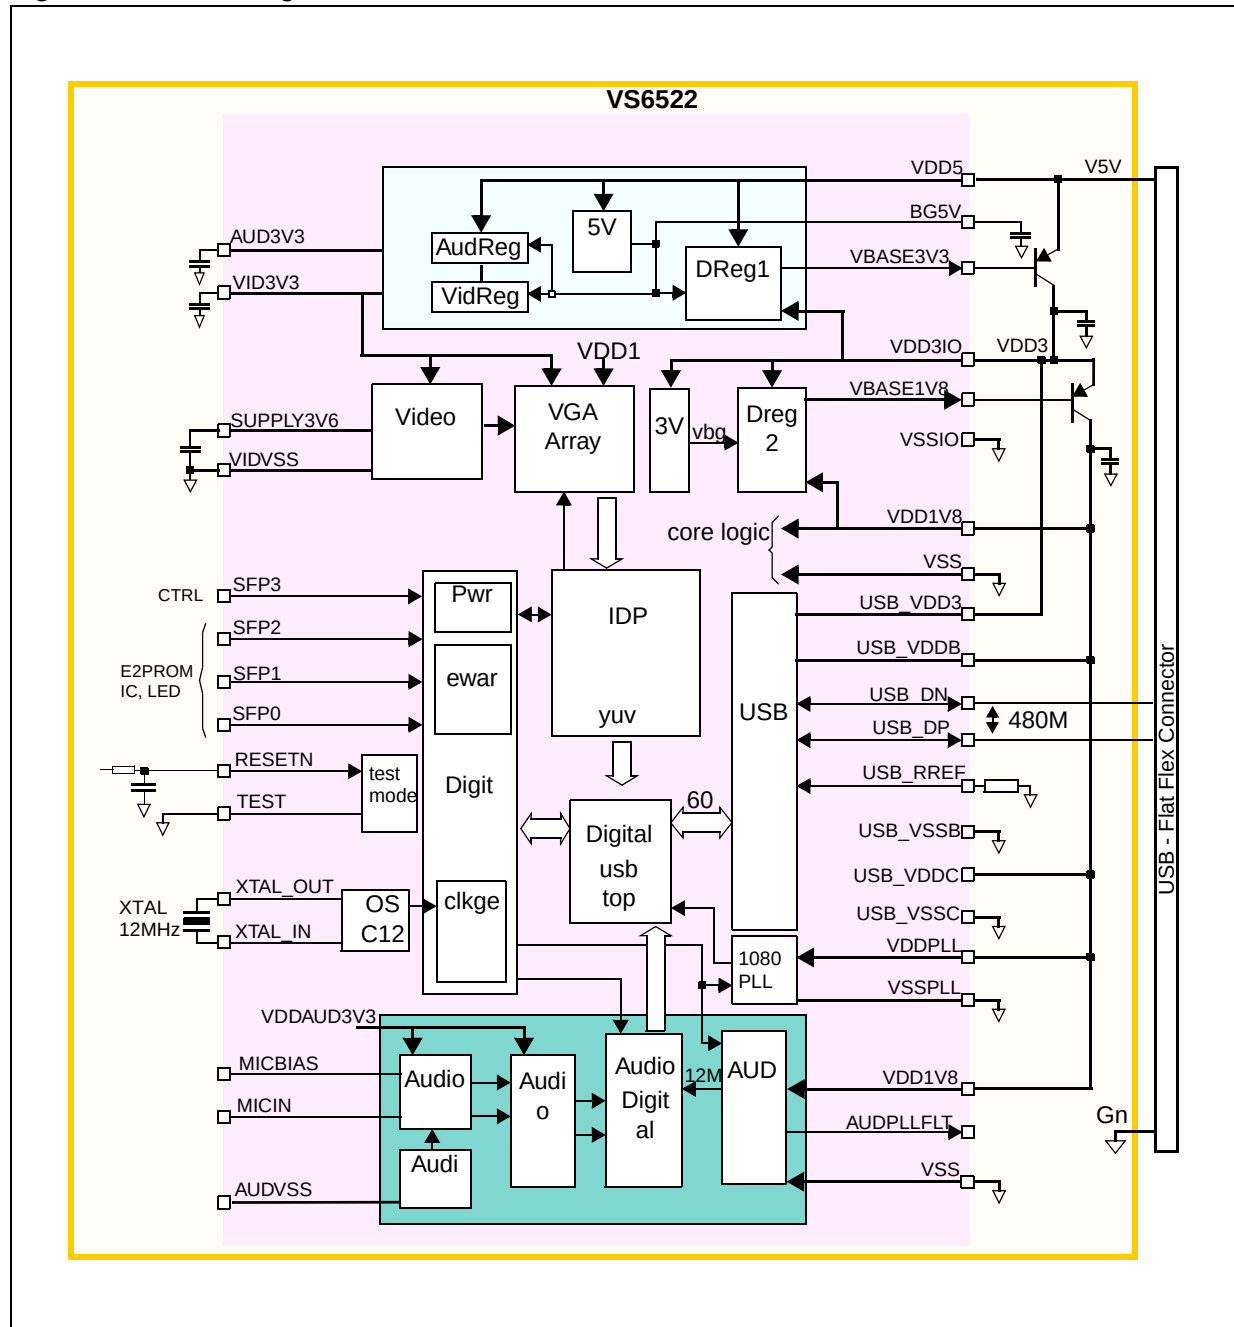


3 Pinout and pin description

3.1 Pinout (SmOP)

The device is available in a SmOP (Smart Optical Package), as shown in [Figure 3](#):

Figure 3. Device pinout in SmOP package

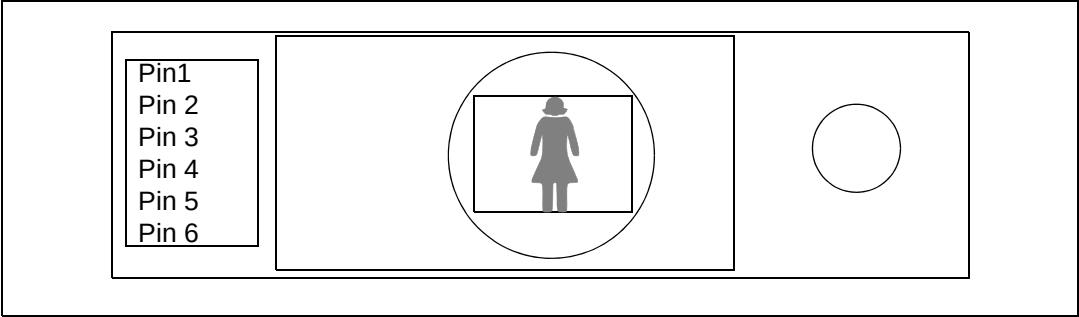

3.2 Pin description

Table 3. Pin description and package pin for LGA36

Pin number	Pin name	Pin type	Description	Comments
1	SCREEN			Internally attached to GND
2	CTRL	I	Controls simultaneous mirror & flip	Internally pulled high for normal operation
3	USB VCC	I	+5v supply from USB host	
4	USB_DN	I/O/Z	USB D- signal	
5	USB_DP	I/O/Z	USB D+ signal	
6	GND	I		

4 Detailed description

4.1 Image data pipeline (IDP)

4.1.1 Overview

The video processing blocks included in the VS6522 IDP are listed below:

- Dark level compensation
- Flicker cancellation
- Statistics
- Lens shading correction
- Channel offset
- Channel gain
- Defect correction
- Interpolation
- Color matrix
- Sharpening
- Gamma correction
- RGB to YUV 422
- Automatic frame rate control
- Fade to black

4.1.2 Dark level compensation

A dedicated DSP uses information from special dark lines within the pixel array to apply an offset to the video data and ensure a consistent 'black' level.

4.1.3 Flicker cancellation

The 50/60 Hz flicker frequency present in the lighting (due to fluorescent lighting) can be cancelled by the system.

4.1.4 Statistics

The function of the statistics processor is to gather statistics on Bayer IDP data. The statistics are made available to the Imaging Control Bus Host for tasks such as automatic exposure control and white balance.

4.1.5 Lens shading correction

The lens shading correction module is used to reduce the visible effect of vignetting where inherent problems in lens design can cause non-uniformities in levels of light transmission across the image plane. The extent of transmission loss is primarily a function of lens quality and fabrication tolerances, but generally increases radially from the lens' optical centre towards the edges of the scene.

Typically, the visual effect is at its worst where the distance from the optical centre to the edge of the image is at its maximum and manifests itself as the familiar 'darkening of the image corners'.

4.1.6 Channel offset

The channel offset module is used to add or subtract a programmable offset from each of the four bayer color channels of the incoming IDP. These offsets are typically used to remove a data pedestal or cancel a dark offset introduced at an earlier stage in the pipe.

4.1.7 Channel gain

The channel gain module is used to apply a programmable gain to each of the four bayer color channels of input data. These gains are used as controls of Automatic Exposure Control (AEC) and Automatic White Balance (AWB).

4.1.8 Defect correction

This function runs a defect correction filter over the data in order to remove defects from the final output. This function has been optimized to attain the minimum level of defects from the system.

4.1.9 Interpolation (demosaic)

The interpolation module converts bayer pixel data to RGB and applies an anti-alias filter to the data.

4.1.10 Color matrix

The color matrix correction transformation is performed on the outputs of the interpolation module.

4.1.11 Sharpening

The sharpening module's function is to add a certain amount of peaking components to the original interpolated RGB. Indeed, the interpolation process involves a certain degree of low-pass filtering that blurs the original sharpness of the image.

In order to realize 2-dimensional sharpness easily, the sharpening filter is only applied on the green components (green carries the highest luma component). The output of the filter is re-injected into the R, G, and B components from the matrix, via a process called coring.

4.1.12 Gamma correction

The gamma correction module applies a non-linear compensation to the IDP RGB data stream in order to achieve correct reproduction of intensity on the host display.

4.1.13 RGB to YUV 4:2:2

Conversion of RGB to YUV 4:2:2. The YUV comprises luminance (Y) and chrominance (U and V) components.

4.1.14 Automatic frame rate control

When enabled, the automatic frame rate control will reduce the frame rate in low light levels to improve image quality. By default the minimum frame rate that the device will use is 5 fps.

4.1.15 Fade to black

Using programmable levels the microprocessor will fade the output signal to black. This ensures that under the darkest conditions, when the image is not of sufficient quality, the device will output black. This operation is achieved by scaling the RGB to the YCbCr matrix.

4.2 ICB system control

4.2.1 System control overview

In the VS6522, the embedded microcontroller has five main functions:

- USB management
- Power management
- SFP management
- Auto exposure control (AEC)

The task of the exposure control is to ensure that all scenes are correctly exposed to provide a good level of contrast. In normal operation the VS6522 will use hardware-generated statistics to determine appropriate exposure settings for a particular scene and adjust the system accordingly to give a correctly exposed image.

- Auto white balance (AWB)

Using hardware-generated statistics the microcontroller adjusts the gains applied to the individual color channels in order to achieve a correctly color balanced image.

4.2.2 I²C mastering of EEPROM

This allows the customizing of VID, PID or manufacturer string via the optionally fitted EEPROM.

5 Register description

5.1 Register interpreter

Register contents represent different data types as described in [Table 4](#).

Table 4. Register naming prefix

Prefix	Description
UIA_BYTE = b	One Byte unsigned data
UIA_UINT16 = w	Two Byte data
UIA_UINT16 = uw	Two Byte unsigned data
Flag_e(F) = f	One byte data. Only two possible values
UIA_FLOAT = fp	Two byte data. Expect value in Floating Point 16 notation
UIA_INT8 = sb	One Byte signed data

Registers not listed in this datasheet should be considered as reserved or read-only and should **not** be written to, as this may cause unpredictable results.

The VS6522 registers can be written to using the extension units within the Windows video class.

All register locations contain an 8-bit byte. However, certain parameters require 16 bits to represent them and are therefore stored in more than 1 location.

Note: For all 16 bit parameters, the MSB register must be written before the LSB register.

The data stored in each location can be interpreted in different ways as shown below. Register contents represent different data types as described in [Table 5](#).

Table 5. Data type

Data Type	Description
BYTE	Single field register 8 bit parameter
UINT_16	Multiple field registers - 16 bit parameter
FLAG_e	Bit 0 of register must be set/cleared
CODED	Coded register - function depends on value written
FLOAT	Float Value

Float number format

Float 900 is used in ST co-processors to represent floating point numbers in 2 bytes of data. It conforms to the following structure:

Bit[15] = Sign bit (1 represents negative)

Bit[14:9] = 6 bits of exponent, biased at decimal 31

Bit[8:0] = 9 bits of mantissa

5.2 Hardware control registers

5.2.1 Status

Table 6. Status

Index	STATUS [Read only]	
0x0002	REVISION_NUMBER	
	Default value	0x04
	Purpose	Identifies the cut of silicon ⁽¹⁾
	Type	BYTE
	Possible values	<0x00> Cut 1.0 <0x01> Cut 1.1 <0x02> Cut 1.2 <0x03> Cut 1.3 <0x04> Cut 1.4

1. This document refers to cut 1.4 of silicon.

5.2.2 Setup

Table 7. Setup

Index	SETUP	
0x0002	IMAGE_ORIENTATION	
	Default value	0x00
	Purpose	Selects the orientation of the image
	Type	BYTE
	Possible values	<0x00> Normal <0x01> Horizontal flip (mirrored) <0x02> Vertical flip <0x03> Horizontal & vertical flip

5.2.3 Man_Spec_AV

Table 8. Man_Spec_AV

Index	MAN_SPEC_AV	
0x322a	R2_COEFF	
	Default value	0x04
	Purpose	Radial R2 anti-vignetting (lens shading) coefficient, to allow lightening and darkening of image corners (for special effects, as well as standard av compensation).
	Type	BYTE
	Possible values	-127 to 127

5.2.4 Man_Spec_I2C_Master

Table 9. Man_Spec_I2C_Master

Index	MAN_SPEC_I2C_MASTER	
0x3350	CTRL	
	Default value	0x07
	Purpose	Control for the I2C
	Type	CODED
	Possible values	<0> SCL <1> SDA <2> Manual mode <4:3> Clock divider
0x3351	CMD	
	Default value	0x00
	Purpose	I2C command
	Type	CODED
	Possible values	<0> Start <1> Stop <2> Read <3> Multiple read
0x3352	WRITE_BYTE	
	Default value	0x00
	Purpose	
	Type	BYTE
	Possible values	0 to 255
0x3353	READ_BYTE [read only]	
	Default value	0x00
	Purpose	
	Type	BYTE
	Possible values	0 to 255
0x3354	STATUS [read only]	
	Default value	0x01
	Purpose	I2C Status
	Type	CODED
	Possible values	<0> Command processed <1> Acknowledge received <2> EEPROM present <3> EEPROM error

5.3 Firmware control registers

5.3.1 IDCodes

Table 10. IDCodes

Index	IDCodes ⁽¹⁾	
0x8008	idVendor	
	Default value	0x0553
	Purpose	Vendor identification
	Type	UINT_16
	Possible values	0x0000 to 0xffff ⁽¹⁾
0x800a	idProduct	
	Default value	0x0522
	Purpose	Product identification
	Type	UINT_16
	Possible values	0x0000 to 0xffff ⁽¹⁾

1. This data is stored in little endian format: the LSB is located at the lower index.

5.3.2 MiscControls

Table 11. MiscControls

Index	MiscControls	
0x84dc	fDisableVideoClassGUI	
	Default value	0x00
	Purpose	Disables the GUI
	Type	FLAG_e
	Possible values	<0x00> GUI enabled <0x01> GUI disabled

5.3.3 FadeToBlack

Table 12. FadeToBlack

Index	FadeToBlack	
0x85cb	fDisable	
	Default value	0x00
	Purpose	Disables the Fade to Black
	Type	FLAG_e
	Possible values	<0x00> Fade to Black enabled <0x01> Fade to Black disabled

Table 12. FadeToBlack (continued)

Index	FadeToBlack	
0x85cc	fpBlackValue	
	Default value	0x0000 (0.0000)
	Purpose	Black Value
	Type	FLOAT
	Possible values	-8581545984 to 8581545984 (0xffff to 0x7fff)
0x85ce	fpDamperLowThreshold	
	Default value	0x6a25 (4497408)
	Purpose	Low Threshold for exposure for calculating the damper slope
	Type	FLOAT
	Possible values	-8581545984 to 8581545984 (0xffff to 0x7fff)
0x85d0	fpDamperHighThreshold	
	Default value	0x6c9f (10993664)
	Purpose	High Threshold for exposure for calculating the damper slope
	Type	FLOAT
	Possible values	-8581545984 to 8581545984 (0xffff to 0x7fff)
0x85d2	fpDamperOutput [read only]	
	Default value	0x00 (0.0000)
	Purpose	Minimum possible damper output.
	Type	FLOAT
	Possible values	0 to 1 (0x0000 to 0x3e00)

5.3.4 ExposureControls

Table 13. ExposureControls

Index	ExposureControls	
0x8510	bAntiFlickerMode	
	Default value	<0> AntiFlickerMode_Inhibit
	Purpose	Anti flicker mode
	Type	CODED
	Possible values	<0> AntiFlickerMode_Inhibit <1> AntiFlickerMode_ManualEnable <2> AntiFlickerMode_AutomaticEnable

5.3.5 FrameDimensionParameterHostInputs

Table 14. FrameDimensionParameterHostInputs

Index	FrameDimensionParameterHostInputs	
0x85fa	bLightingFrequency_Hz	
	Default value	0x64
	Purpose	AC Frequency - used for flicker free time period calculations this mains frequency determines the flicker free time period.
	Type	BYTE
	Possible values	0 to 255 Note: The value is double the desire frequency in Hz. i.e. 0x64 = 100 which equates to 50 Hz.

5.3.6 WhiteBalanceControls

Table 15. WhiteBalanceControls

Index	WhiteBalanceControls	
0x8652	bMode	
	Default value	0x00
	Purpose	Disables the GUI
	Type	CODED
	Possible values	<0> OFF - No White balance, all gains will be unity in this mode <1> AUTOMATIC - Automatic mode, relative step is computed here <3> MANUAL_RGB - User manual mode, gains are applied manually <4> DAYLIGHT_PRESET - DAYLIGHT and all the modes below, fixed value of gains are applied here. <5> TUNGSTEN_PRESET <6> FLUORESCENT_PRESET <7> HORIZON_PRESET <8> MANUAL_COLOUR_TEMP <9> FLASHGUN_PRESET
0x8653	bManualRedGain	
	Default value	0x00
	Purpose	User setting for Red Channel gain.
	Type	BYTE
	Possible values	0 to 255 Applied_Red_Gain = (1 + bManualRedGain / 128) / MinGain Where MinGain = the smallest value from either Applied_Red_Gain , Applied_Green_Gain or Applied_Blue_Gain

Table 15. WhiteBalanceControls (continued)

Index	WhiteBalanceControls	
0x8654	bManualGreenGain	
	Default value	0x00
	Purpose	User setting for Green Channel gain.
	Type	BYTE
	Possible values	0 to 255 $\text{Applied_Green_Gain} = (1 + \text{bManualGreenGain} / 128) / \text{MinGain}$ Where MinGain = the smallest value from either Applied_Red_Gain , Applied_Green_Gain or Applied_Blue_Gain
0x8655	fManualBlueGain	
	Default value	0x00
	Purpose	User setting for Blue Channel gain.
	Type	BYTE
	Possible values	0 to 255 $\text{Applied_Blue_Gain} = (1 + \text{bManualBlueGain} / 128) / \text{MinGain}$ Where MinGain = the smallest value from either Applied_Red_Gain , Applied_Green_Gain or Applied_Blue_Gain

5.3.7 AutomaticFrameRateControl

Table 16. AutomaticFrameRateControl

Index	AutomaticFrameRateControl	
0x8680	bMode	
	Default value	0x00
	Purpose	Sets manual or auto frame rate
	Type	FLAG_e
	Possible values	<0x00> Manual frame rate. <0x01> Automatic frame rate.
0x8681	bImpliedGainThresholdLow_num	
	Default value	0x05
	Purpose	Numerator for calculation of low threshold of automatic framerate control
	Type	BYTE
	Possible values	0 to 255

Table 16. AutomaticFrameRateControl (continued)

Index	AutomaticFrameRateControl	
0x8682	bImpliedGainThresholdLow_den	
	Default value	0x01
	Purpose	Denominator for calculation of low threshold of automatic framerate control.
	Type	BYTE
	Possible values	0 to 255
0x8683	bImpliedGainThresholdHigh_num	
	Default value	0x08
	Purpose	Numerator for calculation of high threshold of automatic framerate control
	Type	BYTE
	Possible values	0 to 255
0x8684	bImpliedGainThresholdHigh_den	
	Default value	0x01
	Purpose	Denominator for calculation of high threshold of automatic framerate control
	Type	BYTE
	Possible values	0 to 255
0x8685	bUserMinimumFrameRate_Hz	
	Default value	0x05
	Purpose	Sets the minimum framerate employed when in automatic framerate mode.
	Type	BYTE
	Possible values	0 to 255
0x8686	bUserMaximumFrameRate_Hz	
	Default value	0x3c
	Purpose	Sets the maximum framerate employed when in automatic framerate mode.
	Type	BYTE
	Possible values	0 to 255
0x8687	bRelativeChange_num	
	Default value	0x02
	Purpose	Numerator for calculation of relative change in framerate.
	Type	BYTE
	Possible values	0 to 255

Table 16. AutomaticFrameRateControl (continued)

Index	AutomaticFrameRateControl	
0x8688	bRelativeChange_den	
	Default value	0x02
	Purpose	Denominator for calculation of relative change in framerate
	Type	BYTE
	Possible values	0 to 255

5.3.8 VideoControlProcessingUnitDescriptors

Table 17. VideoControlProcessingUnitDescriptors

Index	VideoControlProcessingUnitDescriptors ⁽¹⁾	
0x8709	Brightness	
	Default value	0x0018
	Purpose	Video class brightness control
	Type	UINT_16
	Possible values	0x0000 to 0x0025 ⁽¹⁾
0x870b	Contrast	
	Default value	0x007c
	Purpose	Video class contrast control
	Type	UINT_16
	Possible values	0x0000 to 0x00c8 ⁽¹⁾
0x870d	Saturation	
	Default value	0x0079
	Purpose	Video class saturation control
	Type	UINT_16
	Possible values	0x0000 to 0x00c8 ⁽¹⁾
0x870f	Sharpness	
	Default value	0x000f
	Purpose	Video class sharpness control
	Type	UINT_16
	Possible values	0x0000 to 0x003f ⁽¹⁾

Table 17. VideoControlProcessingUnitDescriptors (continued)

Index	VideoControlProcessingUnitDescriptors ⁽¹⁾	
0x8711	Gamma	
	Default value	0x0012
	Purpose	Video class gamma control
	Type	UINT_16
	Possible values	0x0001 to 0x001f ⁽¹⁾

1. This data is stored in little endian format: the LSB is located at the lower index.

6 Optical specifications

Table 18. Optical specifications⁽¹⁾

Parameter	Min.	Typ.	Max.	Unit
Optical format		1/6		inch
Effective focal length		2.5		mm
Aperture (F number)		2.8		
Horizontal field of view	46	49	51	deg.
Vertical field of view	35	37	39	deg.
Diagonal field of view ⁽²⁾	57	59	61	deg.
Depth of field ⁽³⁾	20		infinity	cm
TV distortion	-1.5		1.5	%

1. All measurements made at 23° C ± 2° C

2. Value determined through calculation

3. By design the device has an acceptable quality between hyperfocal distance /2 and infinity.

7 Electrical characteristics

7.1 Absolute maximum ratings

Table 19. Absolute maximum ratings

Symbol	Parameter	Min.	Max.	Unit
T _{STO}	Storage temperature	-25	85	° C
V _{5V}	5 V supply	4.1	5.6	V

Caution: Stresses above those listed under “Absolute Maximum Ratings” can cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

7.2 Operating conditions

Table 20. Supply specifications

Symbol	Parameter	Min.	Max.	Unit
T _{AF}	Operating temperature, functional (Camera is electrically functional)	-25	70	° C
T _{AN}	Operating temperature, nominal (Camera produces acceptable images)	-25	55	° C
T _{AO}	Operating temperature, optimal (Camera produces optimal optical performance)	5	30	° C
V _{5V}	5 V supply	4.1	5.6	V

7.3 DC electrical characteristics

Note: Over operating conditions unless otherwise specified.

Table 21. DC electrical characteristics (non-characterized data, guide values only)⁽¹⁾

Symbol	Description	Test conditions	Min.	Typ.	Max.	Unit
V_{IL}	Input low voltage		-0.3	TBD	$0.3 V_{5V}$	V
V_{IH}	Input high voltage		$0.7 V_{5V}$	TBD	$V_{5V} + 0.3$	V
V_{OL}	Output low voltage	$I_{OL} < 2.29 \text{ mA}$	TBD	TBD	$0.4 V_{5V}$	V
V_{OH}	Output high voltage	$I_{OH} < 1.48 \text{ mA}$	2.6	TBD	TBD	V
I_{IL}	Input leakage current Input pins I/O pins	$0 < V_{IN} < V_{DD}$	TBD	TBD	+/- 10 +/- 1	μA μA
C_{IN}	Input capacitance, SCL	$T_A = 25^\circ \text{C}$, freq = 1 MHz	TBD	TBD	TBD	pF
C_{OUT}	Output capacitance	$T_A = 25^\circ \text{C}$, freq = 1 MHz	TBD	TBD	TBD	pF
$C_{I/O}$	I/O capacitance, SDA	$T_A = 25^\circ \text{C}$, freq = 1 MHz	TBD	TBD	TBD	pF

1. Applies to the CTRL pin only.

Table 22. Typical current consumption (non-characterised data, guide values only)

Symbol	Description	Suspend	Active ⁽¹⁾	Video ⁽²⁾	Units
I_{USBVCC}	Total 5 V supply to device	0.62	34.5	69.5	mA

1. VS6522, enumerated but not streaming

2. VS6522, streaming 30 fps VGA

7.4 AC electrical characteristics


7.4.1 USB2.0 interface

Conforms to the USB2.0 chapter 7.1.

8 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK[®] packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an STMicroelectronics trademark. ECOPACK specifications are available at: www.st.com.

Figure 4. Package drawing

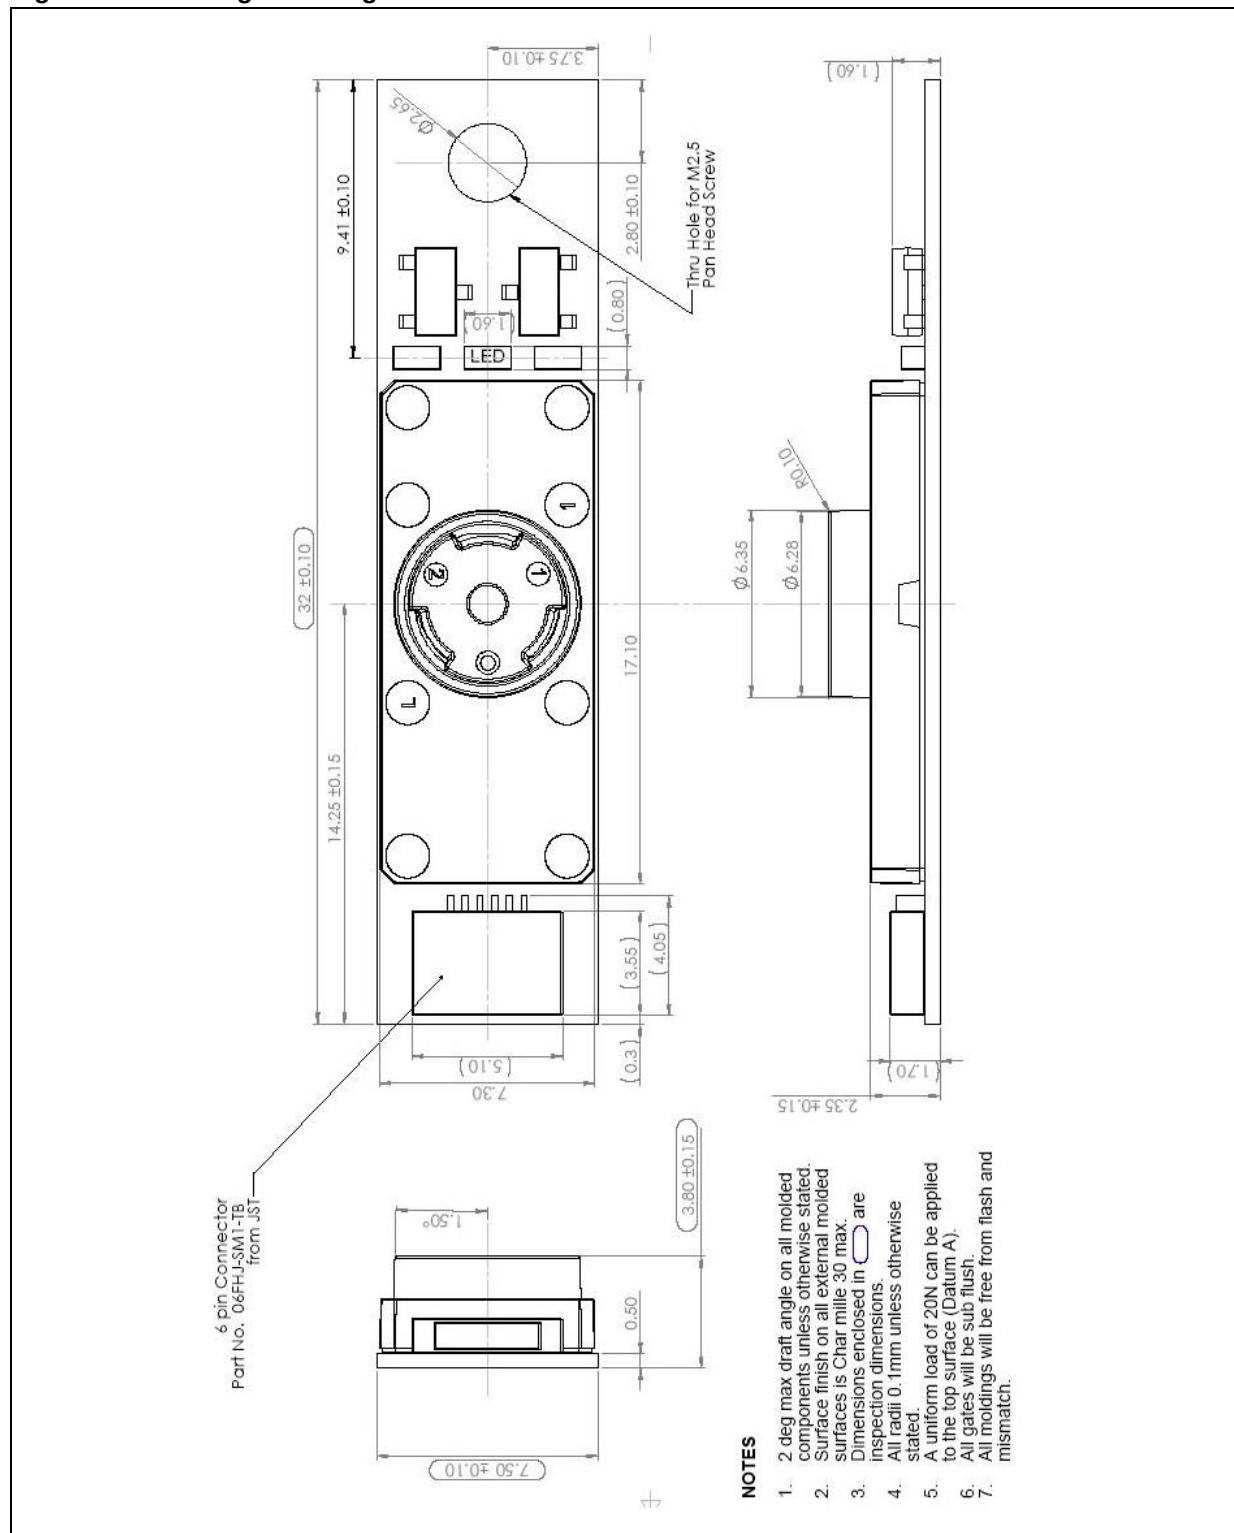

9 Glossary

Table 23. Glossary

Acronym	Description
ADC	Analogue to Digital Converter
ADP	Audio Data Pipeline
AEC	Automatic Exposure Control
AGC	Automatic Gain Control
AWB	Automatic White Balance
CMOS	Complementary Metal Oxide Semiconductor
EEPROM	Electrically Erasable Programmable Read Only Memory
FOV	Field of View
FIFO	First In First Out
ICB	Image Control Bus
IDP	Image Data Pipeline
JEDEC	Joint Electron Device Engineering Council
LED	Light Emitting Diode
LGA	Land Grid Array
LSB	Least Significant Bit
MSB	Most Significant Bit
OSC	Oscillator
PCM	Pulse Coded Modulation
PID	Product Identification
PLL	Phase Locked Loop
POA	Package Outline Assembly
RGB	Red Green Blue
SCL	Serial Clock
SDA	Serial Data
SFP	Special Function Pin (Port)
SmOP	Smart Optical Package
USB	Universal Serial Bus
VGA	Video Graphic Array
VID	Vendor Identification
YUV	Y stands for the luminance component (the brightness) and U and V are the chrominance (color) components

10 Ordering information

Table 24. Order codes

Part number	Package	Packing
VS6522Q0MV	SmOP2	Tray

11 Revision history

Table 25. Document revision history

Date	Revision	Changes
16-Mar-2007	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com