

LB1609

3006B

Monolithic Digital IC

T-52-13-25

Compact DC Motor Driver

©2599A

Use

- Control of rotational speed of tachometer generator-provided compact DC motor used in cassette tape recorder, tape recorder, FDD, etc.

Features

- Applicable to various motors from small motors to large motors by selecting an external PNP transistor
- The motor control pin can be used to turn OFF an external PNP transistor (stop mode).
- Also applicable to hall motors

Absolute Maximum Ratings at Ta=25°C

			unit
Maximum Supply Voltage	V_{CC} max	-0.3 to +17	V
Maximum Output Current	I_{OUT}	-30	mA
Allowable Power Dissipation	P_d max	600	mW
Operating Temperature	Topg	-10 to +60	°C
Storage Temperature	Tstg	-30 to +125	°C


Allowable Operating Conditions at Ta=25°C

			unit
Supply Voltage	V_{CC}	8 to 16	V
FG Input Voltage	V_{iFG}	3	Vp-p

Electrical Characteristics at Ta=25°C, $V_{CC}=12V$

			min	typ	max	unit
Current Dissipation	I_{CC}			8.5	15	mA
Vref Output Voltage	Vref	Iref=0	4.5	5.0	5.5	V
Vref Output Voltage	ΔV_{ref}	Iref=0 to 12mA	-0.2	-0.05		V
Load Regulation						
Preamplifier Input Pin	I_B	Pin 16 GND	-0.05	-0.02		uA
Bias Current						
Preamplifier	V_{OFF}	Measured in closed-loop mode		± 2		mV
Offset Voltage						
Schmitt Input Voltage Vhy				100	200	mV
Hysteresis Width						

Continued on next page.

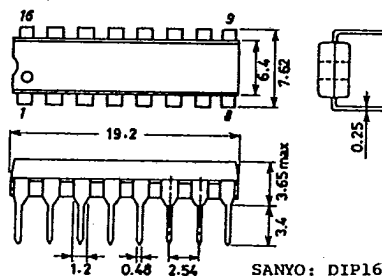Case Outline 3006B-D16IC
(unit:mm)

SANYO: DIP16

9047TA, TS No.2599-1/3

394


T-52-13-25

			min	typ	max	unit
Comparator Output H Level Voltage	V _{com} (H)	Pin 7=2.4V	6.5	7.7		V
Comparator Output L Level Voltage	V _{com} (L)	Pin 7=1.5V		0.2	0.35	V
Predriver Input ON-State Voltage	V _{IN} (ON)	I _{IN} =10uA		1.5		V
Predriver Output Saturation Voltage	V _{OUT} (sat)	I _{OUT} =-20mA, V _{IN} =0V		0.9	2.0	V
Predriver Output Leakage Current	I _{OUT} (OL)	V _{OUT} =17V, V _{IN} =2.2V			2.0	uA
Predriver DC Current Gain	h _{FE}	I _{OUT} =-20mA		15000		-
STOP Pin Input Threshold Voltage	V _{STOP} (th)			1.5		V

*: Must be adjusted.

T-52-13-25

Sample Application Circuit II (Forward/reverse control)

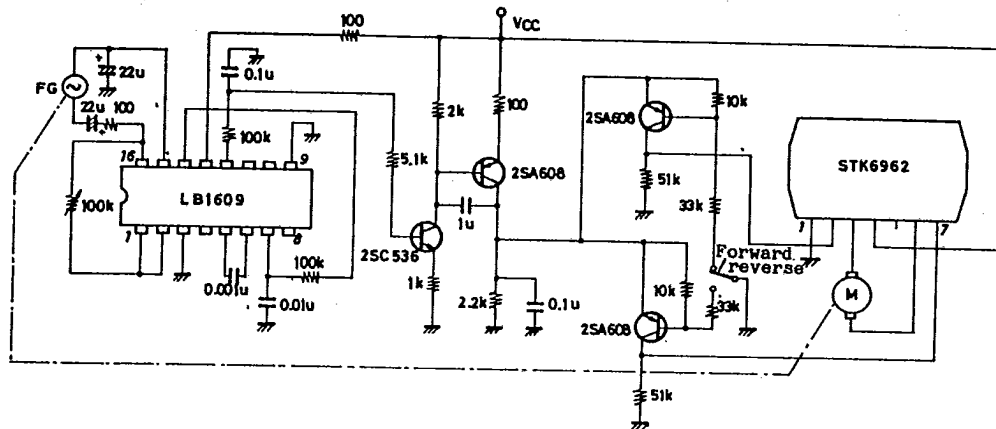

It is necessary for forward→reverse switchover to take 15usec. or more. The circuit constants may be changed depending on a motor to be used.

Application Characteristics

