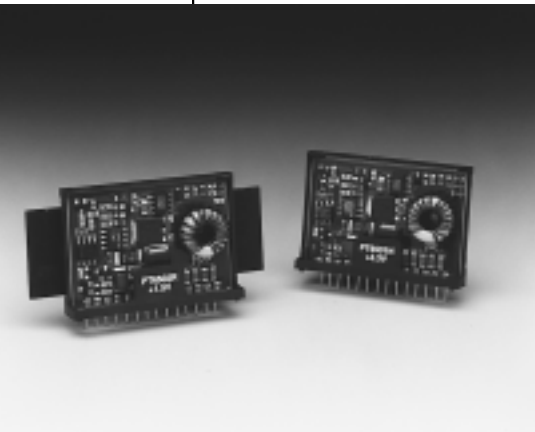



PT6500 Series**8 AMP ADJUSTABLE ISR
WITH SHORT-CIRCUIT PROTECTION**[Application Notes](#)
[Mechanical Outline](#)
[Product Selector Guide](#)

- 8A Single Device Power
- Up to 90% efficiency (PT6501)
- Small SIP Footprint
- Standby Function
- Internal Short Circuit Protection
- Over-Temperature Protection
- Adjustable Output Voltage

The PT6500 series is Power Trends' new high performance +3.1 to 6V input, 8 Amp, 14-Pin SIP (Single In-line-Package) Integrated Switching Regulator (ISR). This high-perfor-

mance ISR allows easy integration of high-speed, low-voltage Pentium processors and their support logic into existing 3.3V or 5V systems without redesigning the central power supply. The high-performance PT6502 solves the problem of providing the low terminating voltages required by BTL/Futurebus+, CTT, HP, and GTL Buses from existing 3.3V or 5V power rails without redesigning the central power supply.

Standard Application

C₁ = Required 330µF electrolytic
C₂ = Required 330µF electrolytic

Pin-Out Information


Pin	Function
1	Remote Sense
2	Do not connect
3	STBY*-Standby
4	V _{in}
5	V _{in}
6	V _{in}
7	GND
8	GND
9	GND
10	GND
11	V _{out}
12	V _{out}
13	V _{out}
14	V _{out} Adjust

Ordering Information

PT6501□ = 3.3 Volts
 †PT6502□ = 1.5 Volts
 PT6503□ = 2.5 Volts
 PT6504□ = 3.6 Volts
 †PT6505□ = 1.2 Volts
 †PT6506□ = 1.8 Volts
 †PT6507□ = 1.3 Volts
 †PT6508□ = 1.7 Volts
 †3.3V Input Bus Capable

PT Series Suffix (PT1234X)

Case/Pin Configuration	Heat Tab Configuration	
	None	Side
Vertical Through-Hole	N	R
Horizontal Through-Hole	A	G
Horizontal Surface Mount	C	B

**Specifications**

Characteristics (T _a =25°C unless noted)	Symbols	Conditions	PT6500 SERIES			
			Min	Typ	Max	Units
Output Current	I _O	Over V _{in} range	0.1*	—	8.0	A
Current Limit	I _{cl}	V _{in} =+5V	—	13.0	20.0	A
Short Circuit Current	I _{sc}	V _{in} =+5V	—	15.0	—	Apk
Input Voltage Range	V _{in}	0.1 ≤ I _O ≤ 8.0A V _O =2.5V and 3.3V V _O =1.5V, 1.2V, 1.3V V _O =3.6V	4.5 3.1 4.8	—	6 6 6	V V V
Output Voltage Tolerance	ΔV _O	V _{in} = +5V, I _O = 8.0A T _a = 0 to +70°C	V _O -0.1	—	V _O +0.1	V
Output Adjust Range	V _O	V _{nom} = 3.3V V _{adj} = (PT6501) V _{nom} = 1.5V V _{adj} = (PT6502) V _{nom} = 2.5V V _{adj} = (PT6503) Pin 14 to V _O or GND V _{adj} = (PT6504)	2.25 1.27 1.80 2.50	— — — —	4.20 2.65 3.50 4.30	V _{in} min=3.1V or V _O +1.2V (whichever is greater)
Line Regulation	Reg _{line}	4.5V ≤ V _{in} ≤ 6.0V, I _O = 8.0A (PT6501/4) 3.1V ≤ V _{in} ≤ 6.0V, I _O = 8.0A (PT6502) 4.5V ≤ V _{in} ≤ 6.0V, I _O = 8.0A (PT6503)	— — —	±7 ±3 ±7	±17 ±8 ±13	mV
Load Regulation	Reg _{load}	0.1 ≤ I _O ≤ 8.0A, V _{in} = +5V (PT6501/4) (PT6502) (PT6503)	— — —	±17 ±12 ±13	±33 ±23 ±25	mV
V _O Ripple/Noise	V _n	V _{in} = +5V, I _O = 8.0 Amp	—	50	—	mVpp
Transient Response with C _O = 330µF	t _{tr} V _{os}	I _O step from 4A to 8.0A V _O over/undershoot	— —	100 150	— —	µsec mV
Efficiency	η	V _{in} = +5V, I _O = 3.0A (PT6501/6504) (PT6502) (PT6503) V _{in} = +5V, I _O = 8.0A (PT6501/6504) (PT6502) (PT6503)	— — — — — —	90 76 85 83 68 76	— — — — — —	% % % % % %

* ISR will operate down to no load with reduced specifications.

Note: The PT6500 Series requires a 330µF electrolytic or tantalum input and output capacitor for proper operation in all applications.
See PT6000/7000 Series Capacitor application note.

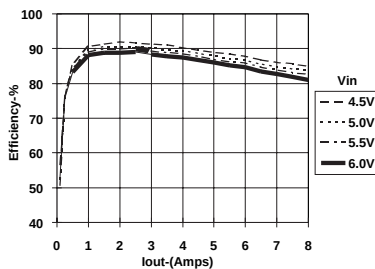
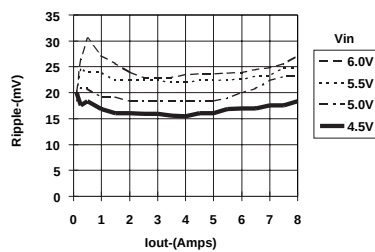
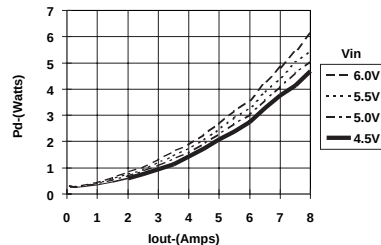
PT6500 Series**Specifications (continued)**

Characteristics (T _a =25°C unless noted)	Symbols	Conditions	PT65000 SERIES			
			Min	Typ	Max	Units
Switching Frequency	f_o	Over V_{in} and I_o ranges	475	600	725	KHz
Absolute Maximum Operating Temperature Range	T _a		0	—	+85	°C
Recommended Operating Temperature Range	T _a	V _{in} = +5V, I _o = 6.0A Free Air Convection (40-60LFM)	0	—	+70**	°C
Thermal Resistance	θ_{ja}	Free Air Convection (40-60LFM)	—	15	—	°C/W
Storage Temperature	T _s	—	-40	—	+125	°C
Mechanical Shock		Per Mil-STD-883D, Method 2002.3, 1msec, half sine, fixture mounted	—	500	—	G's
Mechanical Vibration			—	7.5	—	G's
Weight			—	23	—	grams

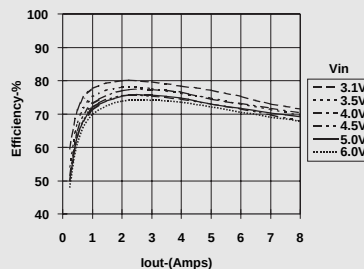
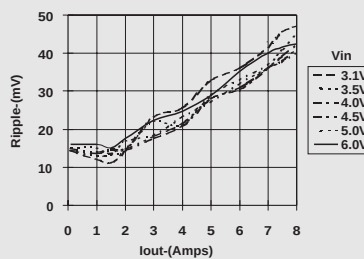
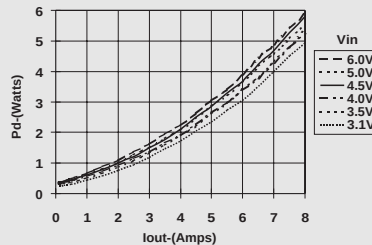
** See Thermal Derating charts.

Note: The PT6500 Series requires a 330µF electrolytic or tantalum input and output capacitor for proper operation in all applications.**C H A R A C T E R I S T I C D A T A****PT6501, 3.3 VDC, V_{in}=5.0V**

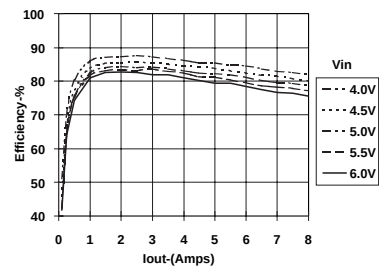
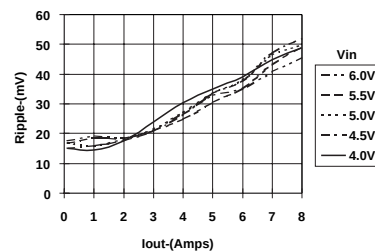
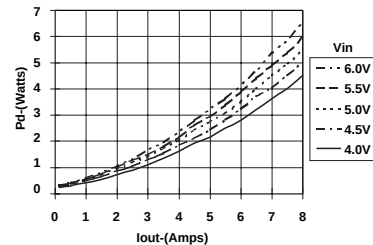
(See Note 1)

Efficiency vs Output Current**Ripple vs Output Current****Power Dissipation vs Output Current****PT6502, 1.5 VDC, V_{in}=5.0V**

(See Note 1)

Efficiency vs Output Current**Ripple vs Output Current****Power Dissipation vs Output Current****PT6503, 2.5 VDC, V_{in}=5.0V**

(See Note 1)

Efficiency vs Output Current**Ripple vs Output Current****Power Dissipation vs Output Current****Note 1:** All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

PT6500 THERMAL DATA

THERMAL DERATING CURVES

Air Flow (LFM)

60

200

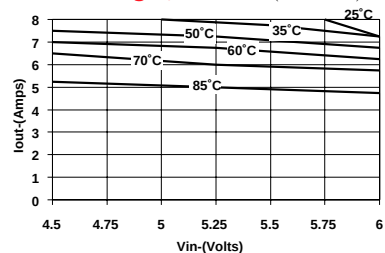
300

PT6501 (See Note 1)

No Heat Tab

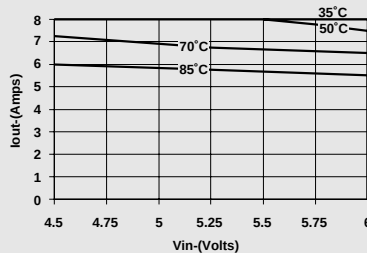
Thermal Derating (T_a)

(See Note 2)



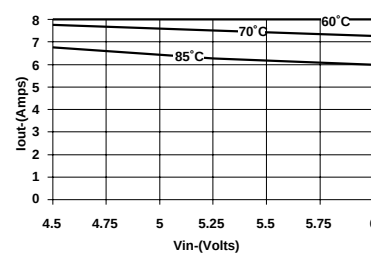
Thermal Derating (T_a)

(See Note 2)



Thermal Derating (T_a)

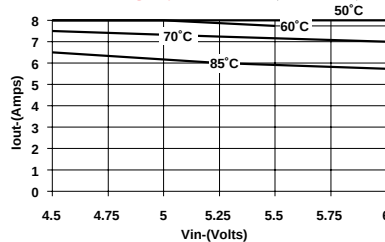
(See Note 2)



Heat Tab

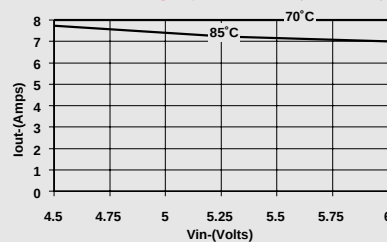
Thermal Derating (T_a)

(See Note 2)



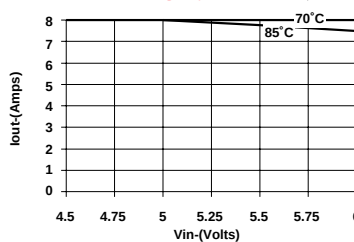
Thermal Derating (T_a)

(See Note 2)



Thermal Derating (T_a)

(See Note 2)

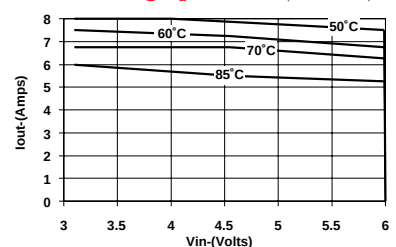


PT6502 (See Note 1)

No Heat Tab

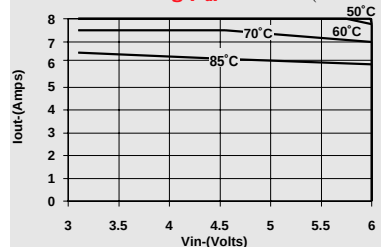
Thermal Derating (T_a)

(See Note 2)



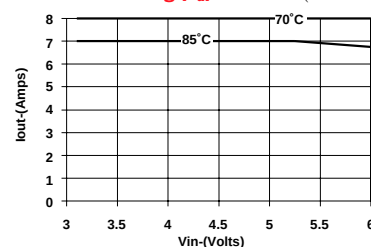
Thermal Derating (T_a)

(See Note 2)



Thermal Derating (T_a)

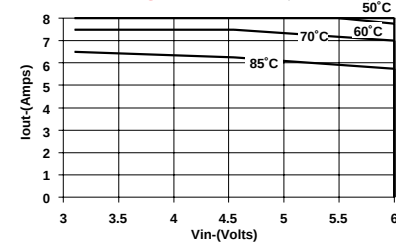
(See Note 2)



Heat Tab

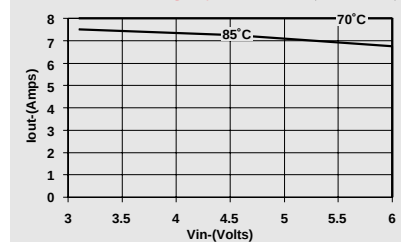
Thermal Derating (T_a)

(See Note 2)



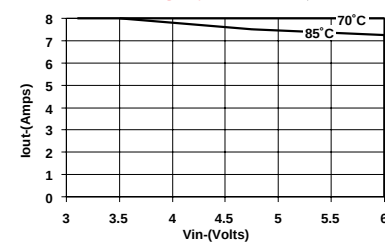
Thermal Derating (T_a)

(See Note 2)



Thermal Derating (T_a)

(See Note 2)

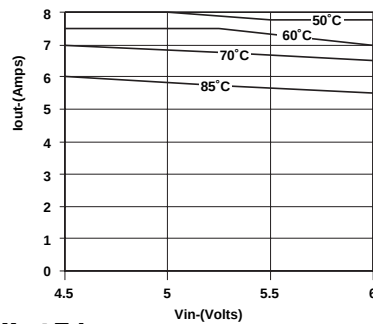


Note 1: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

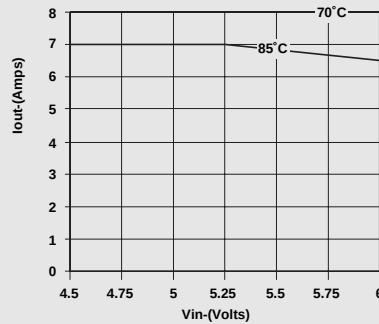
Note 2: Thermal derating graphs are developed in different air flow rates as indicated on each graph, with or without the heat tab, soldered in a printed circuit board. (See Thermal Application Notes.)

PT6500 THERMAL DATA**THERMAL DERATING CURVES****Air Flow (LFM)**
60**200****300****PT6503** (See Note 1)**No Heat Tab****Thermal Derating (T_a)**

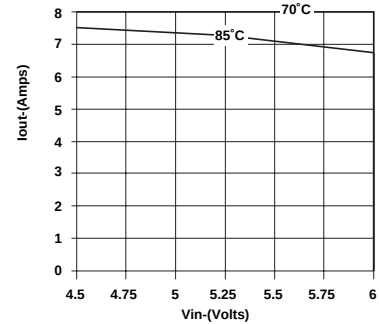
(See Note 2)

**Thermal Derating (T_a)**

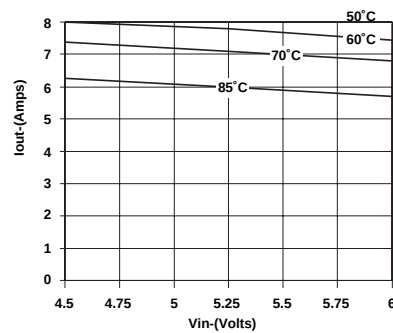
(See Note 2)

**Thermal Derating (T_a)**

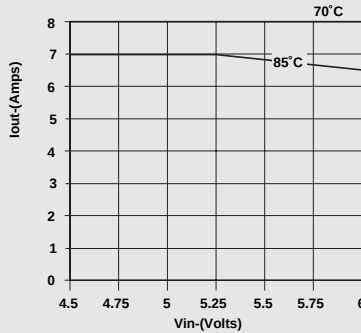
(See Note 2)

**Heat Tab****Thermal Derating (T_a)**

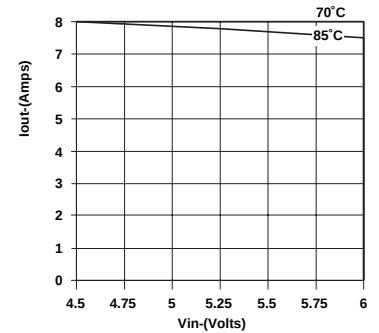
(See Note 2)

**Thermal Derating (T_a)**

(See Note 2)

**Thermal Derating (T_a)**

(See Note 2)

**Note 1:** All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.**Note 2:** Thermal derating graphs are developed in different air flow rates as indicated on each graph, with or without the heat tab, soldered in a printed circuit board. (See Thermal Application Notes.)

Adjusting the Output Voltage of the PT6500 and PT6600 5V Bus Converters

The output voltage of the Power Trends PT6500/PT6600 Series ISRs may be adjusted higher or lower than the factory trimmed pre-set voltage with the addition of a single external resistor. Table 1 accordingly gives the allowable adjustment range for each model in the series as V_a (min) and V_a (max).

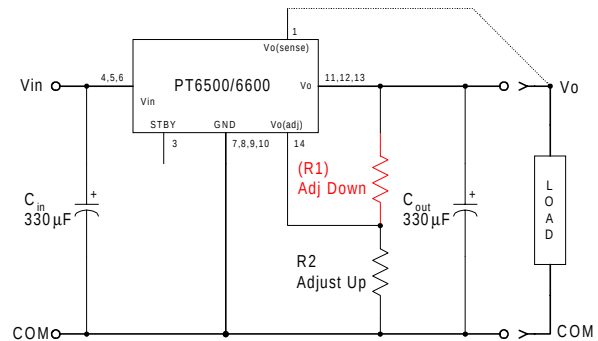
Adjust Up: An increase in the output voltage is obtained by adding a resistor R2, between pin 14 (V_o adjust) and pins 7-10 (GND).

Adjust Down: Add a resistor (R1), between pin 14 (V_o adjust) and pins 11-13 (V_{out}).

Refer to Figure 1 and Table 2 for both the placement and value of the required resistor, either (R1) or R2 as appropriate.

Notes:

1. Use only a single 1% resistor in either the (R1) or R2 location. Place the resistor as close to the ISR as possible.
2. Never connect capacitors from V_o adjust to either GND, V_{out} , or the Remote Sense pin. Any capacitance added to the V_o adjust pin will affect the stability of the ISR.
3. If the Remote Sense feature is being used, connecting the resistor (R1) between pin 14 (V_o adjust) and pin 1 (Remote Sense) can benefit load regulation.
4. The minimum input voltage required by the part is $V_{out} + 1.2$ or $3.1V$, whichever is higher.

Figure 1

The values of (R1) [adjust down], and R2 [adjust up], can also be calculated using the following formulae.

$$(R1) = \frac{R_o (V_a - 1.0)}{(V_o - V_a)} - R_s \text{ k}\Omega$$

$$R2 = \frac{R_o}{V_a - V_o} - R_s \text{ k}\Omega$$

Where: V_o = Original output voltage
 V_a = Adjusted output voltage
 R_o = The resistance value in Table 1
 R_s = The series resistance from Table 1

Table 1**PT6500/6600 ADJUSTMENT AND FORMULA PARAMETERS**

Series Pt #	PT6505	PT6507	PT6502	PT6508	PT6506	PT6503	PT6501	PT6504
	PT6605	PT6607	PT6602	PT6608	PT6606	PT6603	PT6601	PT6604
V_o (nom)	1.2	1.3	1.5	1.7	1.8	2.5	3.3	3.6
V_a (min)	1.14	1.19	1.27	1.36	1.4	1.8	2.25	2.5
V_a (max)	2.35	2.45	2.65	2.85	2.95	3.5	4.2	4.3
R_o (k Ω)	2.49	2.49	2.49	2.49	2.49	4.99	12.1	10.0
R_s (k Ω)	2.0	2.0	2.0	2.0	2.0	4.22	12.1	12.1

PT6500/PT6600 Series**Application****Notes****Table 2****PT6500/PT6600 ADJUSTMENT RESISTOR VALUES**

Series Pt #	PT6505	PT6507	PT6502	PT6508	PT6506	PT6503	PT6501	PT6504
	PT6605	PT6607	PT6602	PT6608	PT6606	PT6603	PT6601	PT6604
V_o (nom)	1.2	1.3	1.5	1.7	1.8	2.5	3.3	3.6
V_a (req'd)								
1.15	(5.5)kΩ							
1.2		(3.0)kΩ						
1.25	47.8kΩ	(10.5)kΩ						
1.3	22.9kΩ		(1.7)kΩ					
1.35	14.6kΩ	47.8kΩ	(3.8)kΩ					
1.4	10.5kΩ	22.9kΩ	(8.0)kΩ	(1.3)kΩ	(0.5)kΩ			
1.45	8.0kΩ	14.6kΩ	(20.4)kΩ	(2.5)kΩ	(1.2)kΩ			
1.5	6.3kΩ	10.5kΩ		(4.2)kΩ	(2.2)kΩ			
1.55	5.1kΩ	8.0kΩ	47.8kΩ	(7.1)kΩ	(3.5)kΩ			
1.6	4.2kΩ	6.3kΩ	22.9kΩ	(12.9)kΩ	(5.5)kΩ			
1.65	3.5kΩ	4.1kΩ	14.6kΩ	(30.4)kΩ	(8.8)kΩ			
1.7	3.0kΩ	4.2kΩ	10.5kΩ		(15.4)kΩ			
1.75	2.5kΩ	3.5kΩ	8.0kΩ	47.8kΩ	(35.4)kΩ			
1.8	2.2kΩ	3.0kΩ	6.3kΩ	22.9kΩ		(1.5)kΩ		
1.85	1.8kΩ	2.5kΩ	5.1kΩ	14.6kΩ	47.8kΩ	(2.3)kΩ		
1.9	1.6kΩ	2.2kΩ	4.2kΩ	10.5kΩ	22.9kΩ	(3.3)kΩ		
1.95	1.3kΩ	1.8kΩ	3.5kΩ	8.0kΩ	14.6kΩ	(4.4)kΩ		
2.0	1.1kΩ	1.6kΩ	3.0kΩ	6.3kΩ	10.5kΩ	(5.8)kΩ		
2.05	0.9kΩ	1.3kΩ	2.5kΩ	5.1kΩ	8.0kΩ	(7.4)kΩ		
2.1	0.8kΩ	1.1kΩ	2.2kΩ	4.2kΩ	6.3kΩ	(9.5)kΩ		
2.15	0.6kΩ	0.9kΩ	1.8kΩ	3.5kΩ	5.1kΩ	(12.2)kΩ		
2.2	0.5kΩ	0.8kΩ	1.6kΩ	3.0kΩ	4.2kΩ	(15.7)kΩ		
2.25	0.4kΩ	0.6kΩ	1.3kΩ	2.5kΩ	3.5kΩ	(20.7)kΩ	(2.3)kΩ	
2.3	0.3kΩ	0.5kΩ	1.1kΩ	2.2kΩ	3.0kΩ	(28.2)kΩ	(3.6)kΩ	
2.35	0.2kΩ	0.4kΩ	0.9kΩ	1.8kΩ	2.5kΩ	(40.7)kΩ	(5.1)kΩ	
2.4		0.3kΩ	0.8kΩ	1.6kΩ	2.2kΩ	(65.6)kΩ	(6.7)kΩ	
2.45		0.2kΩ	0.6kΩ	1.3kΩ	1.8kΩ	(140.0)kΩ	(8.5)kΩ	
2.5			0.5kΩ	1.1kΩ	1.6kΩ		(10.6)kΩ	(1.5)kΩ
2.55			0.4kΩ	0.9kΩ	1.3kΩ	95.6kΩ	(12.9)kΩ	(2.7)kΩ
2.6			0.3kΩ	0.8kΩ	1.1kΩ	45.7kΩ	(15.6)kΩ	(3.9)kΩ
2.65			0.2kΩ	0.6kΩ	0.9kΩ	29.0kΩ	(18.6)kΩ	(5.3)kΩ
2.7				0.5kΩ	0.8kΩ	20.7kΩ	(22.2)kΩ	(6.8)kΩ
2.75				0.4kΩ	0.6kΩ	15.7kΩ	(26.4)kΩ	(8.5)kΩ
2.8				0.3kΩ	0.5kΩ	12.4kΩ	(31.5)kΩ	(10.4)kΩ
2.85				0.2kΩ	0.4kΩ	10.0kΩ	(37.6)kΩ	(12.6)kΩ
2.9					0.3kΩ	8.3kΩ	(45.4)kΩ	(15.0)kΩ
2.95					0.2kΩ	0.9kΩ	(55.3)kΩ	(17.9)kΩ
3.0						5.8kΩ	(68.6)kΩ	(21.2)kΩ
3.1						4.1kΩ	(115.0)kΩ	(29.9)kΩ
3.2						2.9kΩ	(254.0)kΩ	(42.9)kΩ
3.3						2.0kΩ		(64.6)kΩ
3.4						1.3kΩ	109.0kΩ	(108.0)kΩ
3.5						0.8kΩ	48.4kΩ	(238.0)kΩ
3.6							28.2kΩ	
3.7							18.2kΩ	87.9kΩ
3.8							12.1kΩ	37.9kΩ
3.9	4/. V _{out} >3.8Vdc requires V _{in} >5.0Vdc !						8.1kΩ	21.2kΩ
4.0							5.2kΩ	12.9kΩ
4.1							3.0kΩ	7.9kΩ
4.2							1.3kΩ	4.6kΩ
4.3								2.2kΩ

R1 = (Red) R2 = Black

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.