

## 2.3W DUAL AUDIO POWER AMPLIFIER

The KA2206 is a monolithic integrated circuit consisting of a 2-channel power amplifier. It is suitable for stereo and bridge amplifier application of radio cassette tape recorders.


## FEATURES

- High output power  
Stereo :  $P_o=2.3W$  (Typ) at  $V_{cc}=9V$ ,  $R_L=4\Omega$ .  
Bridge :  $P_o=4.7W$  (Typ) at  $V_{cc}=9V$ ,  $R_L=8\Omega$ .
- Low switching distortion at high frequency.
- Small shock noise at the time of power on/off due to a built-in muting circuit.
- Good ripple rejection due to built-in ripple filter.
- Good channel separation.
- Soft tone at the time of output saturation.
- Closed loop voltage gain fixed 45dB (Bridge : 51dB) but availability with external resistor added.
- Minimum number of external parts required.
- Easy to design radiator fin.


## ORDERING INFORMATION

Device	Package	Operating Temperature
KA2206	16DIP	-20 ~ +70 °C

16 DIP



## BLOCK DIAGRAM

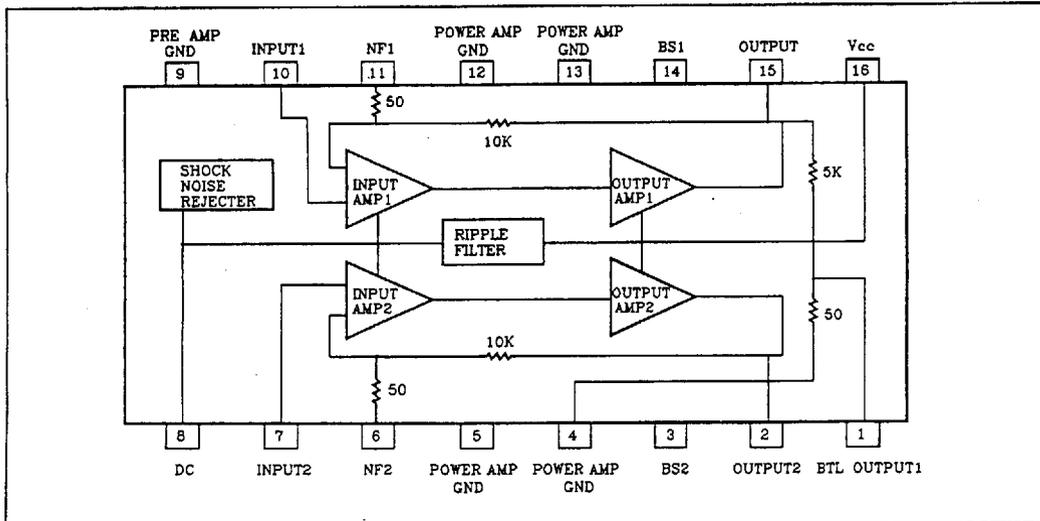

**ABSOLUTE MAXIMUM RATINGS(Ta=25℃)**

Characteristics	Symbol	Value	Unit
Supply Voltage	Vcc	15	V
Power Dissipation	Pd	4*	W
Operating Temperature	Topr	-20 ~ +70	℃
Storage Temperature	Tstg	-40 ~ +150	℃

\*Fin is soldering on the PCB

**ELECTRICAL CHARACTERISTICS (Ta=25℃, Vcc=9V, f=1KHz, Rg=600Ω, unless otherwise specified)**

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit	
Operating Supply Voltage	Vcc			9	11	V	
Quiescent Circuit Current	Icc	Vi=0, Stereo		40	55	mA	
Closed Loop Voltage Gain	Av	Stereo	Vi=-45dBm	43	45	47	dB
		Bridge		49	51	53	
Channel Balance	CB	Stereo	-1	0	+1	dB	
Output Power	Po	Stereo	R <sub>L</sub> =4Ω, THD=10%	1.7	2.3		W
			R <sub>L</sub> =8Ω, THD=10%		1.3		W
		Bridge	R <sub>L</sub> =8Ω, THD=10%		4.7		W
Total Harmonic Distortion	THD	Stereo	Po=250mW, R <sub>L</sub> =4Ω		0.3	1.5	%
		Bridge			0.5		%
Input Resistance	Ri		21	30		KΩ	
Ripple Rejection	RR	Stereo, Rg=0Ω, Vr=150mV f=100Hz	40	46		dB	
Output Noise Voltage	V <sub>NO</sub>	Stereo, Rg=0Ω		0.3	1.0	mV	
		Stereo, Rg=10KΩ		0.5	2.0	mV	
Cross Talk	CT	Stereo, Rg=10KΩ, Vo=0dBm	40	55		dB	

**TYPICAL APPLICATION CIRCUIT: Stereo Amplifier**

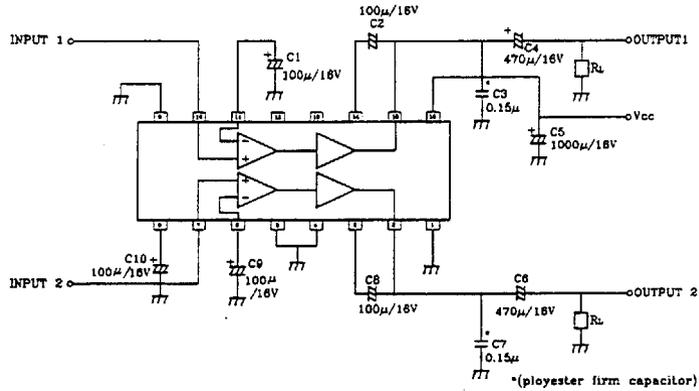


Fig.2

**TYPICAL APPLICATION CIRCUIT: Bridge Amplifier**


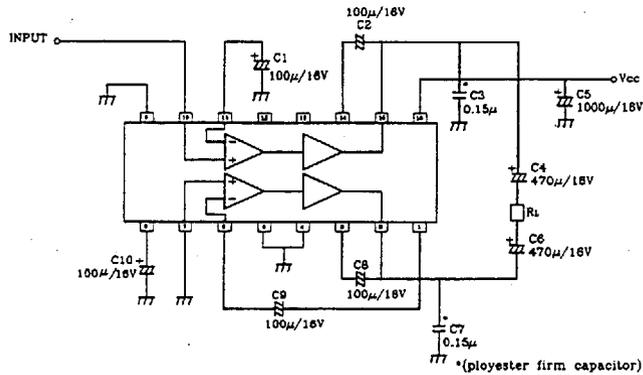


Fig.3

## VOLTAGE GAIN ADJUSTMENT

### 1. Stereo application

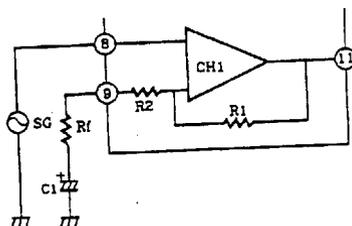


I ) Fixed voltage gain  
(Pin 9 connected to GND directly)

$$A_v = 20 \log \frac{R_1}{R_2} \text{ (dB)}$$

II ) Variable voltage gain  
(Rf and C1 connected with pin 9)

$$A_v = 20 \log \frac{R_1}{R_2 + R_f} \text{ (dB)}$$

### 2. Bridge application

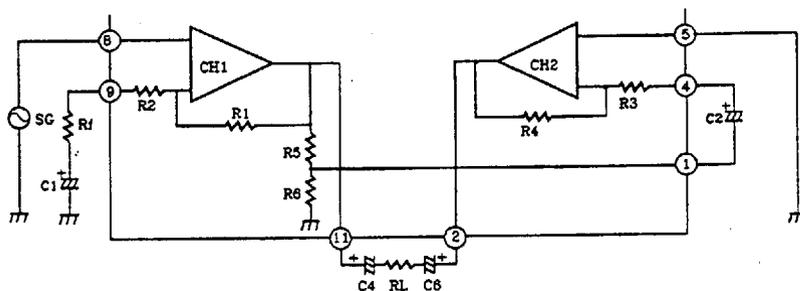


I ) Fixed voltage gain (Pin 9 connected to GND directly)

$$A_v = 20 \log \frac{R_1}{R_2} + 6 \text{ (dB)}$$


II ) Variable voltage gain (Rf and C1 connected with pin 9)

$$A_v = 20 \log \frac{R_1}{R_2 + R_f} + 6 \text{ (dB)}$$


**OUTPUT POWER-INPUT VOLTAGE**

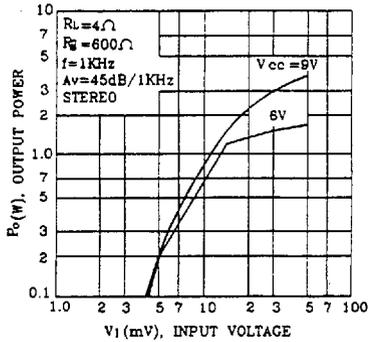


**FREQUENCY RESPONSE**

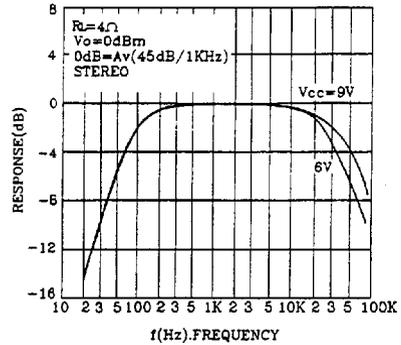


**VOLTAGE GAIN-FREQUENCY**

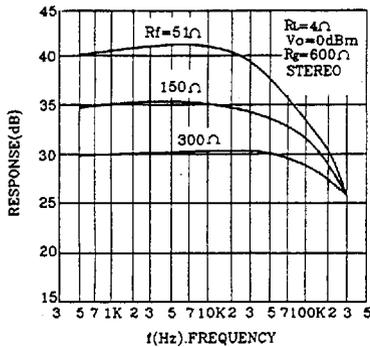


**TOTAL HARMONIC DISTORTION-OUTPUT POWER**

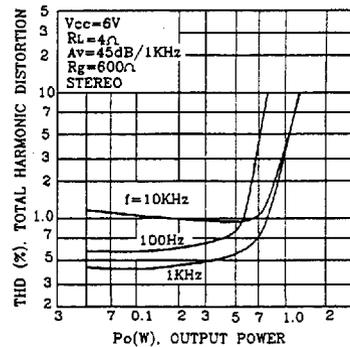


**TOTAL HARMONIC DISTORTION-OUTPUT POWER**

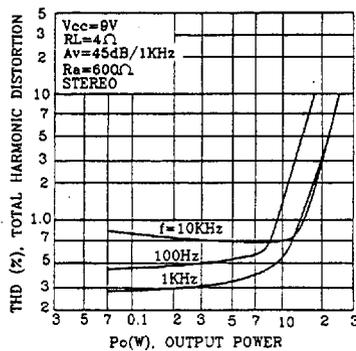


**TOTAL HARMONIC DISTORTION-FREQUENCY**

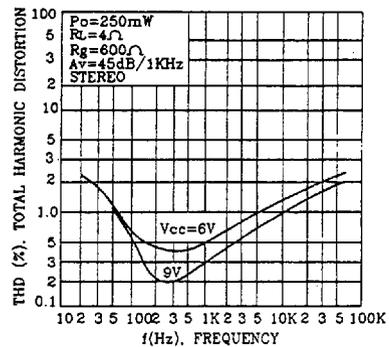


### TOTAL HARMONIC DISTORTION-FREQUENCY

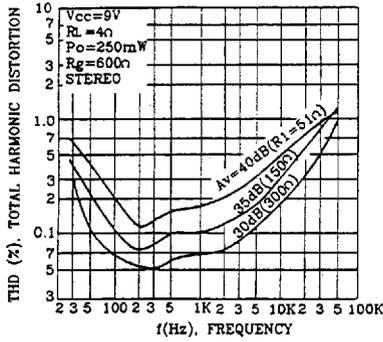


### CHANNEL SEPARATION-FREQUENCY

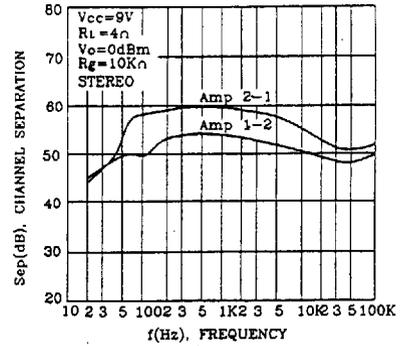


### OUTPUT RIPPLE VOLTAGE OUTPUT NOISE VOLTAGE GENERATOR RESISTANCE

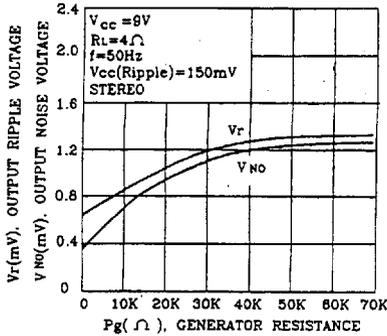


### POWER DISSIPATION-OUTPUT POWER

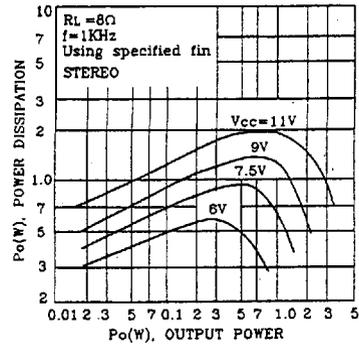


### POWER DISSIPATION-OUTPUT POWER

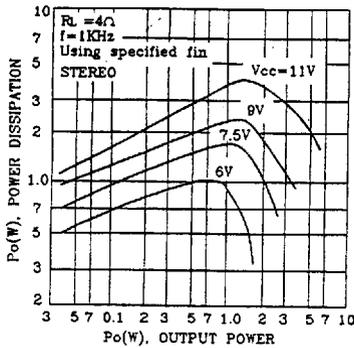


### OUTPUT POWER-SUPPLY VOLTAGE

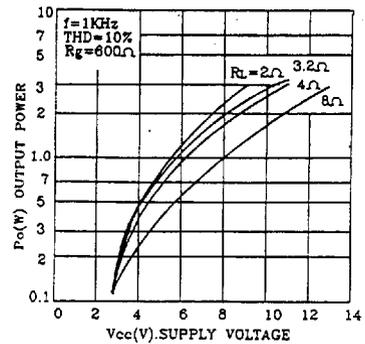


### QUIESCENT CIRCUIT CURRENT SUPPLY VOLTAGE

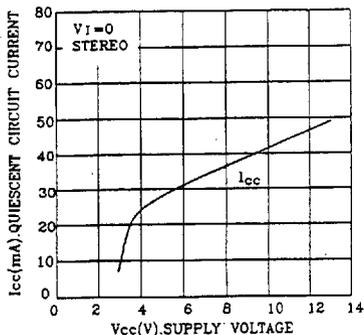


### QUIESCENT CIRCUIT CURRENT-AMBIENT TEMPERATURE

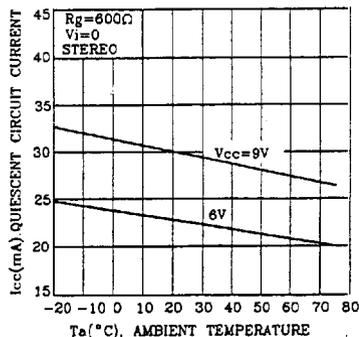


### OUTPUT POWER-INPUT VOLTAGE

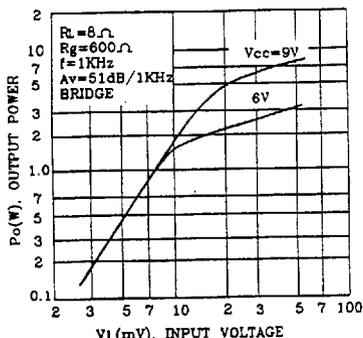


### FREQUENCY RESPONSE

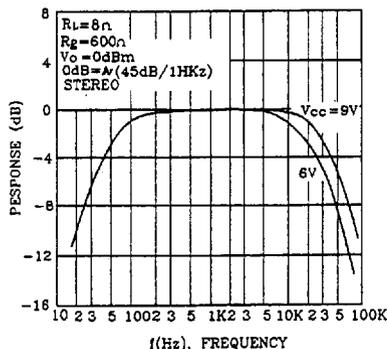


### TOTAL HARMONIC DISTORTION-OUTPUT POWER

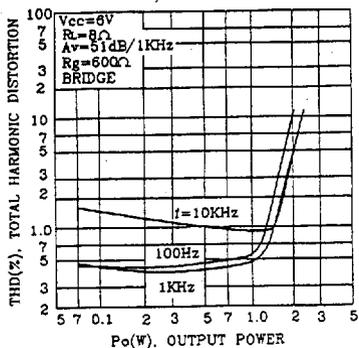


### TOTAL HARMONIC DISTORTION-OUTPUT POWER

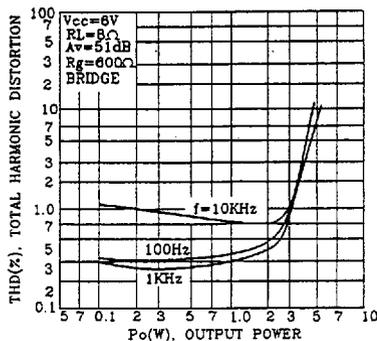

## TOTAL HARMONIC DISTORTION-FREQUENCY

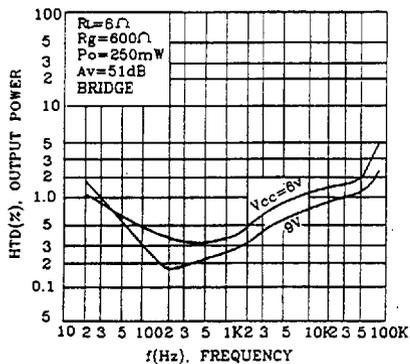

## POWER DISSIPATION-OUTPUT POWER

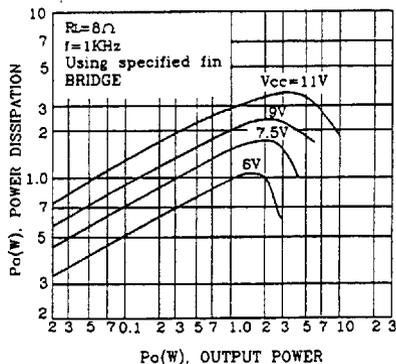

## OUTPUT POWER-SUPPLY VOLTAGE

