

0.1 Hz to 102.4 kHz
8-Bit Programmable

2" x 4"
4-Pole Filters

Description

The 854 Series are digitally programmable low-pass and high-pass active filters that are tunable over a 256:1 frequency range. 854 filters are available with any one of six standard factory-set tuning ranges up to 102.4 kHz. These units contain 8 CMOS logic inputs that can be operated in a transparent or latching mode.

All 854 Series models are convenient, low profile, easy to use fully finished filters which require no external components or adjustments. They feature low harmonic distortion, and near theoretical phase and amplitude characteristics. 854 filters operate from non-critical ± 12 to ± 18 Vdc power supplies, have a 10 k Ω (min.) input impedance, a 10 Ω (max.) output impedance and offer dc voltage offset adjustment.

Features/Benefits:

- Digitally programmable corner frequency allows selecting cut-off frequencies specific to each application.
- Plug-in ready-to-use, reducing engineering design and manufacturing cycle time.
- Factory-set tuning range, no external clocks or adjustments needed.
- Broad range of transfer characteristics and corner frequencies to meet a wide range of applications.
- Low profile design, ideal for rack mount installations.

Applications

- Anti-alias filtering
- Data acquisition systems
- Communication systems and electronics
- Medical electronics equipment and research
- Aerospace, navigation and sonar applications
- Sound and vibration testing
- Real and compressed time data analysis
- Noise elimination
- Signal reconstruction



Programmable Specifications	Page
Digital Tuning & Control	2

Available Low-Pass Models:

854L4B	4-pole Butterworth	3
854L4L	4-pole Bessel	3
854L8Y2	4-pole Cheby (0.2 dB Ripple)	3
854L8Y5	4-pole Cheby (0.5 dB Ripple)	3

Available High-Pass Models:

854H8B	4-pole Butterworth	4
854H8Y2	4-pole Cheby (0.2 dB Ripple)	4
854H8Y5	4-pole Cheby (0.5 dB Ripple)	4

General Specifications:

Ordering information	5
Pin-out/package data.	5

8-Bit Programmable Filters

Digital Tuning & Control Characteristics

Digital Tuning Characteristics

The digital tuning interface circuits are two 4042 quad CMOS latches which accept the following CMOS-compatible inputs: eight tuning bits ($D_0 - D_7$), a latch strobe bit (C), and a transition polarity bit (P).

Filter tuning follows the tuning equation given below:

$$f_c = (f_{\max}/256) [1 + D_7 \times 2^7 + D_6 \times 2^6 + D_5 \times 2^5 + D_4 \times 2^4 + D_3 \times 2^3 + D_2 \times 2^2 + D_1 \times 2^1 + D_0 \times 2^0]$$

where $D_1 - D_7 = "0"$ or $"1"$, and

$f_{\max}$ = Maximum tuning frequency;

f_c = corner frequency;

Minimum tunable frequency = $f_{\max}/256$ (D_0 thru $D_7 = 0$);

Minimum frequency step (Resolution) = $f_{\max}/256$

Data Control Specifications

Data Control Lines

Functions	Latch Strobe (C) Transition Polarity (P)
-----------	---

Data Control Modes

Mode 1	P = 0; C = 0 frequency follows input codes P = 0; C = 0↑ frequency latched on rising edge
Mode 2	P = 1; C = 1 frequency follows input codes P = 1; C = 1↓ frequency latched on falling edge

Input Data Levels (CMOS Logic)

Input Voltage ($V_s = 15$ Vdc)

Low Level In	0 Vdc min.	4 Vdc max.
High Level In	11 Vdc min.	15 Vdc max.

Input Current

High Level In	-10 ⁻⁵ μ A typ.	-1 μ A max..
Low Level In	+10 ⁻⁵ μ A typ.	+1 μ A max.

Input Capacitance

5 pF typ	7.5 pF max.
----------	-------------

Latch Response

Data Set Up Time ¹	25 nS
Data Hold Time ²	50 nS
Strobe Pulse Width	80 nS min.

Input Data Format

Frequency Select Bits

Positive Logic

Logic "1" = +Vs
Logic "0" = Gnd

Bit Weighting

(Binary-Coded)

D_0 LSB (least significant bit)

D_7 MSB (most significant bit)


Frequency Range

256 : 1, Binary Weighted

Pin-Out Key

IN	Analog Input Signal	D_7 Tuning Bit 7 (MSB)
OUT	Analog Output Signal	D_6 Tuning Bit 6
GND	Power and Signal Return	D_5 Tuning Bit 5
"P"	Transition Polarity Bit	D_4 Tuning Bit 4
"C"	Tuning Strobe Bit	D_3 Tuning Bit 3
+Vs	Supply Voltage, Positive	D_2 Tuning Bit 2
-Vs	Supply Voltage, Negative	D_1 Tuning Bit 1
Os	Optional Offset Adjustment	D_0 Tuning Bit 0 (LSB)

OUT +Vs -Vs

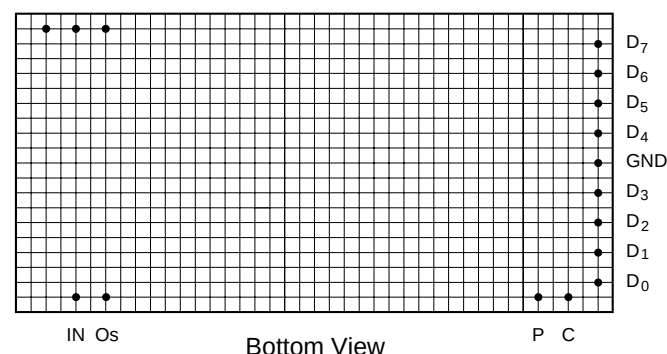

Bottom View

MSB	---	---	---	---	---	---	LSB	Bit Weight
2 ⁷	2 ⁶	2 ⁵	2 ⁴	2 ³	2 ²	2 ¹	2 ⁰	f_c Corner Frequency
D_7	D_6	D_5	D_4	D_3	D_2	D_1	D_0	
0	0	0	0	0	0	0	0	$f_{\max}/256$
0	0	0	0	0	0	0	1	$f_{\max}/128$
0	0	0	0	0	0	1	1	$f_{\max}/64$
0	0	0	0	0	1	1	1	$f_{\max}/32$
0	0	0	0	1	1	1	1	$f_{\max}/16$
0	0	0	1	1	1	1	1	$f_{\max}/8$
0	0	1	1	1	1	1	1	$f_{\max}/4$
0	1	1	1	1	1	1	1	$f_{\max}/2$
1	1	1	1	1	1	1	1	$f_{\max}$

Notes:

- Frequency data must be present before occurrence of strobe edge.
- Frequency data must be present after occurrence of strobe edge.



8-Bit Programmable

4-Pole Low-Pass Filters

Model	854L8B	854L8L	854L8Y2	854L8Y5
Product Specifications				
Transfer Function	4-Pole, Butterworth	4-Pole, Bessel	4-Pole, Chebychev, 0.2 dB Ripple	4-Pole, Chebychev, 0.5 dB Ripple
Size, Model 1 & 2 Model 3 thru 6	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"
Range f_c	0.1 Hz to 102.4 kHz	0.1 Hz to 102.4 kHz	0.1 Hz to 102.4 kHz	0.1 Hz to 102.4 kHz
Theoretical Transfer Characteristics	Appendix A Page 7	Appendix A Page 2	Appendix A Page 12	Appendix A Page 15
Passband Ripple (theoretical)	0.0 dB	0.0 dB	0.20 dB	0.05 dB
DC Voltage Gain (non-inverting)	0 $\pm$ 0.1 dB max. 0 $\pm$ 0.05 dB typ.	0 $\pm$ 0.1 dB max. 0 $\pm$ 0.05 dB typ.	0 $\pm$ 0.1 dB max. 0 $\pm$ 0.05 dB typ.	0 $\pm$ 0.1 dB max. 0 $\pm$ 0.05 dB typ.
Stopband Attenuation Rate	24 dB/octave	24 dB/octave	24 dB/octave	24 dB/octave
Cutoff Frequency Stability Amplitude Phase	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB -180°	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB -121°	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB -231°	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB -245°
Filter Attenuation (theoretical)	0.67 dB 0.80 f_c 3.01 dB 1.00 f_c 30.0 dB 2.37 f_c 40.0 dB 3.16 f_c	1.86 dB 0.80 f_c 3.01 dB 1.00 f_c 30.0 dB 3.50 f_c 40.0 dB 4.72 f_c	-0.20 dB 0.80 f_c 3.01 dB 1.00 f_c 30.0 dB 1.89 f_c 40.0 dB 2.46 f_c	-0.43 dB 0.80 f_c 3.01 dB 1.00 f_c 30.0 dB 1.80 f_c 40.0 dB 2.33 f_c
Phase Match¹	0 - 0.8 f_c $\pm$ 2° max. $\pm$ 1° typ. 0.8 f_c - 1.0 f_c $\pm$ 3° max. $\pm$ 1.5° typ.	0 - f_c $\pm$ 2° max. $\pm$ 1° typ.	0 - 0.8 f_c $\pm$ 2° max. $\pm$ 1° typ. 0.8 f_c - 1.0 f_c $\pm$ 3° max. $\pm$ 1.5° typ.	0 - 0.8 f_c $\pm$ 2° max. $\pm$ 1° typ. 0.8 f_c - 1.0 f_c $\pm$ 3° max. $\pm$ 1.5° typ.
Amplitude Accuracy (theoretical)	0 - 0.8 f_c $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ. 0.8 f_c - 1.0 f_c $\pm$ 0.3 dB max. $\pm$ 0.15 dB typ.	0 - f_c $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ.	0 - 0.8 f_c $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ. 0.8 f_c - 1.0 f_c $\pm$ 0.3 dB max. $\pm$ 0.15 dB typ.	0 - 0.8 f_c $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ. 0.8 f_c - 1.0 f_c $\pm$ 0.3 dB max. $\pm$ 0.15 dB typ.
Total Harmonic Distortion @ 1 kHz	< - 100 dB typ.	< - 100 dB typ.	< - 88 dB typ.	< - 88 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	200 μ Vrms typ.	200 μ Vrms typ.	200 μ Vrms typ.	200 μ Vrms typ.
Narrow Band Noise (5 Hz - 100 kHz)	50 μ Vrms typ.	50 μ Vrms typ.	50 μ Vrms typ.	50 μ Vrms typ.
Filter Mounting Assembly	FMA-03A	FMA-03A	FMA-03A	FMA-03A

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.


8-Bit Programmable
**4-Pole
High-Pass Filters**

Model	854H8B	854H8Y2	854H8Y5	
Product Specifications				
Transfer Function	4-Pole, Butterworth	4-Pole, Chebychev, 0.2 dB Ripple	4-Pole, Chebychev, 0.5 dB Ripple	
Size, Model 1 & 2 Model 3 thru 6	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"	4.0" x 2.0" x 0.6" 4.0" x 2.0" x 0.4"	
Range f_c	0.1 Hz to 102.4 kHz	0.1 Hz to 102.4 kHz	0.1 Hz to 102.4 kHz	
Theoretical Transfer Characteristics	Appendix A Page 27	Appendix A Page 31	Appendix A Page 33	
Passband Ripple (theoretical)	0.0 dB	0.20 dB	0.50 dB	
Voltage Gain (non-inverting)	0 $\pm$ 0.2 dB to 100 kHz 0 $\pm$ 0.5 dB to 120 kHz	0 $\pm$ 0.2 dB to 100 kHz 0 $\pm$ 0.5 dB to 120 kHz	0 $\pm$ 0.2 dB to 100 kHz 0 $\pm$ 0.5 dB to 120 kHz	
Power Bandwidth	120 kHz	120 kHz	120 kHz	
Small Signal Bandwidth	(-6 dB) 1 MHz	(-6 dB) 1 MHz	(-6 dB) 1 MHz	
Stopband Attenuation Rate	24 dB/octave	24 dB/octave	24 dB/octave	
Cutoff Frequency Stability Amplitude Phase	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB 180°	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB 231°	f_c $\pm$ 2% max. $\pm$ 0.01% /°C -3 dB 245°	
Filter Attenuation (theoretical)	40 dB 0.31 f_c 30 dB 0.42 f_c 3.01 dB 1.00 f_c 0.02 dB 2.00 f_c	40.0 dB 0.41 f_c 30.0 dB 0.53 f_c 3.01 dB 1.00 f_c -0.07 dB 2.00 f_c	40.0 dB 0.43 f_c 30.0 dB 0.56 f_c 3.01 dB 1.00 f_c -0.25 dB 2.00 f_c	
Phase Match¹	f_c - 100 kHz $\pm$ 3° max. $\pm$ 1.5° typ.	f_c - 100 kHz $\pm$ 3° max. $\pm$ 1.5° typ.	f_c - 100 kHz $\pm$ 3° max. $\pm$ 1.5° typ.	
Amplitude Accuracy (theoretical)	1.00 - 1.25 f_c $\pm$ 0.3 dB max. $\pm$ 0.15 dB typ. 1.25 f_c -100 kHz $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ.	1.00 - 1.25 f_c $\pm$ 0.3 dB max. $\pm$ 0.15 dB typ. 1.25 f_c -100 kHz $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ.	1.00 - 1.25 f_c $\pm$ 0.3 dB max. $\pm$ 0.15 dB typ. 1.25 f_c -100 kHz $\pm$ 0.2 dB max. $\pm$ 0.1 dB typ.	
Total Harmonic Distortion @ 1 kHz	< - 100 dB typ.	< - 88 dB typ.	< - 88 dB typ.	
Wide Band Noise	400 μ Vrms typ.	400 μ Vrms typ.	400 μ Vrms typ.	
Narrow Band Noise (5 Hz - 100 kHz)	100 μ Vrms typ.	100 μ Vrms typ.	100 μ Vrms typ.	
Filter Mounting Assembly	FMA-03A	FMA-03A	FMA-03A	

1. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

Specification

(25°C and Vs ± 15 Vdc)

Analog Input Characteristics¹

Impedance	10 k Ω min.
Voltage Range	± 10 Vpeak
Max. Safe Voltage	$\pm V_s$

Analog Output Characteristics

Impedance (Closed Loop)	1 Ω typ. 10 Ω max.
Linear Operating Range	± 10 V
Maximum Current ²	± 2 mA
Offset Voltage ³	2 mV typ. 20 mV max.
Offset Temp. Coeff.	50 μ V/°C

Power Supply ($\pm V$)

Rated Voltage	± 15 Vdc
Operating Range	± 12 to ± 18 Vdc
Maximum Safe Voltage	± 18 Vdc
Quiescent Current	
4-Pole	± 13 mA typ. ± 20 mA max.


Temperature

Operating	0 to +70°C
Storage	-25 to +85°C

Notes:

1. Input and output signal voltage referenced to supply common.
2. Output is short circuit protected to common.
3. DO NOT CONNECT TO $\pm V_s$.
4. Adjustable to zero.
5. Units operate with or without offset pin connected.



DC Offset Adjustment

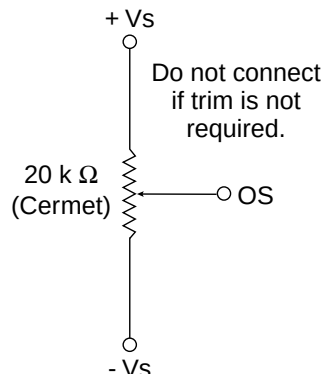

Pin-Out and Package Data

Ordering Information

Pin-Out & Package Data

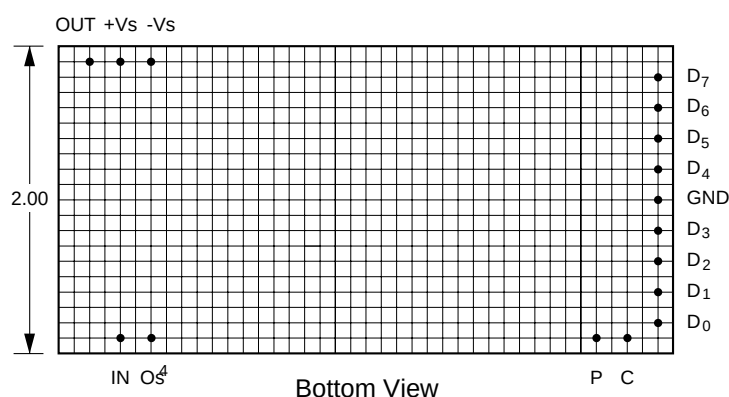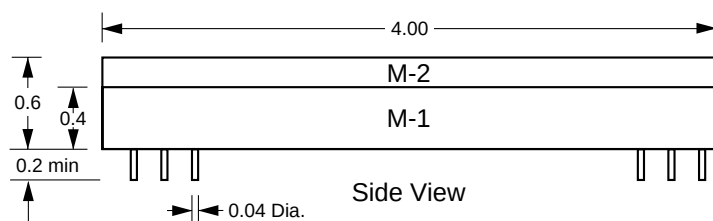

Filter Mounting Assembly-See FMA-03A

Ordering Information

Filter Type

L - Low Pass
H - High Pass

Transfer Function

B - Butterworth
L - Bessel
Y2 - Chebychev (0.2 dB Ripple)
Y5 - Chebychev (0.2 dB Ripple)

854L8B-3

Model Number

e.g., Model Number	Tuning Range (Hz)	Minimum Step(Hz)	Case
1	0.1 to 25.6	0.1	M-2
2	1.0 to 256	1.0	M-2
3	10 to 2560	10	M-1
4	100 to 25.6k	100	M-1
5	200 to 51.2k	200	M-1
6	400 to 102.4k	400	M-1



Appendix A

Low-Pass

4-Pole Bessel

Theoretical Transfer Characteristics


f/f _c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.336
0.10	-0.028	-12.1	.336
0.20	-0.111	-24.2	.336
0.30	-0.251	-36.3	.336
0.40	-0.448	-48.4	.336
0.50	-0.705	-60.6	.336
0.60	-1.02	-72.7	.336
0.70	-1.41	-84.8	.336
0.80	-1.86	-96.8	.335
0.85	-2.11	-103	.334
0.90	-2.40	-109	.333
0.95	-2.69	-115	.332
1.00	-3.01	-121	.330
1.10	-3.71	-133	.325
1.20	-4.51	-144	.318
1.30	-5.39	-156	.308
1.40	-6.37	-166	.295
1.50	-7.42	-177	.280
1.60	-8.54	-187	.263
1.70	-9.71	-195	.246
1.80	-10.9	-204	.228
1.90	-12.2	-212	.211
2.00	-13.4	-219	.194
2.25	-16.5	-235	.158
2.50	-19.5	-248	.129
2.75	-22.4	-259	.107
3.00	-25.1	-267	.089
3.25	-27.6	-275	.076
3.50	-30.0	-281	.065
4.00	-34.4	-291	.049
5.00	-41.9	-305	.031
6.00	-48.1	-315	.021
7.00	-53.4	-321	.016
8.00	-58.0	-326	.012
9.00	-62.0	-330	.009
10.0	-65.7	-333	.008

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

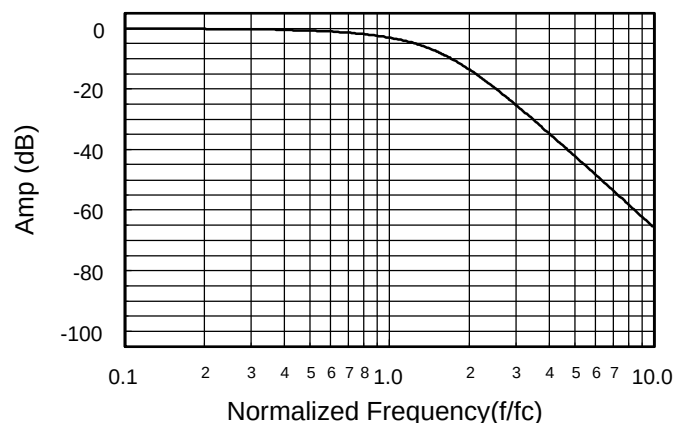

Delay (Normalized)

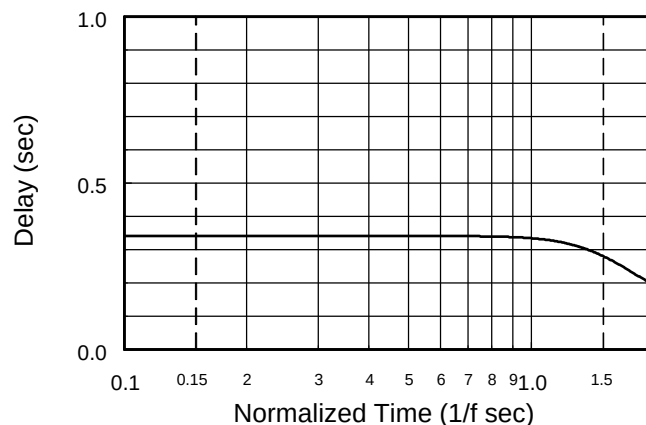

Step Response

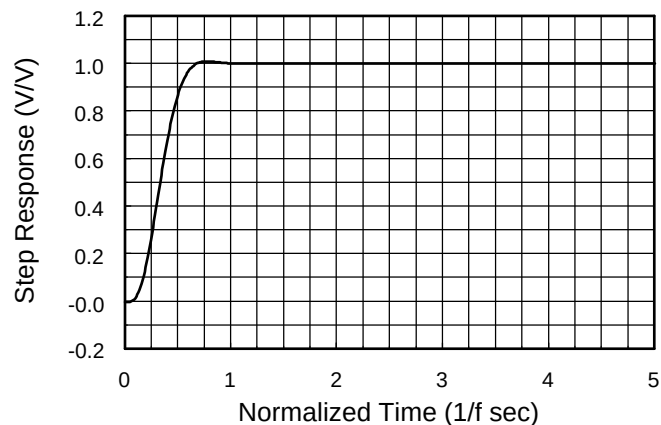



Theoretical Transfer Characteristics


f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.00	0.00	0.00	.416
0.10	0.00	-15.0	.418
0.20	0.00	-30.1	.423
0.30	-0.00	-45.5	.433
0.40	-0.003	-61.4	.449
0.50	-0.017	-78.0	.474
0.60	-0.072	-95.7	.511
0.70	-0.243	-115	.558
0.80	-0.674	-136	.604
0.85	-1.047	-147	.619
0.90	-1.555	-158	.622
0.95	-2.21	-169	.612
1.00	-3.01	-180	.588
1.10	-4.97	-200	.513
1.20	-7.24	-217	.427
1.30	-9.62	-231	.350
1.40	-12.0	-242	.289
1.50	-14.3	-252	.241
1.60	-16.4	-260	.204
1.70	-18.5	-266	.175
1.80	-20.5	-272	.152
1.90	-22.3	-277	.134
2.00	-24.1	-282	.119
2.25	-28.2	-291	.091
2.50	-31.8	-299	.072
2.75	-35.1	-304	.059
3.00	-38.2	-309	.049
3.25	-41.0	-313	.041
3.50	-43.5	-317	.035
4.00	-48.2	-322	.027
5.00	-55.9	-330	.017
6.00	-62.3	-335	.012
7.00	-67.6	-339	.009
8.00	-72.2	-341	.007
9.00	-76.3	-343	.005
10.0	-80.0	-345	.004

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

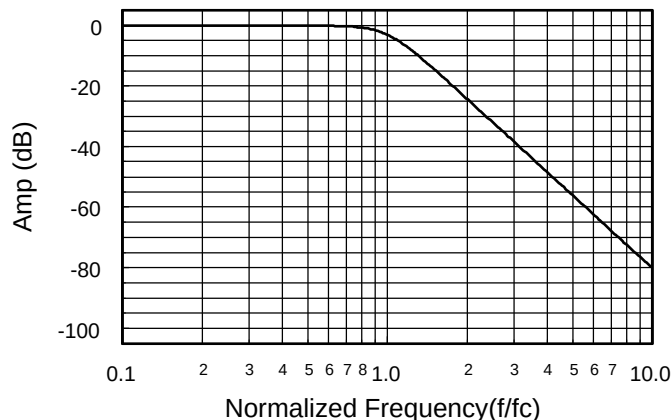

Delay (Normalized)

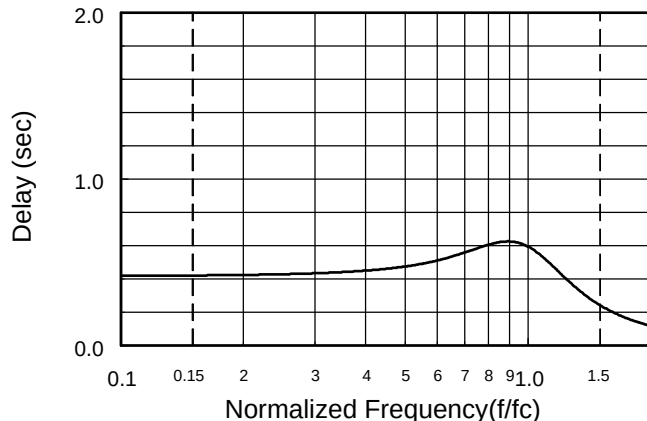

Step Response

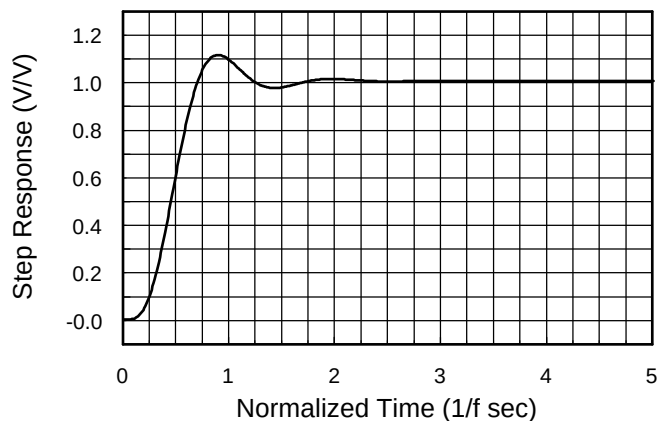



Appendix A

Low-Pass

4-Pole, 0.2 dB Ripple Chebychev

Theoretical Transfer Characteristics


f/f _c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.000	0.00	.478
0.10	0.039	-17.3	.487
0.20	0.129	-35.2	.509
0.30	0.195	-54.0	.533
0.40	0.174	-73.4	.547
0.50	0.074	-93.2	.553
0.60	0.000	-113	.575
0.70	0.074	-135	.654
0.80	0.199	-162	.836
0.85	0.063	-178	.947
0.90	-0.443	-196	1.02
0.95	-1.47	-214	.989
1.00	-3.01	-231	.873
1.10	-6.89	-257	.583
1.20	-10.8	-274	.385
1.30	-14.5	-286	.271
1.40	-17.7	-294	.202
1.50	-20.7	-300	.158
1.60	-23.4	-306	.128
1.70	-25.8	-310	.107
1.80	-28.1	-313	.090
1.90	-30.2	-316	.078
2.00	-32.2	-319	.068
2.25	-36.7	-324	.051
2.50	-40.6	-328	.039
2.75	-44.1	-331	.032
3.00	-47.3	-334	.026
3.25	-50.2	-336	.022
3.50	-52.8	-338	.018
4.00	-57.6	-341	.014
5.00	-65.5	-345	.009
6.00	-71.9	-347	.006
7.00	-77.3	-349	.004
8.00	-82.0	-351	.003
9.00	-86.1	-352	.003
10.0	-89.8	-352	.002

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

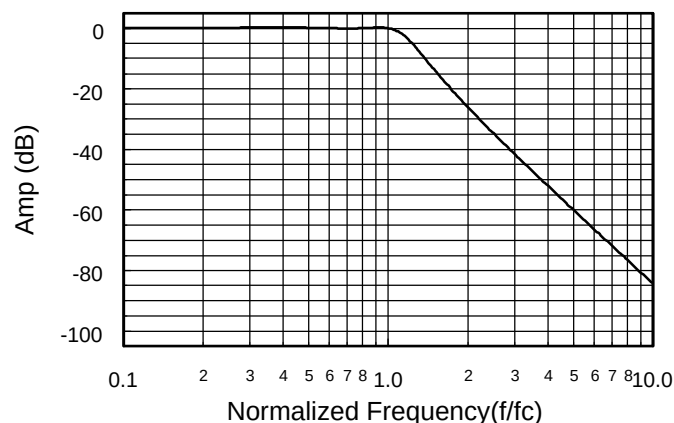

Delay (Normalized)

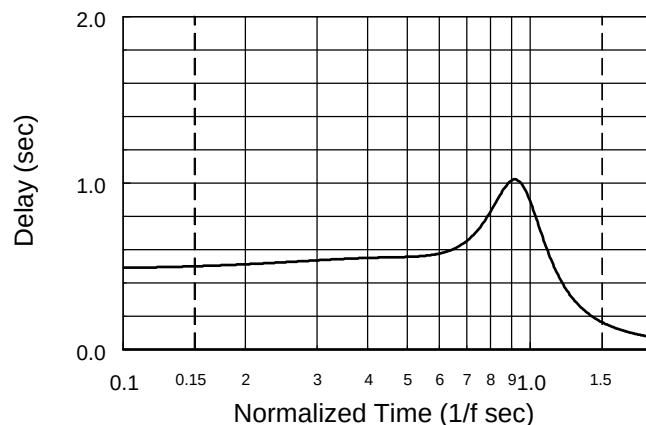

Step Response

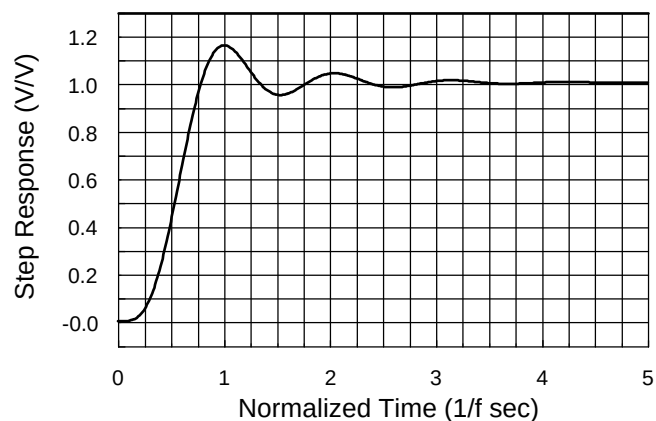



Appendix A

Low-Pass

4-Pole, 0.5 dB Ripple Chebychev

Theoretical Transfer Characteristics


f/f _c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.476
0.10	0.087	-17.3	.492
0.20	0.295	-35.7	.533
0.30	0.474	-55.7	.577
0.40	0.463	-76.9	.596
0.50	0.248	-98.2	.583
0.60	0.025	-119	.578
0.70	0.072	-141	.647
0.80	0.432	-168	.881
0.85	0.482	-185	1.06
0.90	0.062	-205	1.18
0.95	-1.12	-226	1.13
1.00	-3.01	-245	.946
1.10	-7.61	-272	.559
1.20	-12.0	-288	.345
1.30	-15.9	-298	.235
1.40	-19.3	-305	.173
1.50	-22.4	-311	.134
1.60	-25.1	-315	.108
1.70	-27.6	-318	.089
1.80	-29.9	-321	.075
1.90	-32.1	-324	.065
2.00	-34.1	-326	.057
2.25	-38.6	-301	.042
2.50	-42.6	-334	.033
2.75	-46.1	-336	.026
3.00	-49.3	-339	.021
3.25	-52.2	-340	.018
3.50	-54.9	-342	.015
4.00	-59.7	-344	.011
5.00	-67.6	-347	.007
6.00	-74.0	-350	.005
7.00	-79.4	-351	.004
8.00	-84.1	-352	.003
9.00	-88.2	-353	.002
10.0	-91.9	-354	.002

1. Normalized Group Delay:


The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$


Frequency Response

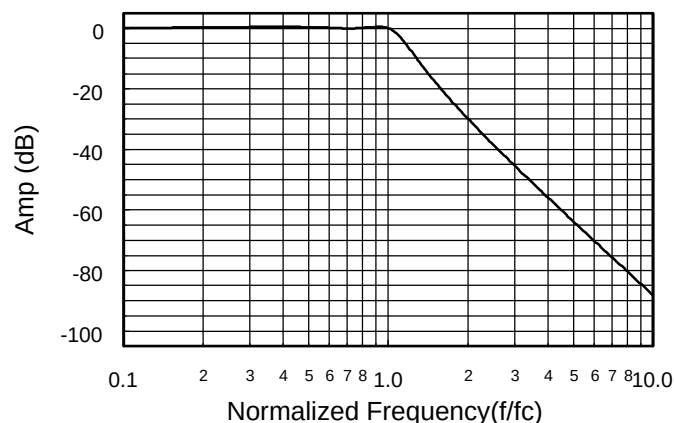

Delay (Normalized)

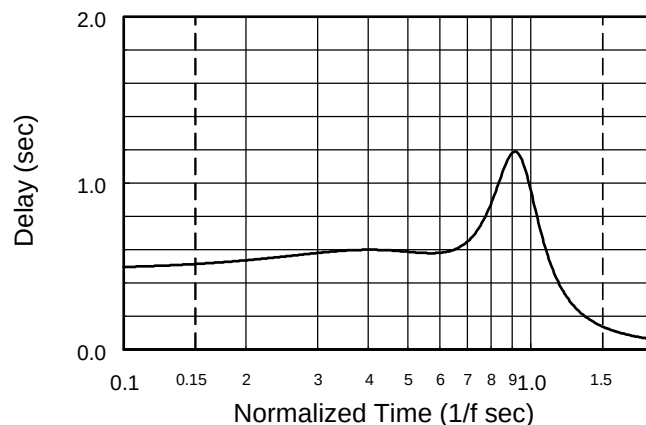


Step Response

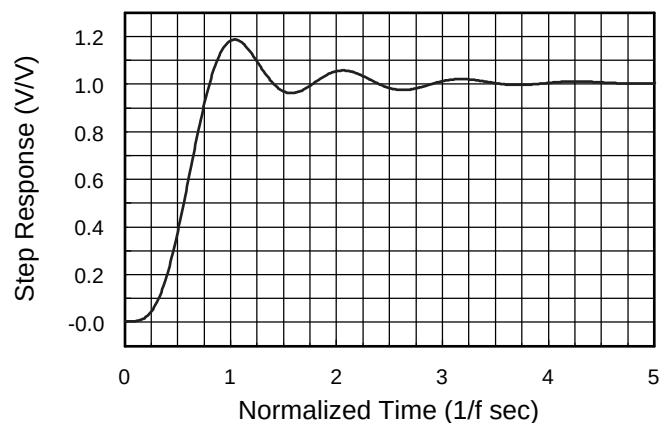

**Theoretical Transfer Characteristics**

f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.10	-80.0	345	.418
0.20	-55.9	330	.423
0.30	-41.8	314	.433
0.40	-31.8	299	.449
0.50	-24.1	282	.474
0.60	-17.8	264	.511
0.70	-12.6	245	.558
0.80	-8.43	224	.604
0.85	-6.69	213	.619
0.90	-5.22	202	.622
0.95	-3.99	191	.612
1.00	-3.01	180	.588
1.20	-0.908	143	.427
1.40	-0.285	118	.289
1.60	-0.100	100	.204
1.80	-0.039	87.6	.152
2.00	-0.017	78.0	.119
2.50	-0.003	61.4	.072
3.00	-0.001	50.7	.049
4.00	0.00	37.8	.027
5.00	0.00	30.1	.017
6.00	0.00	25.1	.012
7.00	0.00	21.4	.009
8.00	0.00	18.8	.007
9.00	0.00	16.7	.005
10.0	0.00	15.0	.004

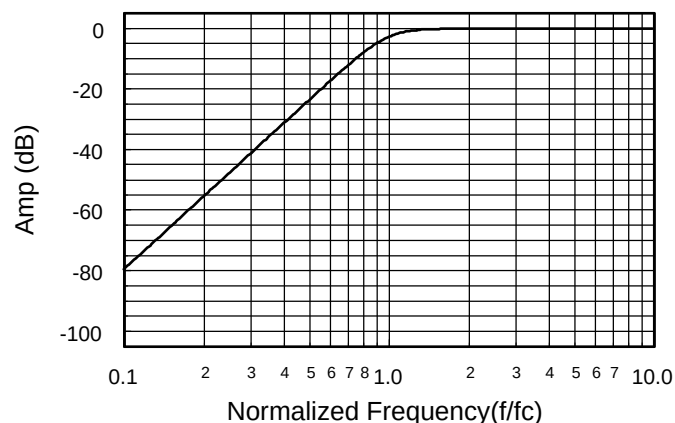Frequency Response**1. Normalized Group Delay:**

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (fc).


$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$



Theoretical Transfer Characteristics

f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.10	-89.8	352	.212
0.20	-65.1	345	.218
0.30	-51.1	337	.228
0.40	-40.6	328	.245
0.50	-32.2	319	.272
0.60	-25.0	308	.314
0.70	-18.6	296	.383
0.80	-12.7	280	.500
0.90	-7.34	259	.686
1.00	-3.01	231	.873
1.20	.140	172	.633
1.50	.031	128	.275
1.70	.003	111	.197
2.00	.074	93.2	.138
2.50	.174	73.4	.088
3.00	.200	60.4	.060
4.00	.170	44.5	.033
5.00	.129	35.2	.020
6.00	.098	29.2	.014
7.00	.076	24.9	.010
8.00	.060	21.7	.008
9.00	.048	19.3	.006
10.0	.040	17.3	.005

Frequency Response

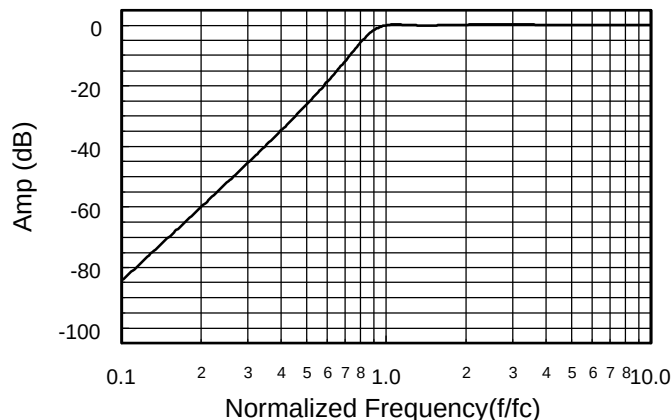

1. Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (f_c).


$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency } (f_c) \text{ in Hz}}$$



Theoretical Transfer Characteristics

f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay¹ (sec)
0.10	-91.9	354	.174
0.20	-67.6	347	.179
0.30	-53.1	341	.188
0.40	-42.6	334	.203
0.50	-34.1	326	.226
0.60	-26.8	317	.263
0.70	-20.2	307	.326
0.80	-14.0	293	.440
0.90	-8.13	274	.651
1.00	-3.01	245	.946
1.20	.500	179	.693
1.50	.014	133	.271
1.70	.043	117	.199
2.00	.249	98.2	.146
2.50	.469	76.9	.095
3.00	.498	62.7	.065
4.00	.401	45.5	.035
5.00	.296	35.7	.021
6.00	.221	29.4	.014
7.00	.169	25.0	.010
8.00	.133	21.8	.008
9.00	.107	19.3	.006
10.0	.088	17.3	.005

Frequency Response

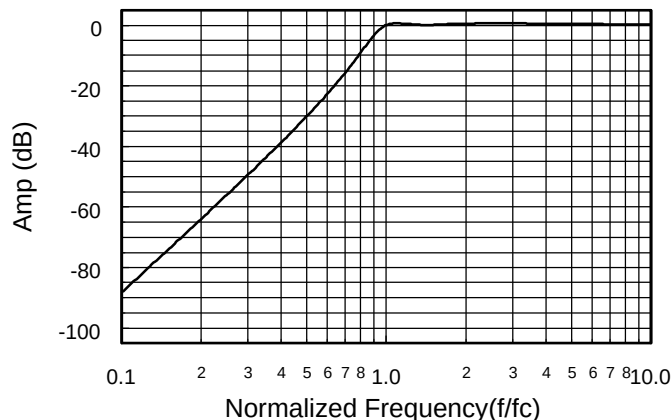

1. Normalized Group Delay:

The above delay data is normalized to a corner frequency of 1.0Hz. The actual delay is the normalized delay divided by the actual corner frequency (f_c).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency (fc) in Hz}}$$