



Siemens Matsushita Components

SAW Components Low Loss Filter

B4835
336,0 MHz

Data Sheet


Ceramic package **QCC12B**

Features

- Low-loss IF filter for mobile telephone
- Channel selection in GSM systems
- Ceramic SMD package
- Balanced and unbalanced operation possible

Terminals


- Gold-plated Ni

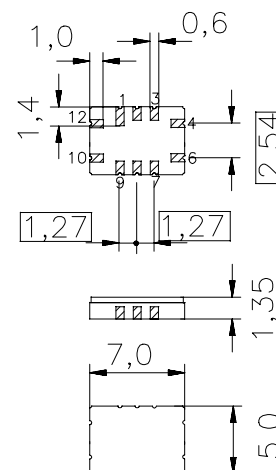

Dimensions in mm, approx. weight 0,2 g

Pin configuration

2	Input
1	Input ground or balanced input
8	Output
7	Output ground or balanced output
3, 9	Case – ground
4, 6, 10, 12	To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B4835	B39341-B4835-Z910	C61157-A7-A52	F61074-V8038-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 25/+ 80	°C
Storage temperature range	T_{stg}	- 25/+ 85	°C
DC voltage	V_{DC}	5	V
Source power	P_s	10	dBm



Siemens Matsushita Components

SAW Components Low Loss Filter

B4835
336,0 MHz


Data Sheet

Characteristics

Operating temperature: $T = -10$ to $+70$ °C
Terminating source impedance: $Z_S = 340 \Omega \parallel -3,2\text{pF}$
Terminating load impedance: $Z_L = 340 \Omega \parallel -3,2\text{pF}$

		min.	typ.	max.	
Nominal frequency	f_N	—	336,0	—	MHz
Minimum insertion attenuation	$\alpha_{\min}$				
including loss in matching elements		3,0	5,0	6,0	dB
excluding loss in matching elements		2,0	3,6	4,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
$f_N - 67,5$ kHz ... $f_N + 67,5$ kHz		—	0,3	2,0	dB
$f_N - 80,0$ kHz ... $f_N + 80,0$ kHz		—	0,4	3,0	dB
Group delay ripple (p-p)	$\Delta\tau$				
$f_N - 50,0$ kHz ... $f_N + 50,0$ kHz		—	0,5	1,5	μs
$f_N - 80,0$ kHz ... $f_N + 80,0$ kHz		—	0,8	2,0	μs
Relative attenuation (relative to $\alpha_{\min}$)	α_{rel}				
$f_N - 15,00$ MHz ... $f_N - 3,00$ MHz		50	70	—	dB
$f_N - 3,00$ MHz ... $f_N - 1,60$ MHz		48	60	—	dB
$f_N - 1,60$ MHz ... $f_N - 0,60$ MHz		38	52	—	dB
$f_N - 0,60$ MHz ... $f_N - 0,40$ MHz		27	46	—	dB
$f_N - 0,40$ MHz ... $f_N - 0,20$ MHz		2	11	—	dB
$f_N + 0,20$ MHz ... $f_N + 0,40$ MHz		2	11	—	dB
$f_N + 0,40$ MHz ... $f_N + 0,60$ MHz		27	34	—	dB
$f_N + 0,60$ MHz ... $f_N + 1,60$ MHz		38	45	—	dB
$f_N + 1,60$ MHz ... $f_N + 3,00$ MHz		48	58	—	dB
$f_N + 3,00$ MHz ... $f_N + 15,00$ MHz		50	70	—	dB
Impedance within the passband					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	$340 \parallel 3,2$	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	$340 \parallel 3,2$	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,036	—	ppm/K ²
Frequency inversion point	T_0	—	30	—	°C

¹⁾ Temperature dependence of f_c : $f_c(T) = f_c(T_0)(1 + TC_f(T - T_0)^2)$

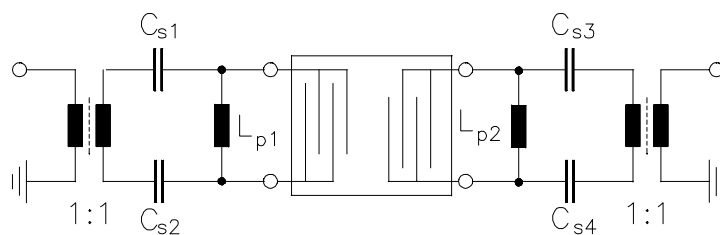

$C_{s1,s2} = 5,6$ pF
 $L_{p1} = 33$ nH
 $L_{p2} = 33$ nH
 $C_{s3,s4} = 5,6$ pF




Siemens Matsushita Components

SAW Components Low Loss Filter

B4835
336,0 MHz

Data Sheet

Transfer function:

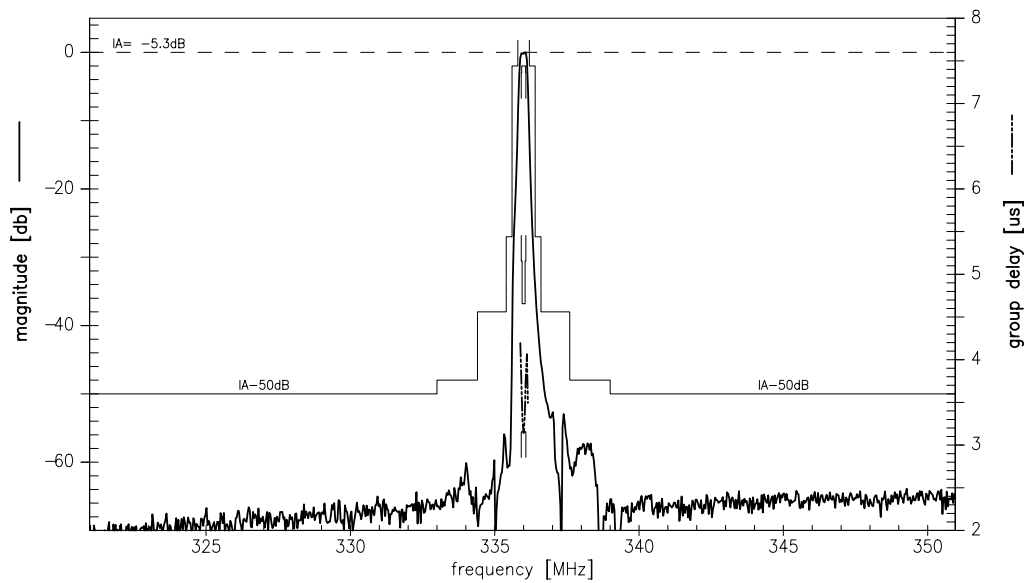

Transfer function (pass band):

