



SAW Components

Data Sheet B7701

Data Sheet

An abstract, grayscale graphic featuring a globe with a grid of latitude and longitude lines. Overlaid on the globe is a large, stylized, 3D-effect word "EPCOS" in a light gray color. The word is tilted and appears to be floating or attached to the globe's surface. The overall image has a soft, ethereal quality with some light flares and a dark, textured background.

EPCOS



SAW Components

B7701

Low-Loss Filter for Mobile Communication

881,5 MHz


Data Sheet



Features

- Low-loss RF filter for mobile telephone AMPS system, receive path
- Low amplitude ripple
- Usable passband 25 MHz
- Unbalanced to balanced operation
- Impedance transformation from 50 Ω to 200 Ω
- Package for **Surface Mounted Technology (SMT)**

Chip Sized SAW Package QCS5A

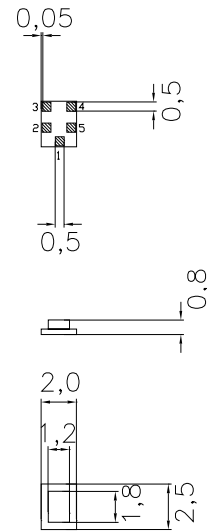


Dimensions in mm, approx. weight 0,015g

Terminals

- Ni, gold-plated

Pin configuration

- | | |
|------|------------------------|
| 1 | Input |
| 3, 4 | Balanced output |
| 2, 5 | Ground, to be grounded |

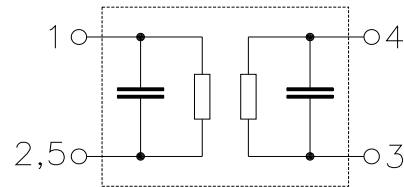

Type	Ordering code	Marking and Package according to	Packing according to
B7701	B39881-B7701-B610	C61157-A7-A71	F61074-V8104-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	peak power of GSM850 signal, duty cycle 1:4
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
Input power max. 824...849 MHz	P_{IN}	18	dBm	



SAW Components

B7701

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +25\text{ °C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 200\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}				
869,0 ... 894,0 MHz		—	2,3	2,6	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	0,6	1,0	dB
VSWR					
869,0 ... 894,0 MHz		—	1,8	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{32}) + 180^\circ$)					
869,0 ... 894,0 MHz		-10,0	0	10,0	degree
Output amplitude balance ($ S_{31}/S_{32} $)					
869,0 ... 894,0 MHz		-1,0	0	1,0	dB
Attenuation	α				
0,0 ... 824,0 MHz		50,0	60,0	—	dB
824,0 ... 849,0 MHz		35,0	40,0	—	dB
914,0 ... 924,0 MHz		25,0	28,0	—	dB
924,0 ... 970,0 MHz		30,0	36,0	—	dB
970,0 ... 3000,0 MHz		50,0	70,0	—	dB
3000,0 ... 6000,0 MHz		45,0	60,0	—	dB
Tx band suppression	α				
824,0 ... 849,0 MHz		35,0	40,0	—	dB



SAW Components

B7701

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30$ to $+85$ °C
Terminating source impedance: $Z_S = 50 \Omega$
Terminating load impedance: $Z_L = 200 \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}				
869,0 ... 894,0 MHz		—	2,6	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
869,0 ... 894,0 MHz		—	1,0	1,4	dB
VSWR					
869,0 ... 894,0 MHz		—	1,8	2,0	
Output phase balance ($\phi(S_{31}) - \phi(S_{32}) + 180^\circ$)					
869,0 ... 894,0 MHz		-10,0	0	10,0	degree
Output amplitude balance (S_{31}/S_{32})					
869,0 ... 894,0 MHz		-1,0	0	1,0	dB
Attenuation	α				
0,0 ... 824,0 MHz		50,0	60,0	—	dB
824,0 ... 849,0 MHz		35,0	40,0	—	dB
914,0 ... 924,0 MHz		22,0	26,0	—	dB
924,0 ... 970,0 MHz		30,0	36,0	—	dB
970,0 ... 3000,0 MHz		50,0	70,0	—	dB
3000,0 ... 6000,0 MHz		45,0	60,0	—	dB
Tx band suppression	α				
824,0 ... 849,0 MHz		35,0	40,0	—	dB



SAW Components

B7701


Low-Loss Filter for Mobile Communication

881,5 MHz


Data Sheet



Transfer function (narrowband measurement)

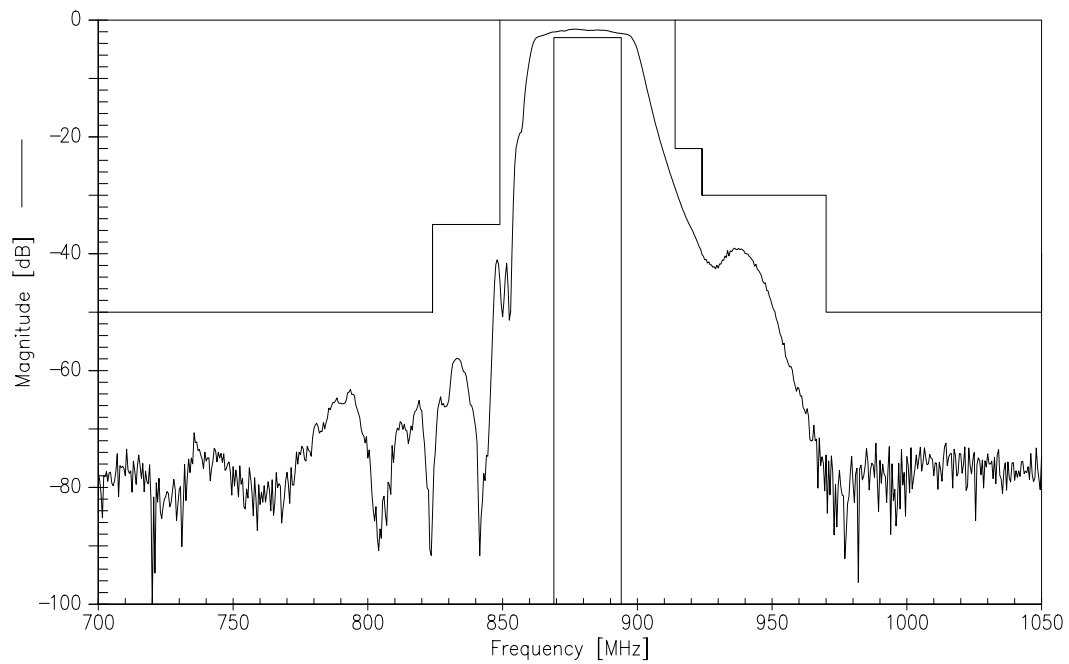

Transfer function (wideband measurement)

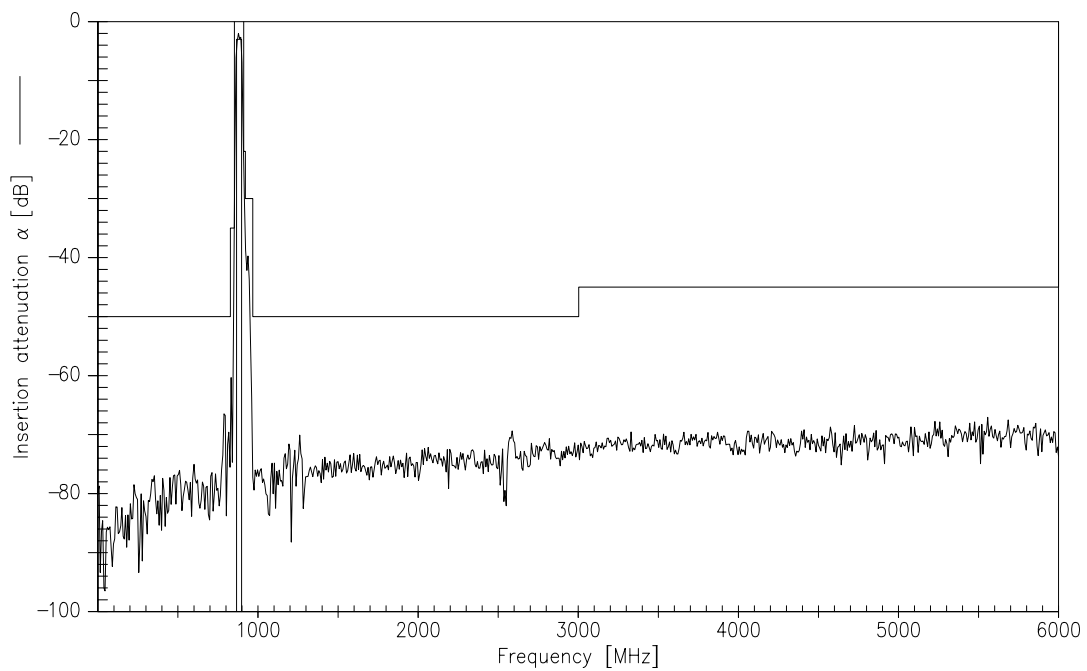



SAW Components

B7701

Low-Loss Filter for Mobile Communication



881,5 MHz

Data Sheet





Reflection functions (measurement)

S_{11}

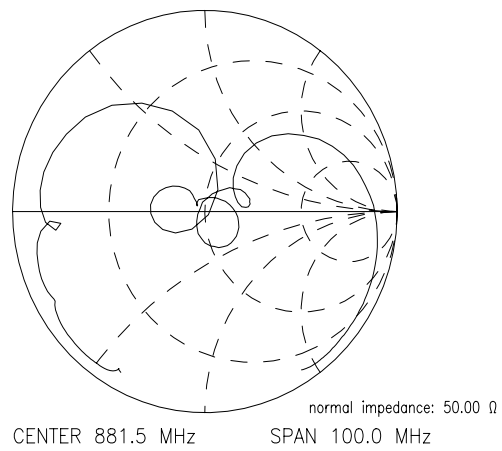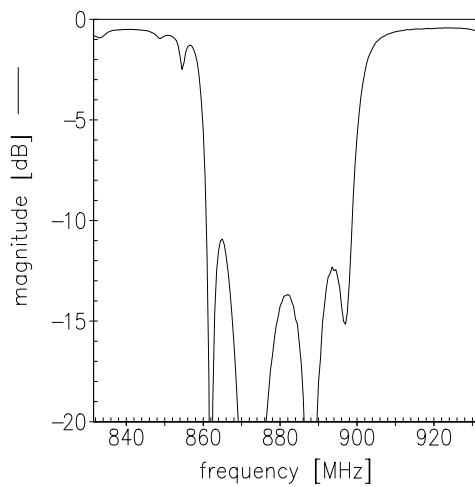

S_{22}

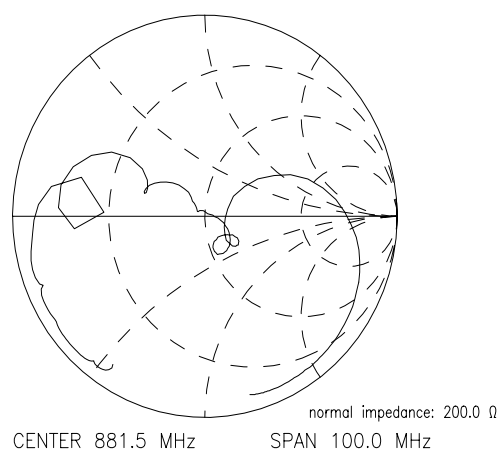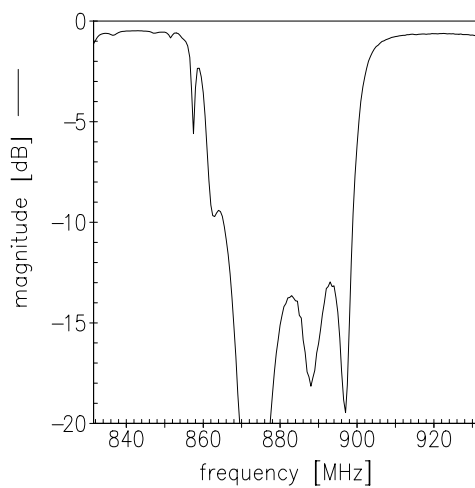



SAW Components

B7701


Low-Loss Filter for Mobile Communication

881,5 MHz


Data Sheet



Output amplitude balance ($|S_{31}/S_{21}|$; measurement)

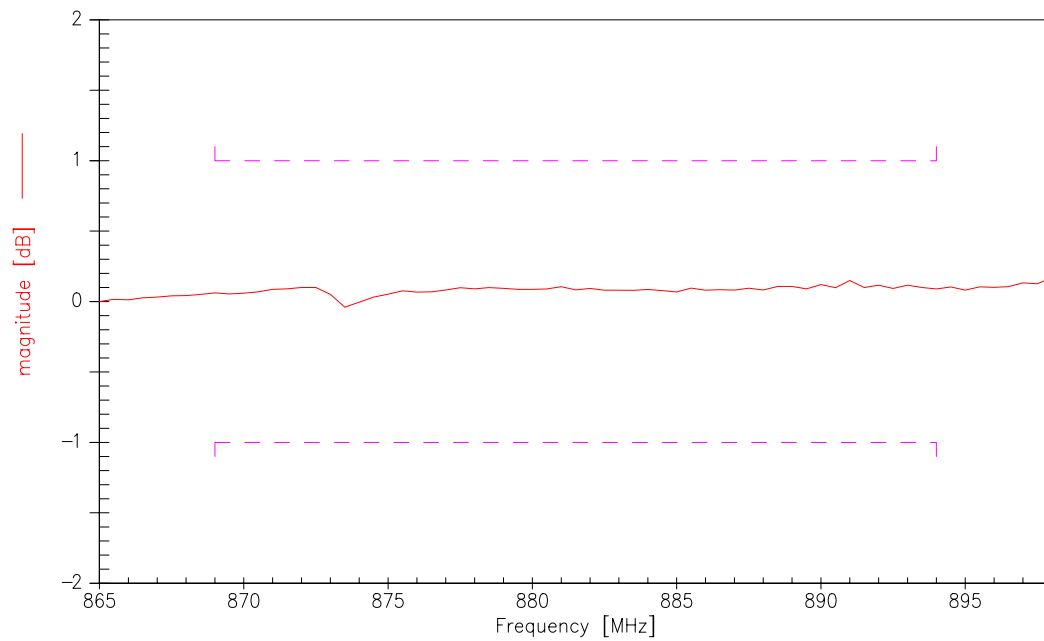

Output phase balance ($\phi(S_{31}) - \phi(S_{21}) + 180^\circ$; measurement)

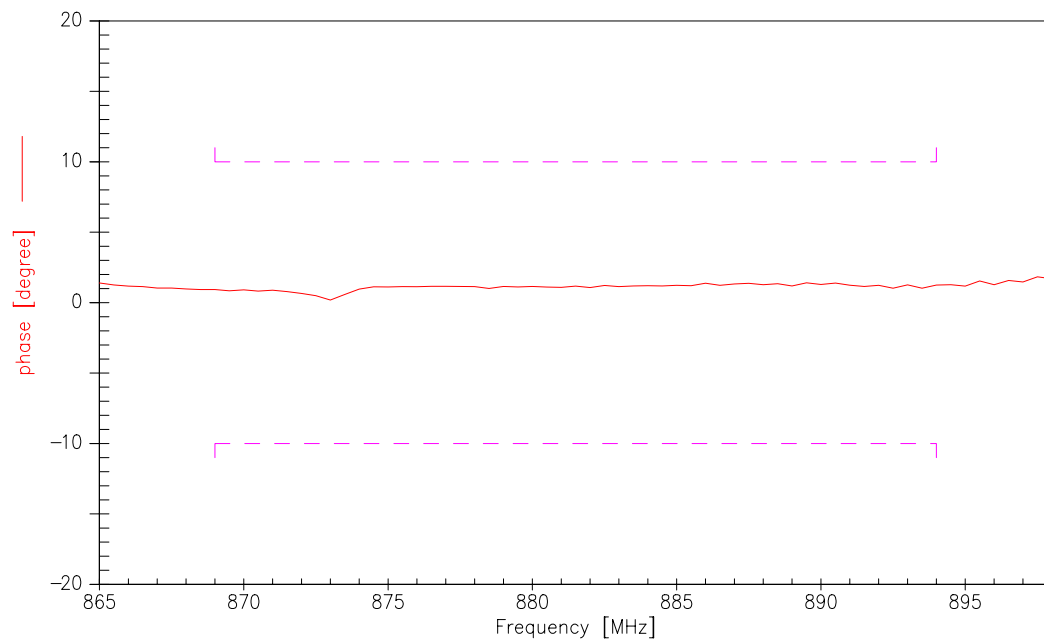



SAW Components

B7701

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.