


**PNP Silicon AF Transistors**

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types:

BC846W, BC847W, BC848W  
 BC849W, BC850W (NPN)

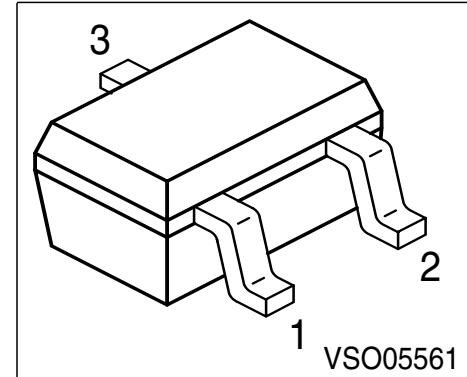

Type	Marking	Pin Configuration			Package
BC856AW	3As	1 = B	2 = E	3 = C	SOT323
BC856BW	3Bs	1 = B	2 = E	3 = C	SOT323
BC857AW	3Es	1 = B	2 = E	3 = C	SOT323
BC857BW	3Fs	1 = B	2 = E	3 = C	SOT323
BC857CW	3Gs	1 = B	2 = E	3 = C	SOT323
BC858AW	3Js	1 = B	2 = E	3 = C	SOT323
BC858BW	3Ks	1 = B	2 = E	3 = C	SOT323
BC858CW	3Ls	1 = B	2 = E	3 = C	SOT323
BC859AW	4As	1 = B	2 = E	3 = C	SOT323
BC859BW	4Bs	1 = B	2 = E	3 = C	SOT323
BC859CW	4Cs	1 = B	2 = E	3 = C	SOT323
BC860BW	4Fs	1 = B	2 = E	3 = C	SOT323
BC860CW	4Gs	1 = B	2 = E	3 = C	SOT323

**Maximum Ratings**

<b>Parameter</b>	<b>Symbol</b>	<b>BC856W</b>	<b>BC857W BC860W</b>	<b>BC858W BC859W</b>	<b>Unit</b>
Collector-emitter voltage	$V_{CEO}$	65	45	30	V
Collector-base voltage	$V_{CBO}$	80	50	30	
Collector-emitter voltage	$V_{CES}$	80	50	30	
Emitter-base voltage	$V_{EBO}$	5	5	5	
DC collector current	$I_C$		100		mA
Peak collector current	$I_{CM}$		200		mA
Peak base current	$I_{BM}$		200		
Peak emitter current	$I_{EM}$		200		
Total power dissipation, $T_S = 124\text{ }^\circ\text{C}$	$P_{tot}$		250		mW
Junction temperature	$T_j$		150		$^\circ\text{C}$
Storage temperature	$T_{stg}$		-65 ... 150		

**Thermal Resistance**

Junction - soldering point <sup>1)</sup>	$R_{thJS}$	$\leq 105$	K/W
--	------------	------------	-----

**Electrical Characteristics at  $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise specified.**

<b>Parameter</b>	<b>Symbol</b>	<b>Values</b>			<b>Unit</b>
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	

**DC Characteristics**

Collector-emitter breakdown voltage $I_C = 10\text{ mA}, I_B = 0$	$V_{(BR)CEO}$ BC856W BC857/860W BC858/859W	65 45 30	-	-	V
Collector-base breakdown voltage $I_C = 10\text{ }\mu\text{A}, I_E = 0$	$V_{(BR)CBO}$ BC856W BC857/860W BC858/859W	80 50 30	-	-	

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 10 \mu\text{A}, V_{BE} = 0$	$V_{(\text{BR})\text{CES}}$	80	-	-	V
		50	-	-	
		30	-	-	
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
		-	-	15	
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0$	$I_{CBO}$	-	-	15	nA
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	$I_{CBO}$	-	-	5	$\mu\text{A}$
DC current gain 1) $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}$	$h_{FE}$	-	140	-	-
		-	250	-	
		-	480	-	
DC current gain 1) $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{FE}$	125	180	250	
		220	290	475	
		420	520	800	
Collector-emitter saturation voltage1) $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$ $I_C = 100 \text{ mA}, I_B = 5 \text{ mA}$	$V_{CE\text{sat}}$	-	75	300	mV
		-	250	650	
		-	-	-	
Base-emitter saturation voltage 1) $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$ $I_C = 100 \text{ mA}, I_B = 5 \text{ mA}$	$V_{BE\text{sat}}$	-	700	-	
		-	850	-	
		-	-	-	
Base-emitter voltage 1) $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$	$V_{BE(\text{ON})}$	600	650	750	
		-	-	820	
		-	-	-	

1) Pulse test:  $t \leq 300\mu\text{s}, D = 2\%$

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>AC characteristics</b>					
Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	250	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	3	5	pF
Emitter-base capacitance $V_{EB} = 0.5 \text{ V}, f = 1 \text{ MHz}$	$C_{eb}$	-	10	15	
Short-circuit input impedance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$	$h_{11e}$	-	2.7	-	kΩ
	$h_{FE-\text{gr.A}}$	-	4.5	-	
	$h_{FE-\text{gr.B}}$	-	8.7	-	
Open-circuit reverse voltage transf.ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$	$h_{12e}$	-	1.5	-	$10^{-4}$
	$h_{FE-\text{gr.A}}$	-	2	-	
	$h_{FE-\text{gr.B}}$	-	3	-	
Short-circuit forward current transf.ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$	$h_{21e}$	-	200	-	-
	$h_{FE-\text{gr.A}}$	-	330	-	
	$h_{FE-\text{gr.B}}$	-	600	-	
Open-circuit output admittance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$	$h_{22e}$	-	18	-	μS
	$h_{FE-\text{gr.A}}$	-	30	-	
	$h_{FE-\text{gr.B}}$	-	60	-	
Noise figure $I_C = 200 \mu\text{A}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}, f = 1 \text{ kHz}, \Delta f = 200 \text{ Hz}$	$F$	-	-	10	dB
BC856W					
BC857W					
BC858W					
Noise figure $I_C = 200 \mu\text{A}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}, f = 1 \text{ kHz}, \Delta f = 200 \text{ Hz}$	$F$	-	1	4	
BC859W		-	1	4	
BC860W		-	1	4	
Equivalent noise voltage $I_C = 200 \mu\text{A}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}, f = 10 \dots 50 \text{ Hz}$	$V_n$	-	-	0.11	μV
BC860W					

**Total power dissipation**  $P_{\text{tot}} = f(T_S)$

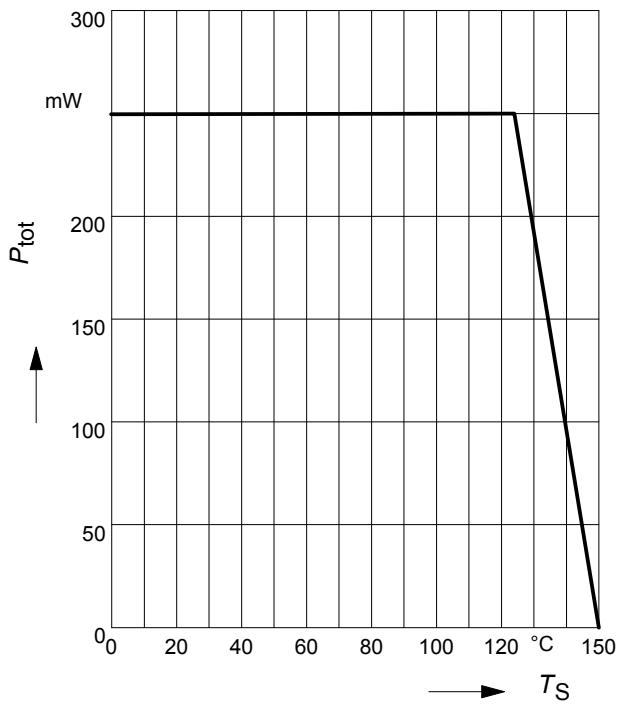


**Permissible pulse load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

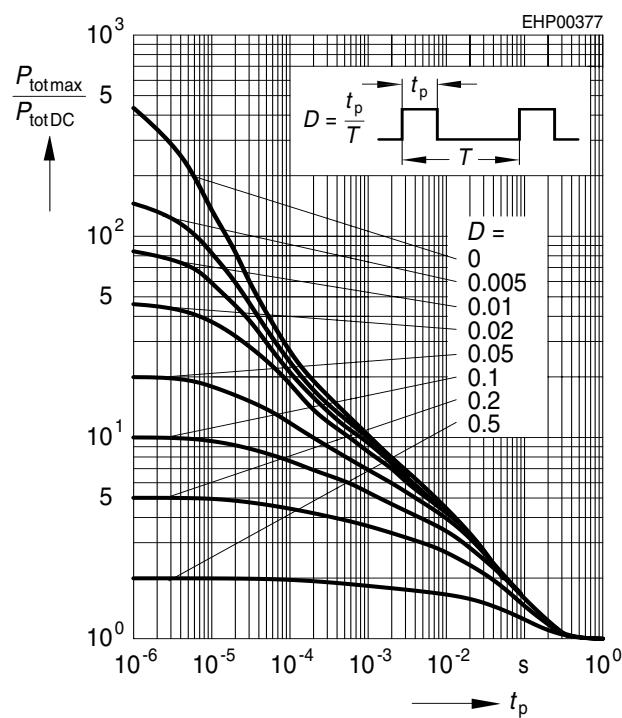


**Collector-base capacitance**  $C_{\text{CB}} = f(V_{\text{CBO}})$

**Emitter-base capacitance**  $C_{\text{EB}} = f(V_{\text{EBO}})$

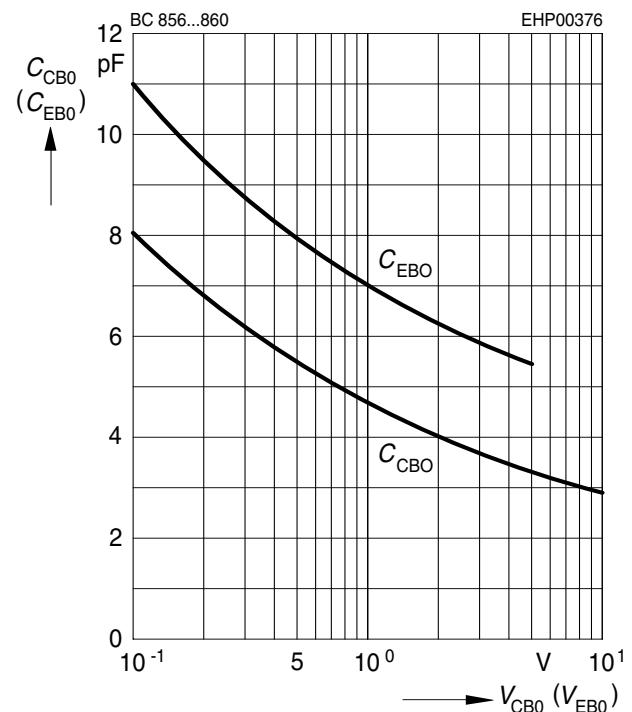


**Transition frequency**  $f_T = f(I_C)$

$V_{\text{CE}} = 5\text{V}$

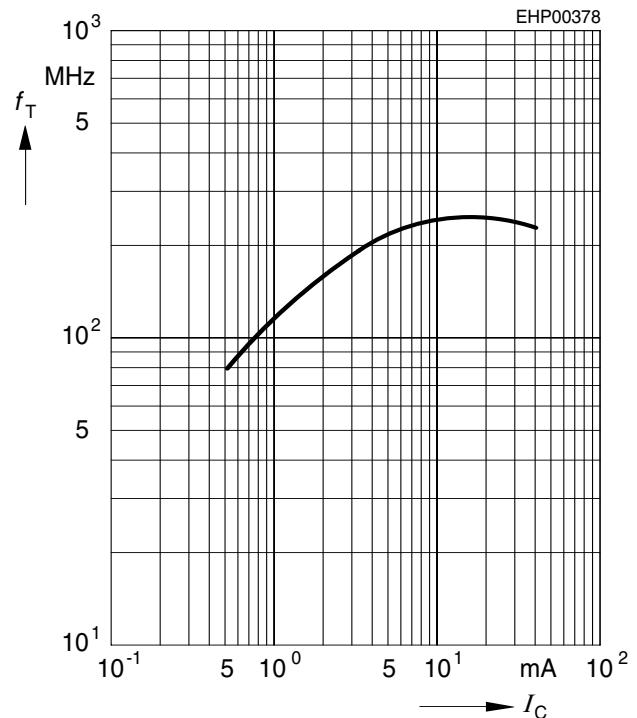


**Collector cutoff current**  $I_{CBO} = f(T_A)$

$V_{CB} = 30V$

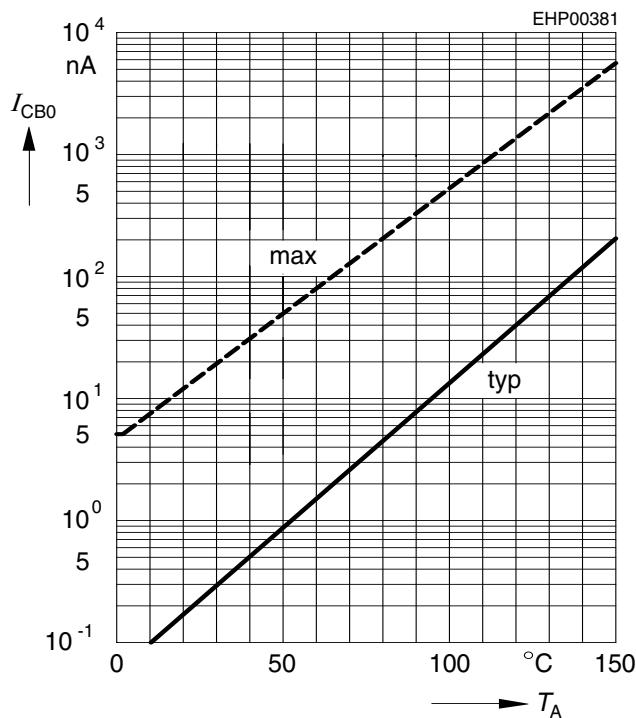


**DC current gain**  $h_{FE} = f(I_C)$

$V_{CE} = 5V$

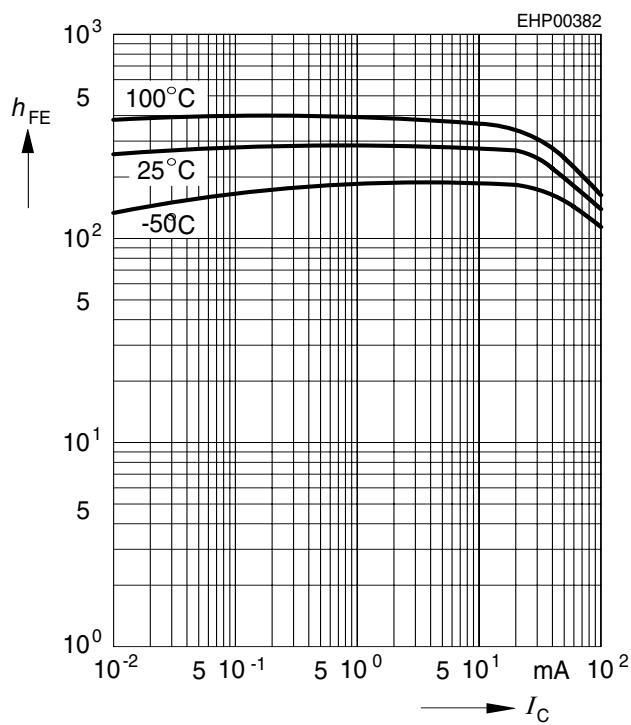


**Collector-emitter saturation voltage**

$I_C = f(V_{CEsat})$ ,  $h_{FE} = 20$

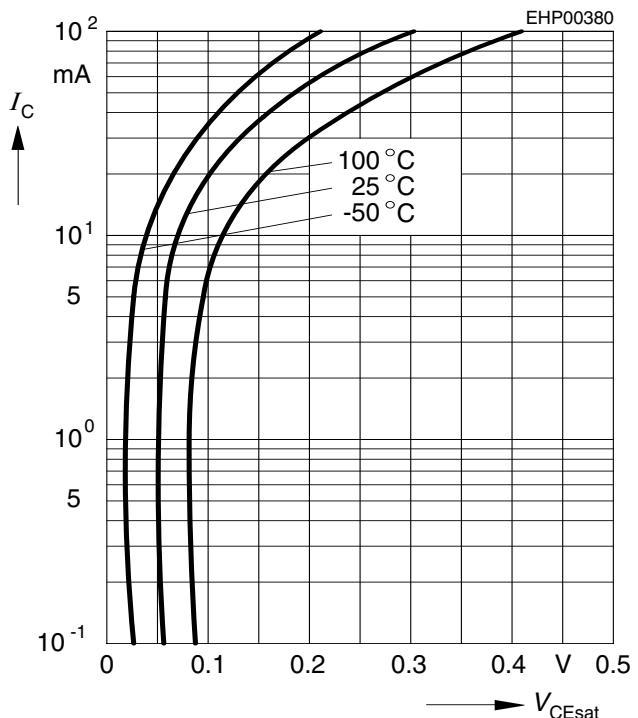


**Base-emitter saturation voltage**

$I_C = f(V_{BEsat})$ ,  $h_{FE} = 20$

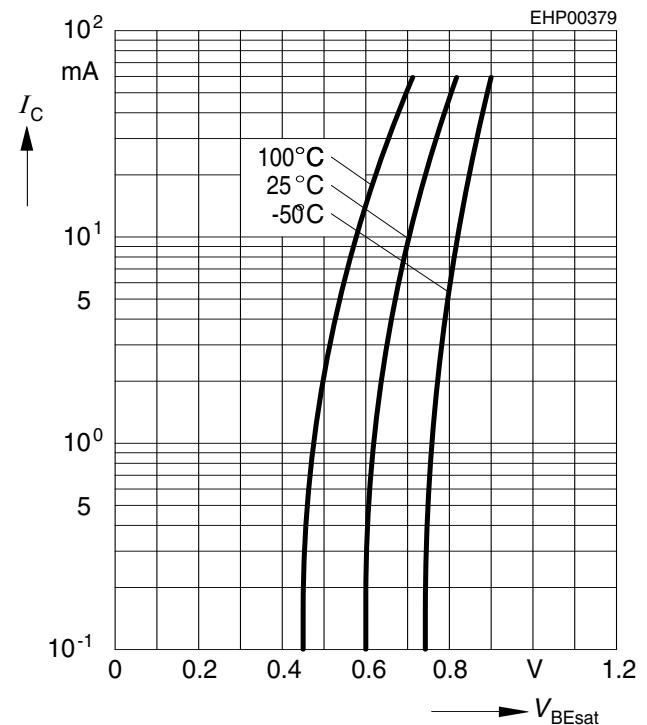

**h parameter  $h_e = f(I_C)$  normalized**

$V_{CE} = 5V$

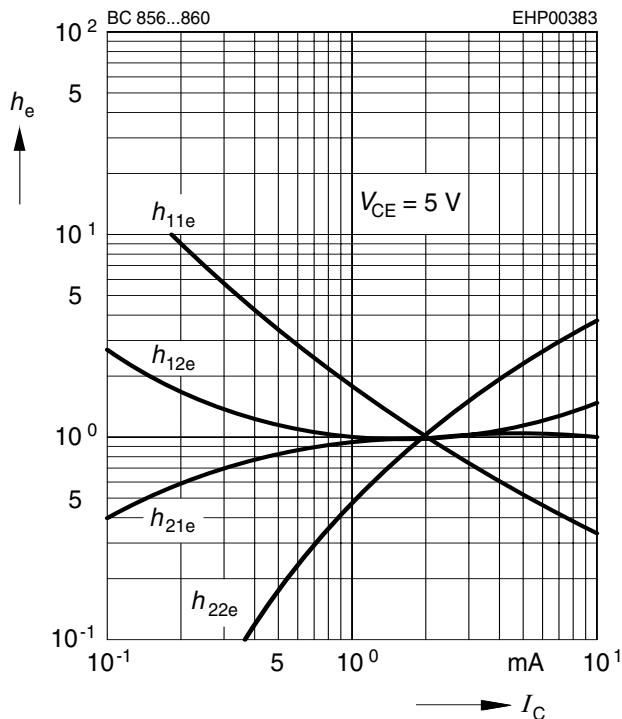


**Noise figure  $F = f(V_{CE})$**

$I_C = 0.2mA, R_S = 2k\Omega, f = 1kHz$



**h parameter  $h_e = f(V_{CE})$  normalized**



$I_C = 2mA$

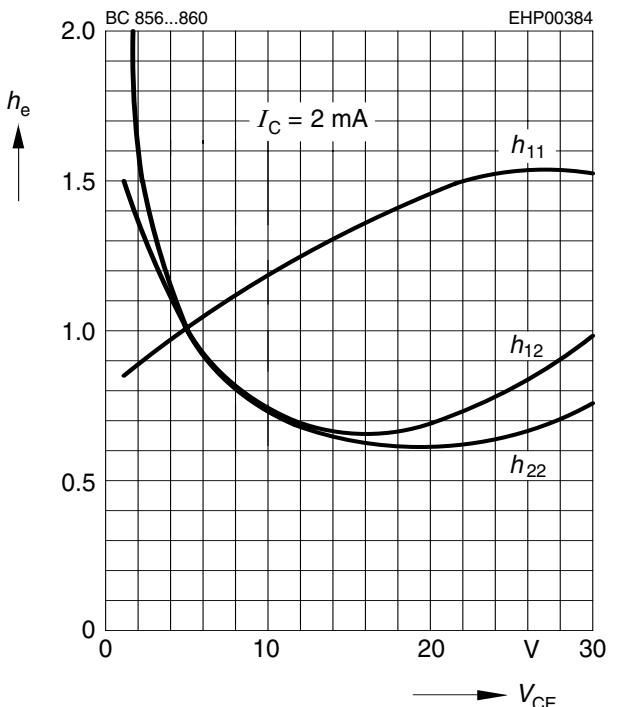

**Noise figure  $F = f(f)$**

$I_C = 0.2mA, V_{CE} = 5V, R_S = 2k\Omega$

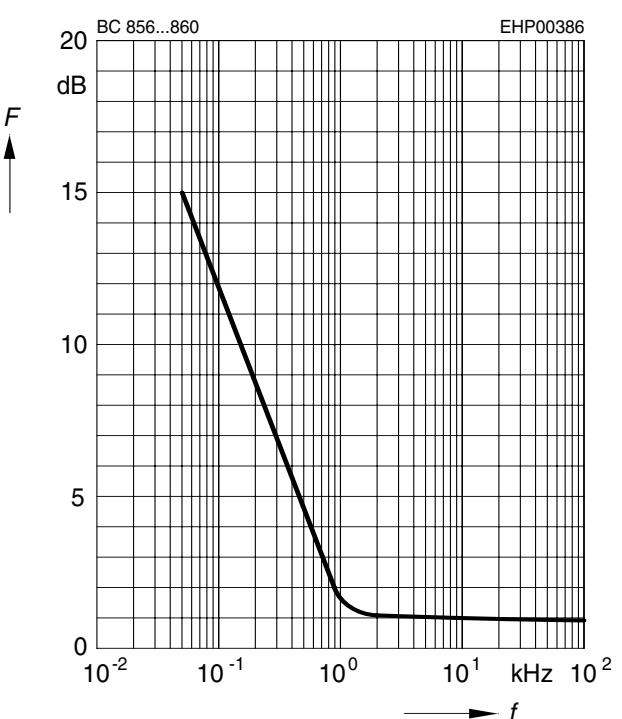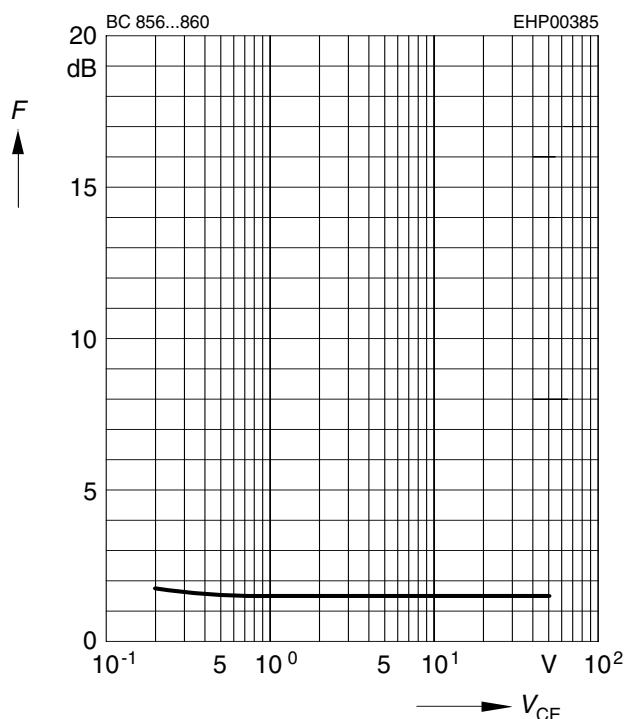

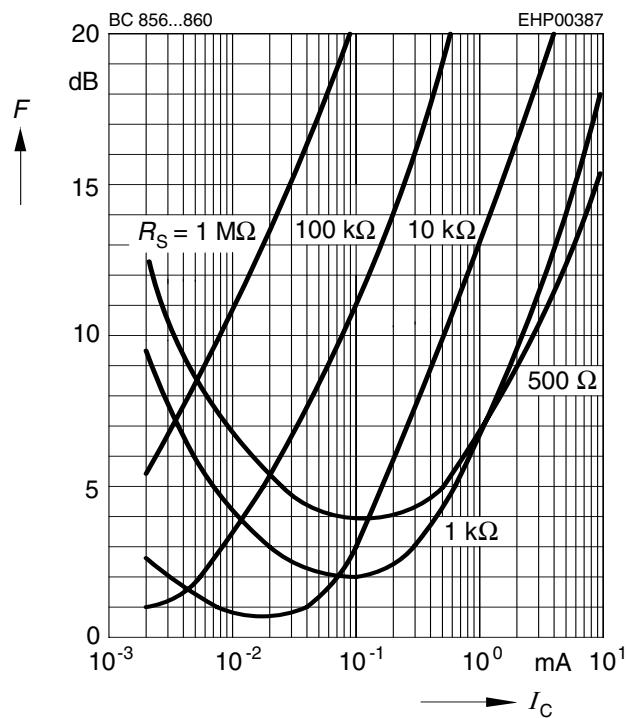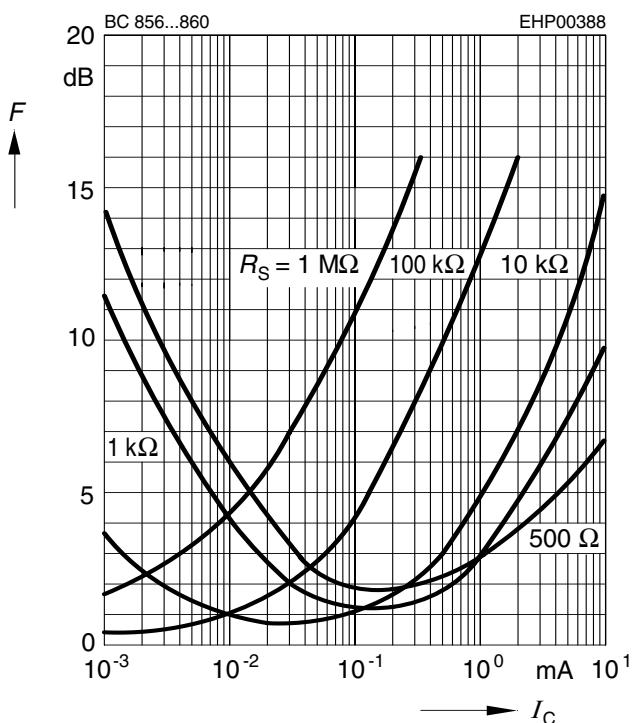**Noise figure  $F = f(I_C)$** 
 $V_{CE} = 5V, f = 120\text{Hz}$ 

**Noise figure  $F = f(I_C)$** 
 $V_{CE} = 5V, f = 1\text{kHz}$ 

**Noise figure  $F = f(I_C)$** 
 $V_{CE} = 5V, f = 10\text{kHz}$ 
