



Inductive sensor

Bi5-M18-VN4X



- threaded barrel, M18 x 1
- chrome-plated brass
- 4-wire DC, 10...65 VDC
- SPDT, npn output
- cable connection

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Bi5-M18-VN4X
Ident-No.	15711
Rated operating distance Sn	5 mm
Mounting mode	flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 65 VDC
Max. ripple	≤ 10 % U _{pp}
Rated operational current (DC) I _e	≤ 200 mA
No-load current I ₀	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 1 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	4-wire, complementary, NPN
Short-circuit protection	yes, cyclic
Max. voltage drop at I _e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Housing style	threaded barrel; M18 x 1
Dimensions	54 mm
Housing material	metal, CuZn, chrome-plated
Active face	plastic, PA12-GF30
Max. fixing torque of coupling nut	25 Nm
Wiring	cable
Cable	Ø 5,2, LifYY, PVC, 2 m
Cable cross section	4 x 0,34 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Switching status indication	LED yellow

Inductive sensor


Bi5-M18-VN4X

Mounting instructions

	minimum gap
Gap D	2 x B
Gap W	3 x Sn
Gap T	3 x B
Gap S	1,5 x B
Gap G	6 x Sn

Diameter of active face B


Ø 18 mm

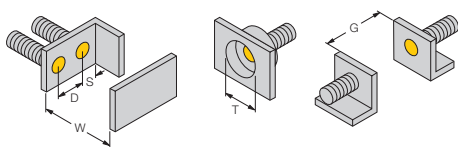

Inductive sensor

Bi5-M18-VN4X

Accessories

Typ	Ident-No.	Description	Dimension drawing
QM-18	6945102	quick-mount fixing clamp with dead-stop; material: chrome-plated brass external thread M24 x 1,5.	
BST-18B	6947214	fixing clamp with dead-stop; material: PA6	