



Inductive sensor

Bi2-Q12-AN6X-H1141



- rectangular, height 12mm
- side active face
- plastic, PBT-GF30-V0
- 3-wire DC, 10...30 VDC
- normally open npn output
- connector, M12 x 1

Wiring diagram

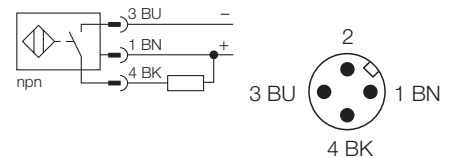

Type	Bi2-Q12-AN6X-H1141
Ident-No.	16190
Rated operating distance Sn	2 mm
Mounting mode	flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ...+ 70 °C
Rated operational voltage (DC) U_B	10... 30 VDC
Max. ripple	≤ 10 % U _{pp}
Rated operational current (DC) I _e	≤ 200 mA
No-load current I ₀	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 2 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	3-wire, normally open, NPN
Short-circuit protection	yes, cyclic
Max. voltage drop at I _e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Housing style	rectangular; Q12
Dimensions	40 x 26 x 12 mm
Housing material	plastic, PBT-GF30-V0
Active face	plastic, PBT-GF30-V0
Wiring	connector, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Switching status indication	LED yellow

Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Inductive sensor

Bi2-Q12-AN6X-H1141

Mounting instructions

	minimum gap
Gap D	$2 \times B$
Gap W	$3 \times S_n$
Gap S	$1 \times B$
Gap G	$6 \times S_n$

Width of active face B12 mm

