



## Dual Output Mixed Voltage, DLV Models

$V_{OUT}$  Combinations of 3.3/2.5/1.8/1.5/1.2 Volts  
30 Watt, DC/DC Converters

**PRELIMINARY**

### Features

- Two independently regulated outputs:  
3.3V @ 6A; 2.5V, 1.8V, 1.5V or 1.2V @ 7A
- 30 Watts total output power
- Available input voltage ranges:  
10-18V, 18-36V or 36-75V
- Independent output voltage adjustment
- Remote On/Off Control
- Synchronous rectifier; No load operation
- 2" x 2" package; Industry standard pinout
- IEC950/UL60950/EN60950 certified
- CE mark available (75VIN models)
- Input under and overvoltage shutdown
- Output overvoltage protection
- Thermal shutdown
- Fully Isolated (1500Vdc)

The DLV (Dual Low Voltage) Series from DATEL provides both digital I/O and core logic supply voltages from a single 2" x 2" industry-standard pinout, plastic package. The DLV series allows for any dual-output combination of 3.3, 2.5, 1.8, 1.5 or 1.2 Volts with associated output currents of 6 Amps for 3.3V outputs and 7 Amps for 1.2-2.5V outputs. Any combination of these output currents is permissible to a total of 30 Watts of output power. All models are available with input ranges of 10 to 18V (-D12), 18 to 36V (-D24) or 36 to 75V (-D48).

Plug-in compatibility with a number of converters from other leading manufacturers is possible because DATEL offers these 30 Watt converters with the flexibility to add/remove the higher-voltage trim (pin 5). Each output is independently regulated with its own control loop to provide  $\pm 1.0\%$  line and load regulation. Fully synchronous output topology allows no load operation and high efficiencies. Models are available with either positive or negative on/off control. Both outputs are internally synchronized to eliminate asynchronous beat frequencies.

All models include input Pi filtering, input overvoltage and undervoltage shutdown circuitry, output overvoltage protection, output short-circuit and current limiting protection and thermal shutdown. These devices meet IEC950, UL60950 and EN60950 safety standards. CB reports are available on request. "-D48" models are CE marked (meet LVD requirements).

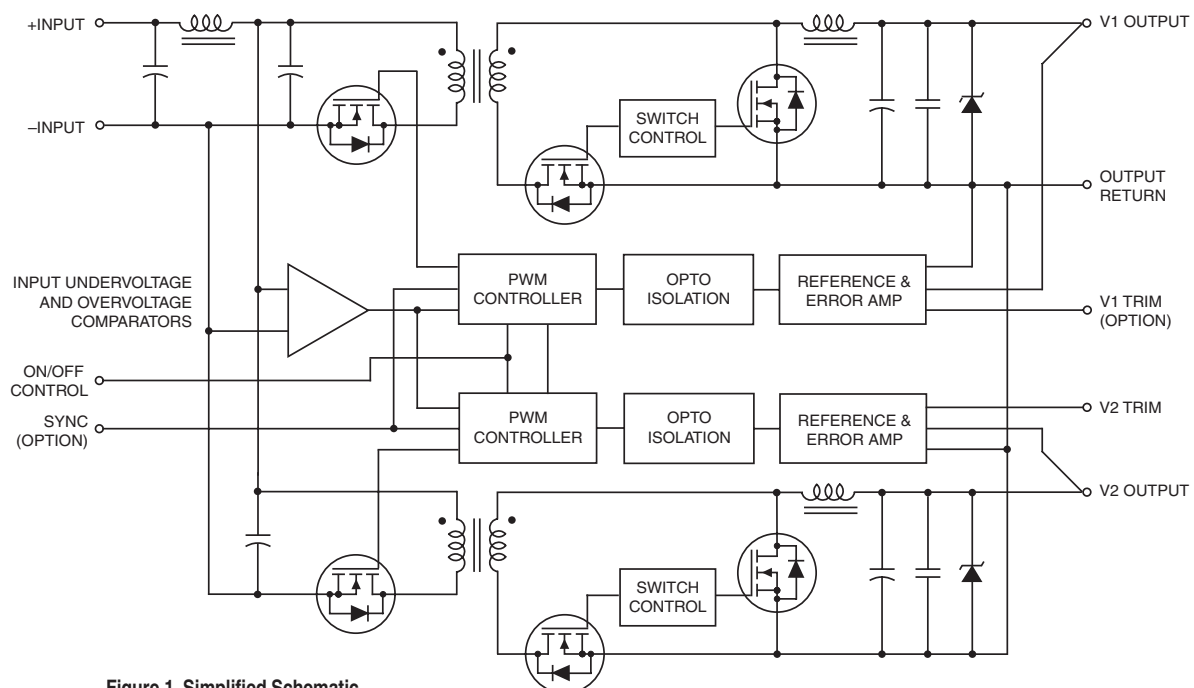


Figure 1. Simplified Schematic

Performance Specifications and Ordering Guide <sup>①</sup>

	Model	Output					Input			Efficiency		Package (Case, Pinout)	
		V <sub>OUT</sub> (Volts)	I <sub>OUT</sub> ② (Amps)	R/N (mVp-p) ③		Regulation (Max.)		V <sub>IN</sub> Nom. (Volts)	Range (Volts)	I <sub>IN</sub> ⑤ (mA)	Min.		Typ.
				Typ.	Max.	Line	Load ④						
PRELIMINARY	DLV-2.5/7-1.8/7-D12	2.5	7	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P48
		1.8	7	75	TBD	±1%	±1%						
	DLV-2.5/7-1.8/7-D24	2.5	7	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P48
		1.8	7	75	TBD	±1%	±1%						
	DLV-2.5/7-1.8/7-D48	2.5	7	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P48
		1.8	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.2/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P54
		1.2	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.2/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P54
		1.2	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.2/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P54
		1.2	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.5/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	85%	C26, P54
		1.5	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.5/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	85%	C26, P54
		1.5	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.5/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	85%	C26, P54
		1.5	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.8/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	83%	C26, P47
		1.8	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.8/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	83%	C26, P47
		1.8	7	75	TBD	±1%	±1%						
	DLV-3.3/6-1.8/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	83%	C26, P47
		1.8	7	75	TBD	±1%	±1%						
DLV-3.3/6-2.5/7-D12	3.3	6	75	TBD	±1%	±1%	12	10-18	TBD	TBD	85%	C26, P40	
	2.5	7	75	TBD	±1%	±1%							
DLV-3.3/6-2.5/7-D24	3.3	6	75	TBD	±1%	±1%	24	18-36	TBD	TBD	85%	C26, P40	
	2.5	7	75	TBD	±1%	±1%							
DLV-3.3/6-2.5/7-D48	3.3	6	75	TBD	±1%	±1%	48	36-75	TBD	TBD	85%	C26, P40	
	2.5	7	75	TBD	±1%	±1%							

① Typical at T<sub>A</sub> = +25°C under nominal line voltage and "balanced," full-power conditions:  
3.3V @ 4.5A/2.5V @ 6A; 3.3V @ 5.2A/1.8V @ 7A; 3.3V @ 5.2A/1.8V @ 7A; 2.5V @ 7A/1.8V @ 7A.


② Any combination of rated I<sub>OUT</sub> current, not to exceed 30 Watts of output power.  
(See derating graphs.)

③ Ripple/Noise (R/N) measured over a 20MHz bandwidth. All models are specified with  
TBD ceramic capacitors.


④ Tested from no load to 100% load (other output at no load).

⑤ Nominal line voltage, no load/balanced full-power condition.

## MECHANICAL SPECIFICATIONS

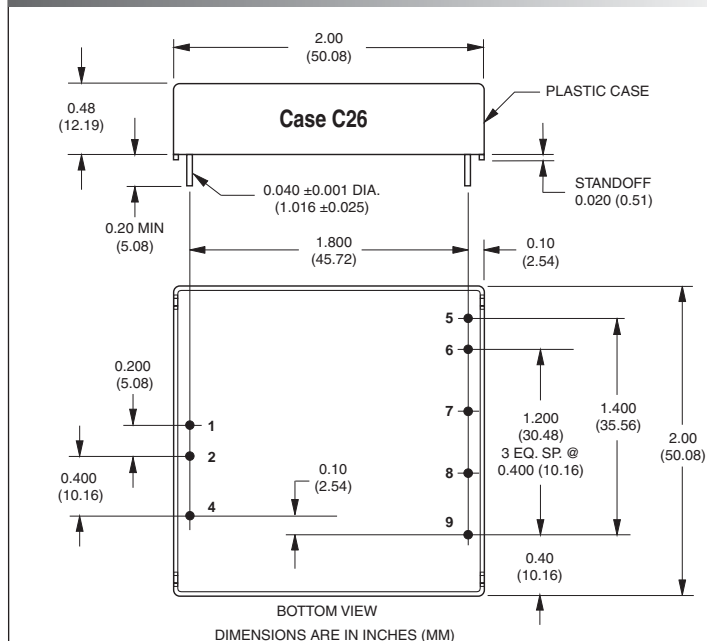

See page 5 for Part Number Structure and ordering details.

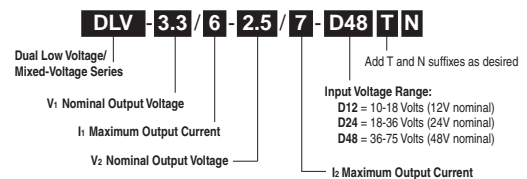

I/O Connections				
Pin	Function P40	Function P47	Function P48	Function P54
1	+Input	+Input	+Input	+Input
2	-Input	-Input	-Input	-Input
3	No Pin	No Pin	No Pin	No Pin
4	On/Off Control	On/Off Control	On/Off Control	On/Off Control
5	+3.3V Trim*	+3.3V Trim*	+2.5V Trim*	+3.3V Trim*
6	+3.3V Output	+3.3V Output	+2.5V Output	+3.3V Output
7	Output Return	Output Return	Output Return	Output Return
8	+2.5V Output	+1.8V Output	+1.8V Output	+1.5V Output
9	+2.5V Trim	+1.8V Trim	+1.8V Trim	+1.5V Trim

\* Optional pins

## Performance/Functional Specifications

Typical @  $T_A = +25^{\circ}\text{C}$  under nominal line voltage, balanced "full-load" conditions, unless noted. ①

Input	
<b>Input Voltage Range:</b>	
D12 Models	10-18 Volts (12V nominal)
D24 Models	18-36 Volts (24V nominal)
D48 Models	36-75 Volts (48V nominal)
<b>Overvoltage Shutdown:</b>	
D12 Models	19-23 Volts (21V nominal)
D24 Models	37-42 Volts (40V nominal)
D48 Models	77-81 Volts (79V nominal)
<b>Start-Up Threshold:</b>	
D12 Models	9-10 Volts (9.3V nominal)
D24 Models	16.5-18 Volts (17V nominal)
D48 Models	34.5-36 Volts (35V nominal)
<b>Undervoltage Shutdown:</b>	
D12 Models	8.5-9.6 Volts (9.3V nominal)
D24 Models	16-17 Volts (16.5V nominal)
D48 Models	33-35 Volts (34V nominal)
<b>Input Current:</b>	
Normal Operating Conditions	See Ordering Guide
Standby Mode:	
Off, OV, UV, Thermal Shutdown	10mA typical
<b>Input Reflected Ripple Current:</b>	
Source Impedance	
D12 Models	TBD
D24 Models	TBD
D48 Models	TBD
<b>Internal Input Filter Type</b>	Pi (0.039 $\mu\text{F}$ - 2.2 $\mu\text{H}$ - TBD)
<b>Reverse-Polarity Protection:</b>	
D12 Models	TBD minute duration, 6A maximum
D24 Models	TBD minute duration, 4A maximum
D48 Models	TBD minute duration, 2A maximum
<b>On/Off Control (Pin 4):</b> ③ ④ ⑥	
D12, D24, D48 Models	On = open or TBD to $+V_{IN}$ , $I_{IN} = \text{TBD}\mu\text{A}$ @ $\text{TBDV}$
	Off = 0-0.8V, $I_{IN} = \text{TBD}$ @ 0V
D12N, D24N, D48N Models	On = 0-0.8V, $I_{IN} = \text{TBD}$ @ 0V
	Off = open or TBD to +5.5V $I_{IN} = \text{TBD}\mu\text{A}$ @ $\text{TBDV}$
Output	
<b><math>V_{OUT}</math> Accuracy</b>	
2.5V/1.8V Models	1.5% / 2% maximum
3.3V/1.5V and 3.3V/1.8V Models	1% / 2% maximum
3.3V/2.5V Models	1% / 1.5% maximum
<b>Minimum Loading Per Specification</b>	No load
<b>Ripple/Noise (20MHz BW)</b>	See Ordering Guide
<b>Line/Load Regulation</b>	See Ordering Guide
<b>Efficiency</b>	See Ordering Guide/Efficiency Curves
<b>Trim Range</b> ⑧	$\pm 5\%$ each output
<b>Isolation Voltage:</b>	
Input-to-Output	1500Vdc
<b>Isolation Capacitance</b>	470pF
<b>Isolation Resistance</b>	100M $\Omega$
<b>Current Limit Inception:</b>	
2.5/1.8V Models	
2.5V @ 98% $V_{OUT}$ , 1.8V @ TBDA	TBD Amps
1.8V @ 98% $V_{OUT}$ , 2.5V @ TBDA	TBD Amps
3.3/1.5V Models	
3.3V @ 98.5% $V_{OUT}$ , 1.5V @ TBDA	TBD Amps
1.5V @ 98% $V_{OUT}$ , 3.3V @ TBDA	TBD Amps

Output (continued)	
<b>Current Limit Inception:</b>	
3.3/1.8V Models	
3.3V @ 98.5% $V_{OUT}$ , 1.8V @ TBDA	TBD Amps
1.8V @ 98% $V_{OUT}$ , 3.3V @ TBDA	TBD Amps 98.5% $V_{OUT}$
3.3V/2.5V Models	
3.3V @ 98.5% $V_{OUT}$ , 2.5V @ TBDA	TBD Amps
2.5V @ 98% $V_{OUT}$ , 3.3V @ TBDA	TBD Amps
<b>Short Circuit Current:</b>	
3.3V Outputs	TBD Amps average, continuous
2.5V Outputs	TBD Amps average, continuous
1.8V Outputs	TBD Amps average, continuous
1.5V Outputs	TBD Amps average, continuous
<b>Overvoltage Protection:</b>	
2.5/1.8V Models	Comparator, magnetic feedback TBD/TBD
3.3/1.5V Models	TBD/TBD
3.3/1.8V Models	TBD/TBD
3.3/2.5V Models	TBD/TBD
<b>Maximum Capacitive Loading</b>	
2.5/1.8V Models	TBD/TBD $\mu\text{F}$
3.3/1.5V Models	TBD/TBD $\mu\text{F}$
3.3/1.8V Models	TBD/TBD $\mu\text{F}$
3.3/2.5V Models	TBD/TBD $\mu\text{F}$
<b>Temperature Coefficient</b>	$\pm 0.02\%$ per $^{\circ}\text{C}$
Dynamic Characteristics	
<b>Dynamic Load Response:</b>	
2.5/1.8V Models	
2.5V (50-100% step to 1.5% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
1.8V (50-100% step to 2% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
3.3/1.5V Models	
3.3V (50-100% step to 1% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
1.8V (50-100% step to 2% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
3.3/1.8V Models	
3.3V (50-100% step to 1% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
1.8V (50-100% step to 2% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
3.3V/2.5V Models	
3.3V (50-100% step to 1% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
2.5V (50-100% step to 1.5% $V_{OUT}$ )	TBD $\mu\text{sec}$ maximum
<b>Start-Up Time:</b>	
$V_{IN}$ to $V_{OUT}$	TBD
On/Off to $V_{OUT}$	TBD
<b>Switching Frequency</b>	225kHz ( $\pm$ TBD kHz)
Environmental	
<b>MTBF</b>	
D12 Models	TBD hours
D24 Models	TBD hours
D48 Models	TBD hours
<b>Operating Temperature (Ambient):</b>	
Without Derating:	
2.5/1.8V Models	TBD
3.3/1.8V Models	TBD
3.3V/2.5V Models	TBD
With Derating	To $+100^{\circ}\text{C}$ (See Derating Curves)
<b>Case Temperature:</b>	
Maximum Operational	$+100^{\circ}\text{C}$
For Thermal Shutdown	TBD minimum, TBD maximum
<b>Storage Temperature</b>	$-40$ to $+120^{\circ}\text{C}$

Physical	
Dimensions	2" x 2" x 0.5" (50.8 x 50.8 x 12.7mm)
Case Material	Diallyl phthalate, UL94V-0 rated
Pin Material	Brass, solder coated
Weight:	TBD
Primary to Secondary Insulation Level	Operational

- ① All models are specified with external TBD ceramic output capacitors.
- ② See Technical Notes/Graphs for details.
- ③ Devices may be order with opposite polarity. See Part Number Suffixes and Technical Notes for details.
- ④ Applying a voltage to On/Off Control (pin 4) when no input power is applied to the converter may cause permanent damage.
- ⑤ Output noise may be further reduced with the installation of additional external output capacitors. See Technical Notes.
- ⑥ On/Off control is designed to be driven with open collector or by appropriate voltage levels. Voltages must be referenced to the -Input (pin 2).
- ⑦ Demonstrated MTBF available on request.
- ⑧ Trim function for the higher of two voltages available with "T" suffix. See Part Number Suffixes and Technical Notes for details.

Absolute Maximum Ratings		
<b>Input Voltage:</b>		
Continuous:	D12 Models	23 Volts
	D2A Models	42 Volts
	D48 Models	81 Volts
Transient (100msec):	D12 Models	25 Volts
	D24 Models	50 Volts
	D48 Models	100 Volts
<b>Input Reverse-Polarity Protection ②</b>		Input Current must be limited. TBD minute duration. Fusing recommended.
D12A Models		6 Amps
	D24A Models	4 Amps
	D48A Models	2 Amps
<b>Output Current ②</b>		Current limited. Devices can withstand an indefinite output short circuit.
<b>On/Off Control (Pin 4) Max. Voltages</b>		
Referenced to –Input (pin 2)		
No Suffix		+VIN
"N" Suffix		+8 Volts
<b>Sync Control (Pin 3) Max. Voltages</b>		
"S" Suffix		+5.7 Volts
<b>Storage Temperature</b>		–40 to +120°C
<b>Lead Temperature (Soldering, 10 sec.)</b>		+300°C
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. Proper operation under conditions other than those listed in the Performance/Functional Specifications Table is not implied, nor recommended.		

## TECHNICAL NOTES

## On/Off Control

The primary-side, remote On/Off Control function (pin 4) can be specified to operate with either positive or negative polarity. Positive polarity devices (no suffix) are enabled when pin 4 is left open or pulled high (+TBDV to +TBDV with respect to -Input). Positive polarity devices are disabled when pin 4 is pulled low (0-0.8V with respect to -Input). Negative polarity devices are off when pin 4 is high/open and on when pin 2 is pulled low.

For applications where power sequencing is critical, the DLV series can be configured such that the On/Off Control pin will enable/disable only the higher of the two output voltages. Contact DATEL for more information.

## Trimming Output Voltages

These DLV converters have a trim capability (pins 9 & 5) that allow users to independently adjust the output voltages  $\pm 5\%$ . (Note: pin 5 is an option, see ordering information.) Adjustments to the output voltages can be accomplished via a trim pot, Figure 2, or a single fixed resistor as shown in Figures 3 and 4. A single fixed resistor can increase or decrease the output voltage depending on its connection. Fixed resistors should have absolute TCR's less than 100ppm/°C to minimize sensitivity to changes in temperature.

A single resistor connected from the Trim pin 9 to +Output (pin 8), see Figure 3, will decrease the lower output voltage. A resistor connected from Trim pin 9 to Output Return (pin 7) will increase the lower output voltage. See Figure 4.

Similarly, the higher output voltage can be adjusted using a single resistor connected from the Trim (pin 5) to +Output (pin 6) or to Output Return (pin 7). See Figures 3 and 4.

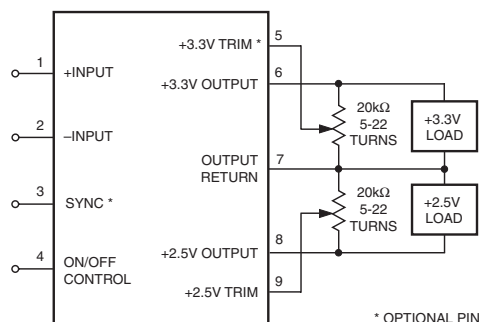


Figure 2. Trim Connections Using A Trim Pot

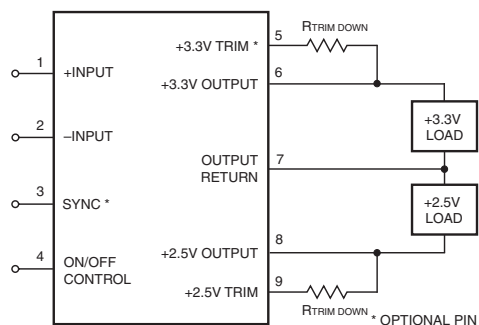


Figure 3. Trim Connections To Decrease Output Voltages Using Fixed Resistors

## 3.3 Volt Trim Down

$$R_{T\_DOWN} (k\Omega) = \left[ \frac{3.48(V_O - 1.577)}{3.3 - V_O} \right] - 28.7$$

## 2.5 Volt Trim Down

$$R_{T\_DOWN} (k\Omega) = \left[ \frac{2.41(V_O - 1.18)}{2.5 - V_O} \right] - 19.7$$

## 1.8 Volt Trim Down

$$R_{T\_DOWN} (k\Omega) = \left[ \frac{1.73(V_O - 0.86)}{1.8 - V_O} \right] - 14.17$$

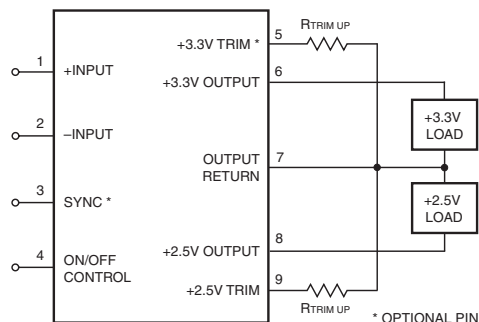


Figure 4. Trim Connections To Increase Output Voltages Using Fixed Resistors

**3.3 Volt Trim Up**

$$R_{TUP} (k\Omega) = \left[ \frac{2.84}{V_o - 2.5} \right] - 19.7$$

**2.5 Volt Trim Up**


$$R_{TUP} (k\Omega) = \left[ \frac{5.88}{V_o - 3.3} \right] - 28.7$$

**1.8 Volt Trim Up**

$$R_{TUP} (k\Omega) = \left[ \frac{1.49}{V_o - 1.8} \right] - 14.17$$

Note: Resistor values are in  $k\Omega$ . Accuracy of adjustment is subject to tolerances of resistors and factory-adjusted output accuracy.  
 $V_o$  = desired output voltage.

## PART NUMBER STRUCTURE

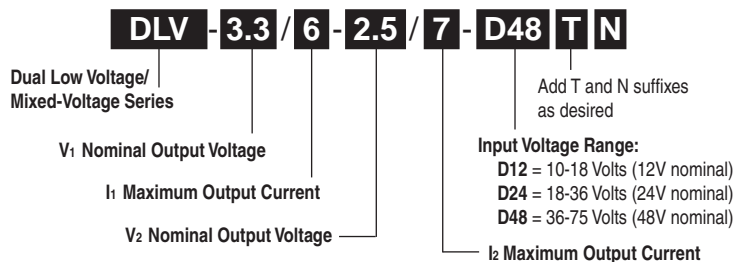**Part Number Suffixes**

Standard DLV DC/DC's provide a Trim function (Pin 9) for the lower of the two output voltages. A Trim pin (Pin 5) for the higher voltage can be added by indicating a "T" suffix. An "N" suffix indicates that the On/Off Control function incorporates negative polarity logic.

**No Suffix** Pins 5 not installed, positive polarity On/Off Control

**T Suffix** Pin 5 added for higher voltage Trim option

**N Suffix** Negative polarity On/Off Control