

## Features

- 150 MHz — 3 dB bandwidth,  $A_V = 20$
- 10 ns settling to 0.1%
- $V_S = \pm 5V$  @ 15 mA
- 2.5 ns rise/fall times (2V step)
- Overload/short-circuit protected
- $\pm 7$  to  $\pm 50$  closed-loop gain range
- Low cost
- EL2171 is direct replacement for CLC401
- Disable capability on EL2071

## Applications

- Line drivers
- DC-coupled log amplifiers
- High-speed modems, radios
- High-speed A/D conversion
- D/A I-V conversion
- Photodiode, CCD preamps
- IF processors
- High-speed communications
- Analog multiplexing (using disable—EL2071)
- Power down mode (using disable—EL2071)

## Ordering Information

Part No.	Temp. Range	Package	Outline #
EL2171CN	-40°C to +85°C	8-Pin P-DIP	MDP0031
EL2171CS	-40°C to +85°C	8-Lead SO	MDP0027
EL2071CN	-40°C to +85°C	8-Pin P-DIP	MDP0031
EL2071CS	-40°C to +85°C	8-Lead SO	MDP0027

## General Description


The EL2071 and EL2171 are wide bandwidth, fast settling monolithic amplifiers built using an advanced complementary bipolar process. The EL2071 has a disable/enable feature which allows power down and analog multiplexing. These amplifiers use current-mode feedback to achieve more bandwidth at a given gain than conventional operational amplifiers. Designed for closed-loop gains of  $\pm 7$  to  $\pm 50$ , the EL2071 and EL2171 have a 150 MHz — 3 dB bandwidth ( $A_V = +20$ ), and 2.5 ns rise/fall time, while consuming only 15 mA of supply current. The EL2071 consumes only 1.5 mA when disabled.

The wide 150 MHz bandwidth and extremely linear phase (0.2 dB deviation from linear at 50 MHz) allow superior signal fidelity. These features make the EL2071 and EL2171 especially suited for many digital communication system applications.

The EL2071's and EL2171's settling to 0.1% in 10 ns and ability to drive capacitive loads make them ideal in flash A/D applications. D/A systems can also benefit from the EL2071 and EL2171, especially if linearity and drive levels are important.

Elantec products and facilities comply with MIL-I-45208A, and other applicable quality specifications. For information on Elantec's processing, see Elantec document, *QRA-1: Elantec's Processing, Monolithic Integrated Circuits*.

## Connection Diagrams

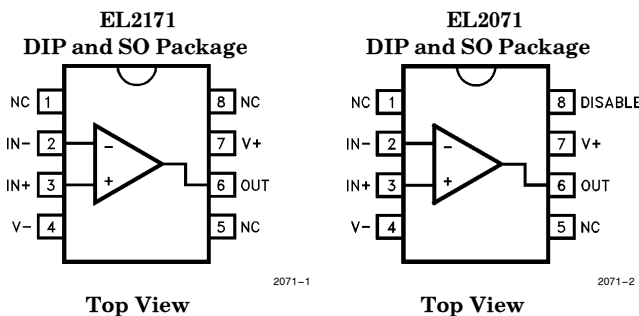

Manufactured under U.S. Patent No. 4,893,091

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

Supply Voltage ( $V_S$ )	$\pm 7\text{V}$	Power Dissipation	See Curves
Output Current	Output is short-circuit protected to ground, however, maximum reliability is obtained if $I_{OUT}$ does not exceed 70 mA.	Operating Temperature	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Common Mode Input Voltage	$\pm V_S$	Operating Junction Temperature	
Differential Input Voltage	5V	Ceramic Packages	175°C
		Plastic Packages	150°C
		Storage Temperature	$-60^\circ\text{C}$ to $+150^\circ\text{C}$

#### Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore  $T_J = T_C = T_A$ .

Test Level	Test Procedure
I	100% production tested and QA sample tested per QA test plan QCX0002.
II	100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$ , $T_{MAX}$ and $T_{MIN}$ per QA test plan QCX0002.
III	QA sample tested per QA test plan QCX0002.
IV	Parameter is guaranteed (but not tested) by Design and Characterization Data.
V	Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.

### Open Loop DC Electrical Characteristics

$V_S = \pm 5\text{V}$ ,  $R_L = 100\Omega$ , unless otherwise specified

Parameter	Description	Test Conditions	Temp	Min	Typ	Max	Test Level	Units
$V_{OS}$	Input Offset Voltage		$25^\circ\text{C}$		3	6	I	mV
			$T_{MIN}, T_{MAX}$			10	III	mV
TC $V_{OS}$	Average Offset Voltage Drift	(Note 1)	All		20	50	IV	$\mu\text{V}/^\circ\text{C}$
$+I_{IN}$	+ Input Current		$25^\circ\text{C}, T_{MAX}$		10	20	II	$\mu\text{A}$
			$T_{MIN}$			36	III	$\mu\text{A}$
TC ( $+I_{IN}$ )	Average + Input Current Drift	(Note 1)	All		100	200	IV	nA/ $^\circ\text{C}$
$-I_{IN}$	- Input Current		$25^\circ\text{C}$		10	30	I	$\mu\text{A}$
			$T_{MIN}$			46	III	$\mu\text{A}$
			$T_{MAX}$			40	III	$\mu\text{A}$
TC ( $-I_{IN}$ )	Average - Input Current Drift	(Note 1)	All		100	200	IV	nA/ $^\circ\text{C}$

# ***EL2071C/EL2171C***

## ***150 MHz Current Feedback Amplifier***

### **Open Loop DC Electrical Characteristics**

$V_S = \pm 5V$ ,  $R_L = 100\Omega$ , unless otherwise specified — Contd.

Parameter	Description	Test Conditions	Temp	Min	Typ	Max	Test Level	Units
PSRR	Power Supply Rejection Ratio	(Note 2)	All	50	55		II	dB
CMRR	Common-Mode Rejection Ratio		All	40	50		II	dB
$I_S$	Supply Current—Quiescent	No Load	All		15	21	II	mA
$I_{SOFF}$	Supply Current—Disabled	EL2071C (Note 3)	All		1.5	3.0	II	mA
$+R_{IN}$	+ Input Resistance		25°C, $T_{MAX}$	100	200		II	k $\Omega$
			$T_{MIN}$	50			III	k $\Omega$
$C_{IN}$	Input Capacitance		All		0.5	2.5	IV	pF
$R_{OUT}$	Output Resistance (DC)		All		0.2	0.3	IV	$\Omega$
$R_{OUTD}$	Output Resistance (DC)	EL2071C Disabled	All	100	200		IV	k $\Omega$
$C_{OUTD}$	Output Capacitance (DC)	EL2071C Disabled	All		0.5	2.0	IV	pF
CMIR	Common-Mode Input Range	(Note 4)	25°C, $T_{MAX}$	$\pm 2.5$	$\pm 2.8$		IV	V
			$T_{MIN}$	$\pm 2$			IV	V
$I_{OUT}$	Output Current		25°C, $T_{MAX}$	50	70		II	mA
			$T_{MIN}$	35			III	mA
$V_{OUT}$	Output Voltage Swing	No Load	25°C, $T_{MAX}$	3.2	3.5		II	V
			$T_{MIN}$	3			II	V
$V_{OUTL}$	Output Voltage Swing	$R_L = 100\Omega$	25°C	3.2	3.4		I	V
$R_{OL}$	Transimpedance		25°C	250	1000		I	V/mA
$I_{LOGIC}$	Pin 8 Current @ +5V	EL2071C	All		500	750	II	$\mu A$
$V_{DIS}$	Minimum Pin 8 V to Disable	EL2071C	25°C	4.3			II	V
			$T_{MIN}$	4.0				
			$T_{MAX}$	4.6				
$V_{EN}$	Maximum Pin 8 V to Enable	EL2071C	All			0.7	II	V
$I_{DIS}$	Minimum Pin 8 I to Disable	EL2071C	All	750			II	$\mu A$
$I_{EN}$	Maximum Pin 8 I to Enable	EL2071C	All			35	II	$\mu A$

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### Closed Loop AC Electrical Characteristics

$V_S = \pm 5V$ ,  $R_F = 1.5\text{ k}\Omega$ ,  $A_V = +20$ ,  $R_L = 100\Omega$  unless otherwise specified

Parameter	Description	Test Conditions	Temp	Min	Typ	Max	Test Level	Units
FREQUENCY RESPONSE								
SSBW	−3 dB Bandwidth (V <sub>OUT</sub> < 2.0 V <sub>PP</sub> )		25°C	100	150		V	MHz
			T <sub>MIN</sub>	100		V	MHz	
			T <sub>MAX</sub>	70		V	MHz	
LSBW	−3 dB Bandwidth (V <sub>OUT</sub> < 5.0 V <sub>PP</sub> )		25°C, T <sub>MIN</sub>	65	100		IV	MHz
			T <sub>MAX</sub>	55		IV	MHz	
GAIN FLATNESS								
GFPL	Peaking V <sub>OUT</sub> < 2.0 V <sub>PP</sub>	< 25 MHz	25°C		0.0	0.1	V	dB
			T <sub>MIN</sub> , T <sub>MAX</sub>			0.1	V	dB
GFPH	Peaking V <sub>OUT</sub> < 2.0 V <sub>PP</sub>	> 25 MHz	25°C		0.0	0.2	V	dB
			T <sub>MIN</sub> , T <sub>MAX</sub>			0.2	V	dB
GFR	Rolloff V <sub>OUT</sub> < 2.0 V <sub>PP</sub>	< 50 MHz	25°C		0.2	1.0	V	dB
			T <sub>MIN</sub>			1.0	V	dB
			T <sub>MAX</sub>			1.3	V	dB
LPD	Linear Phase Deviation V <sub>OUT</sub> < 2.0 V <sub>PP</sub>	< 50 MHz	25°C, T <sub>MIN</sub>		0.2	1.0	IV	°
			T <sub>MAX</sub>			1.5	IV	°
TIME-DOMAIN RESPONSE								
t <sub>r1</sub> , t <sub>f1</sub>	Rise Time, Fall Time	2.0V Step	25°C, T <sub>MIN</sub>		2.5	3.5	IV	ns
			T <sub>MAX</sub>			5	IV	ns
t <sub>r2</sub> , t <sub>f2</sub>	Rise Time, Fall Time	5.0V Step	25°C, T <sub>MIN</sub>		5	7	IV	ns
			T <sub>MAX</sub>			8	IV	ns
t <sub>s</sub>	Settling Time to 0.1%	2.0V Step	All		10	15	IV	ns
OS	Overshoot	2.0V Step	All		0	10	IV	%
SR	Slew Rate		25°C, T <sub>MIN</sub>	800	1200		IV	V/μs
			T <sub>MAX</sub>	700			IV	V/μs
DISTORTION								
HD2	2nd Harmonic Distortion @20 MHz	2 V <sub>PP</sub>	25°C		−45	−35	V	dBc
			T <sub>MIN</sub> , T <sub>MAX</sub>			−35	V	dBc
HD3	3rd Harmonic Distortion @20 MHz	2 V <sub>PP</sub>	25°C		−60	−50	V	dBc
			T <sub>MIN</sub>			−50	V	dBc
			T <sub>MAX</sub>			−45	V	dBc

# ***EL2071C/EL2171C***

## ***150 MHz Current Feedback Amplifier***

### **Closed Loop AC Electrical Characteristics**

$V_S = \pm 5V$ ,  $R_F = 1.5\text{ k}\Omega$ ,  $A_V = +20$ ,  $R_L = 100\Omega$  unless otherwise specified — Contd.

Parameter	Description	Test Conditions	Temp	Min	Typ	Max	Test Level	Units
EQUIVALENT INPUT NOISE								
NF	Noise Floor > 100 kHz		25°C		−158	−155	IV	dBm (1 Hz)
			T <sub>MIN</sub>			−155	IV	dBm (1 Hz)
			T <sub>MAX</sub>			−154	IV	dBm (1 Hz)
INV	Integrated Noise 100 kHz to 200 MHz		25°C		35	50	IV	μV
			T <sub>MIN</sub>			50	IV	μV
			T <sub>MAX</sub>			55	IV	μV
DISABLE/ENABLE PERFORMANCE—EL2071C								
T <sub>OFF</sub>	V <sub>OUT</sub> = 2 V <sub>PP</sub> Disable Time to > 40 dB	20 MHz	All		70	200	IV	ns
T <sub>ON</sub>	Enable Time		All		40	100	IV	ns
ISO	Off Isolation	20 MHz	All	50	55		IV	dB

Note 1: Measured from T<sub>MIN</sub> to T<sub>MAX</sub>.

Note 2: PSRR is measured at  $V_S = \pm 4.5V$  and  $V_S = \pm 5.5V$ . Both supplies are changed simultaneously.


Note 3: Supply current when disabled is measured at the negative supply.

Note 4: Common-Mode Input Range for Rated Performance.

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### Typical Performance Curves


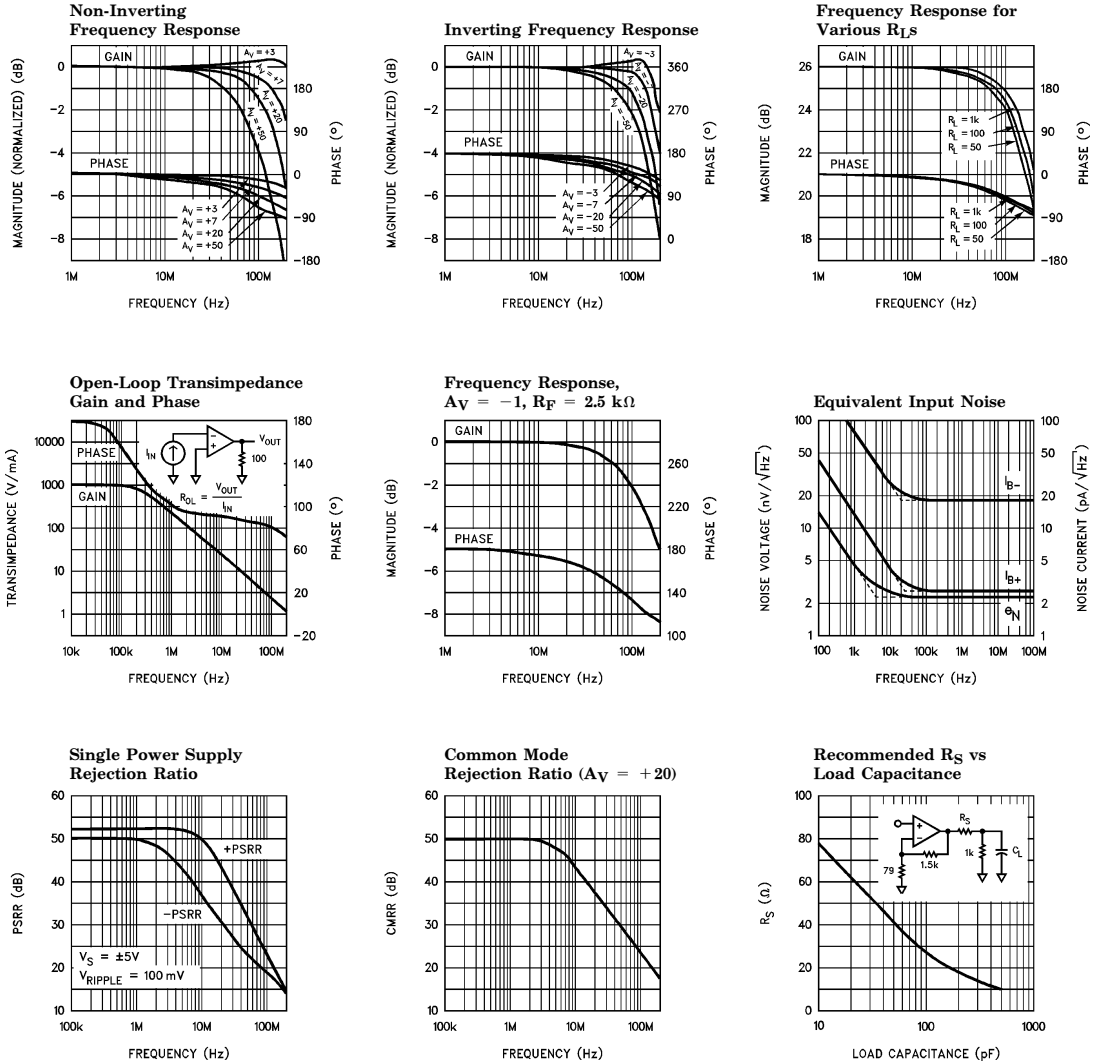


2071-3

# EL2071C/EL2171C


## 150 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

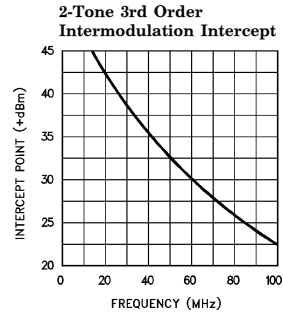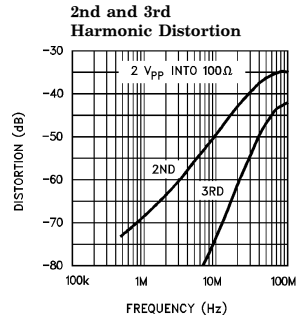


2071-4

### Pulse Response A<sub>V</sub> = +20

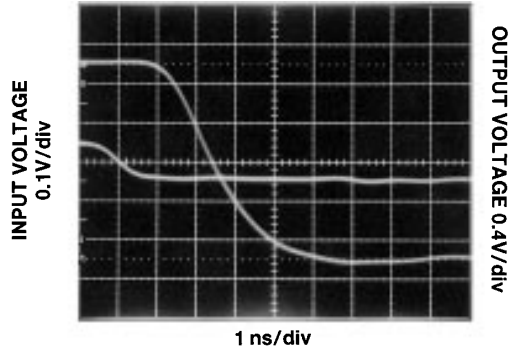

2071-5

### Pulse Response A<sub>V</sub> = +20

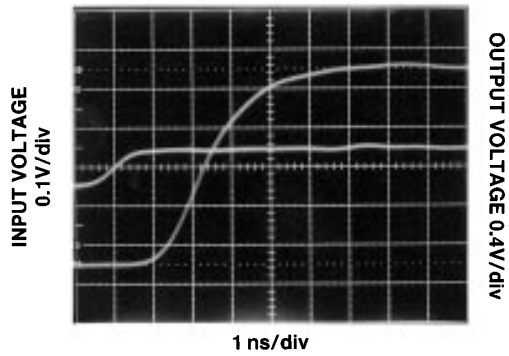


2071-6

# EL2071C/EL2171C


## 150 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

Forward and Reverse Gain during Disable—EL2071C

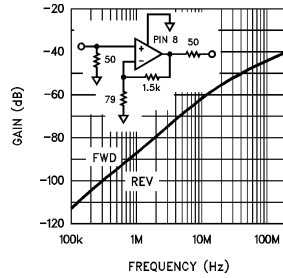


Disabled Attenuation vs Time for Various Output Levels—EL2071C

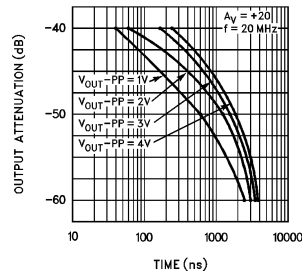


2071-7

Disable Response—EL2071C

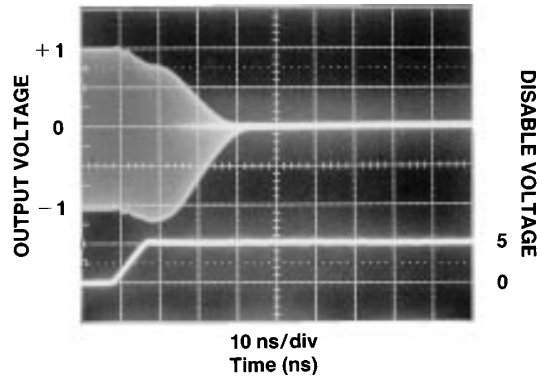

2071-8

Enable Response—EL2071C

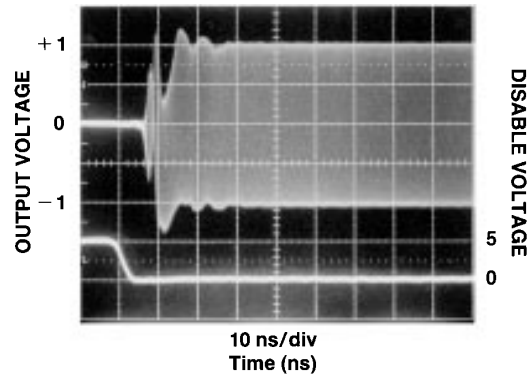


2071-9


# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### Typical Performance Curves — Contd.

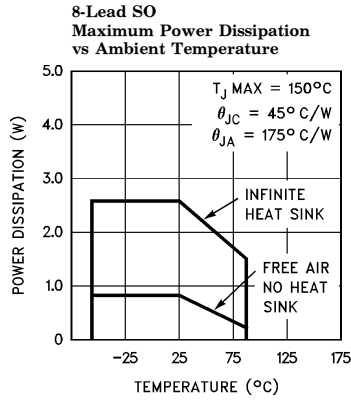


2071-10

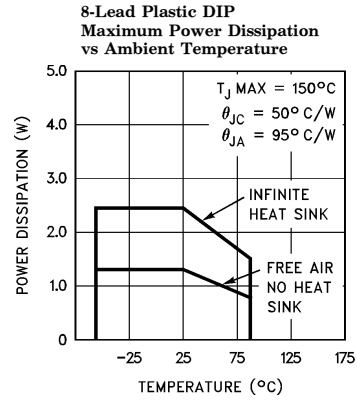

2071-11

### Equivalent Circuit

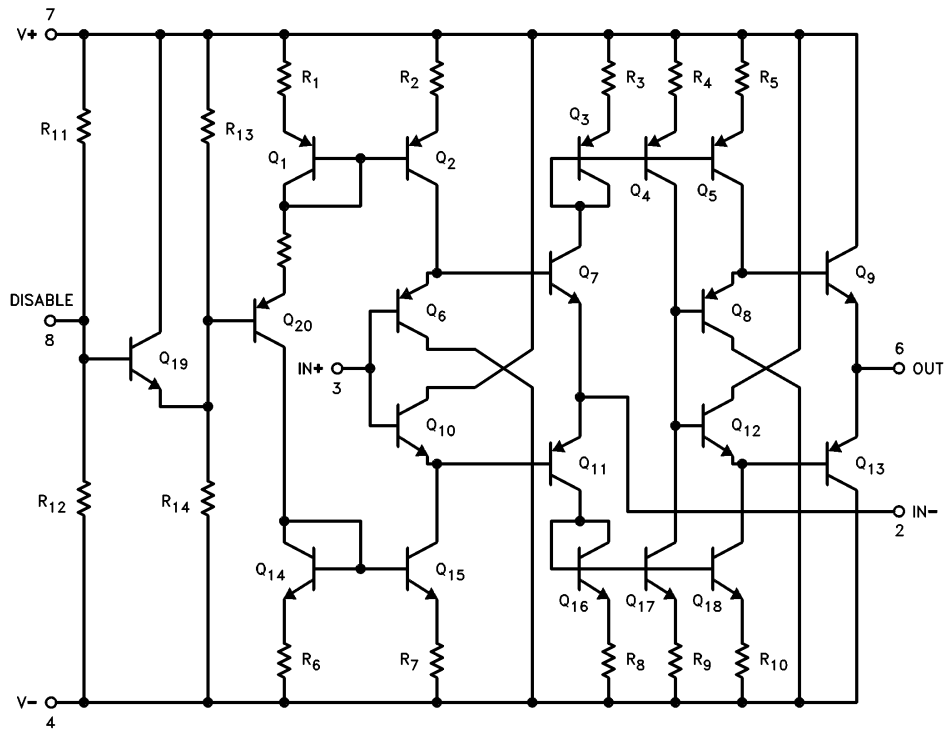


2071-13

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### Burn-In Circuit

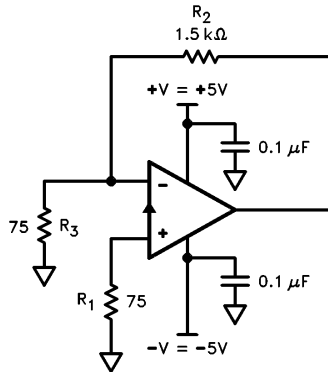

2071-14

ALL PACKAGES USE THE SAME SCHEMATIC.

### Applications Information

#### Theory of Operation

The EL2071/EL2171 have a unity gain buffer from the non-inverting input to the inverting input. The error signal of the EL2071/EL2171 is a current flowing into (or out of) the inverting input. A very small change in current flowing through the inverting input will cause a large change in the output voltage. This current amplification is called the transimpedance ( $R_{OL}$ ) of the EL2071/EL2171 [ $V_{OUT} = (R_{OL}) * (-I_{IN})$ ]. Since  $R_{OL}$  is very large, the current flowing into the inverting input in the steady-state (non-slewing) condition is very small.

Therefore we can still use op-amp assumptions as a first-order approximation for circuit analysis, namely that:

1. The voltage across the inputs is approximately 0V.
2. The current into the inputs is approximately 0 mA.

### Resistor Value Selection and Optimization

The value of the feedback resistor (and an internal capacitor) sets the AC dynamics of the EL2071/EL2171. The nominal value for the feedback resistor is 1.5 k $\Omega$ , which is the value used for production testing. This value guarantees stability. For a given closed-loop gain the bandwidth may be increased by decreasing the feedback resistor and, conversely, the bandwidth may be decreased by increasing the feedback resistor.

Reducing the feedback resistor too much will result in overshoot and ringing, and eventually oscillations. Increasing the feedback resistor results in a lower -3 dB frequency. Attenuation at high frequency is limited by a zero in the closed-loop transfer function which results from stray capacitance between the inverting input and ground. Consequently, it is very important to keep stray capacitance to a minimum at the inverting input.

### Capacitive Feedback

The EL2071/EL2171 rely on their feedback resistor for proper compensation. A reduction of the impedance of the feedback element results in less stability, eventually resulting in oscillation. Therefore, circuit implementations which have capacitive feedback should not be used because of the capacitor's impedance reduction with frequency. Similarly, oscillations can occur when using the technique of placing a capacitor in parallel with the feedback resistor to compensate for shunt capacitances from the inverting input to ground.

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### Applications Information — Contd.

#### Printed Circuit Layout

As with any high frequency device, good PCB layout is necessary for optimum performance. Ground plane construction is a requirement, as is good power-supply bypassing close to the package. The inverting input is sensitive to stray capacitance, therefore connections at the inverting input should be minimal, close to the package, and constructed with as little coupling to the ground plane as possible.

Capacitance at the output node will reduce stability, eventually resulting in peaking, and finally oscillation if the capacitance is large enough. The design of the EL2071/EL2171 allow a larger capacitive load than comparable products, yet there are occasions when a series resistor before the capacitance may be needed. Please refer to the graphs to determine the proper resistor value needed.


#### Disable/Enable Operation for EL2071C

The EL2071C has a disable/enable control input at pin 8. The device is enabled and operates normally when pin 8 is left open or returned to ground. When the voltage at pin 8 is brought to within 0.4V of pin 7 ( $V_S+$ ), the EL2071C is disabled. The output becomes a high impedance, the inverting input is no longer driven to the positive input voltage, and the supply current is reduced to less than 2.2. mA. There are internal resistors which limit the current at pin 8 to a safe level ( $\sim \pm 500 \mu A$ ) if pin 8 is shorted to either supply.

Typically, analog and digital circuits should have separate power supplies. This usually leads to

slight differences between the power supply voltages. The EL2071C's disable feature is dependent on the voltage at pins 8 and 7. Therefore, to operate the disable feature of the EL2071C dependably over temperature, it is recommended that the logic circuitry which drives pin 8 of the EL2071C operate from the same +5V supply as the EL2071C to avoid voltage differences between the digital and analog power supplies. Since  $V_{DIS}$  is temperature dependent, it is recommended that 5V CMOS logic (with a  $V_{OH} > 4.6V$  sourcing  $> 750 \mu A$  over temperature) be used to drive the disable pin of the EL2071C.

When disabled, (as well as in enabled mode), care must be taken to prevent a differential voltage between the + and - inputs greater than 5.0V. For example, in the figure below, the EL2071C is connected in a gain of +7 configuration and is disabled while the analog bus is driven externally to +5V. Pin 2 is consequently at +0.71V, and if  $V_{IN}$  is driven to -5V, then 5.71V appears between pins 3 and 2. Internally, this voltage appears across a forward biased  $V_{BE}$  in series with a reverse biased  $V_{BE}$  and is past the threshold for zenering the reverse biased  $V_{BE}$ . In a typical application, a 50 $\Omega$  or 75 $\Omega$  terminating resistor from pin 3 to ground will prevent pin 3 from approaching -5V.

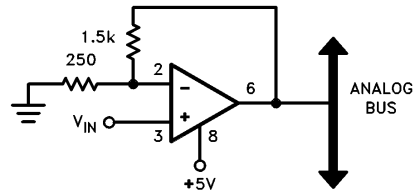

2071-15

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier


### Applications Information — Contd.

#### Using the EL2071C as a Multiplexer

An interesting use of the enable feature is to combine several amplifiers in parallel with their outputs in common. This combination then acts similar to a MUX in front of an amplifier. A typical circuit is shown. The series resistance at each output helps to further increase isolation between amplifiers.

When the EL2071C is disabled, the DC output impedance is  $>100\text{ k}\Omega$  in parallel with  $2\text{ pF}$  capacitance.

To operate properly, the decoder that is used must have a  $V_{OH} > (V_S +) - 0.4\text{V}$  with  $I_{OH} = 750\text{ }\mu\text{A}$ , and should be connected to the same power supply as the EL2071C.

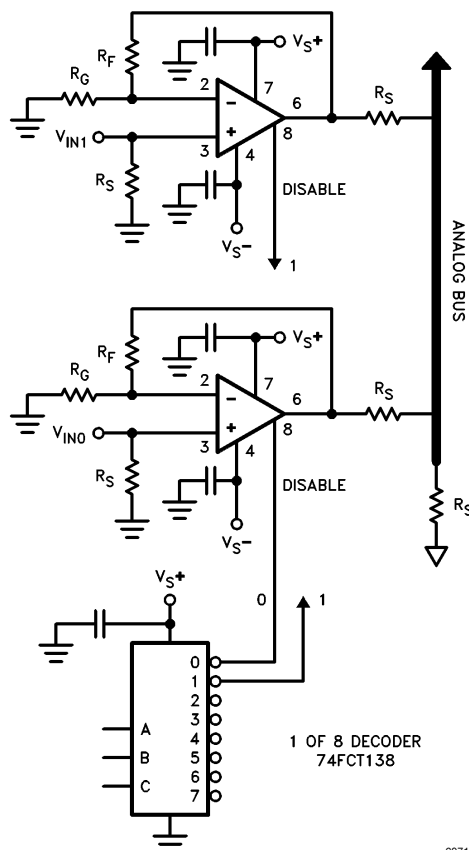

2071-16

# EL2071C/EL2171C

## 150 MHz Current Feedback Amplifier

### EL2071 Macromodel

```

* Revision A. March 1992
* Enhancements include PSRR, CMRR, and Slew Rate Limiting
* Connections:      + input
*                   |
*                   |      - input
*                   |      |
*                   |      |      + Vsupply
*                   |      |      |
*                   |      |      |      - Vsupply
*                   |      |      |      |
*                   |      |      |      |      output
*                   |      |      |      |
.subckt M2071      3      2      7      4      6
*
* Input Stage
*
e1 10 0 3 0 1.0
vis 10 9 0V
h2 9 12 vxx 1.0
r1 2 11 2
l1 11 12 1nH
iinp 3 0 10μA
iinm 2 0 10μA
*
* Slew Rate Limiting
*
*h1 13 0 vis 1K
h1 13 0 vis 600
r2 13 14 100
d1 14 0 dclamp
d2 0 14 dclamp
*
* High Frequency Pole
*
*e2 30 0 14 0 0.001666666666
e2 30 0 14 0 0.001
l3 30 17 1.0μH
c5 17 0 0.1pF
r5 17 0 500
*
* Transimpedance Stage
*
g1 0 18 17 0 1.0
rol 18 0 1Meg
cdp 18 0 0.88pF
*
* Output Stage
*
q1 4 18 19 qp
q2 7 18 20 qn
q3 7 19 21 qn
q4 4 20 22 qp
r7 21 6 2
r8 22 6 2

```

# ***EL2071C/EL2171C***


## ***150 MHz Current Feedback Amplifier***

### **EL2071 Macromodel — Contd.**

```
ios1 7 19 2.5mA
ios2 20 4 2.5mA
*
* Supply Current
*
ips 7 4 9mA
*
* Error Terms
*
ivos 0 23 3mA
vxx 23 0 0V
e4 24 0 3 0 1.0
e5 25 0 7 0 1.0
e6 26 0 4 0 1.0
r9 24 23 316
r10 25 23 562
r11 26 23 562
*
* Models
*
.model qn npn (is = 5e-15 bf = 500 tf = 0.05nS)
.model qp pnp (is = 5e-15 bf = 500 tf = 0.05nS)
.model dclamp d(is = 1e-30 ibv = 1pA bv = 3.5 n = 4)
.ends
```

# ***EL2071C/EL2171C*** ***150 MHz Current Feedback Amplifier***

## **EL2071 Macromodel**

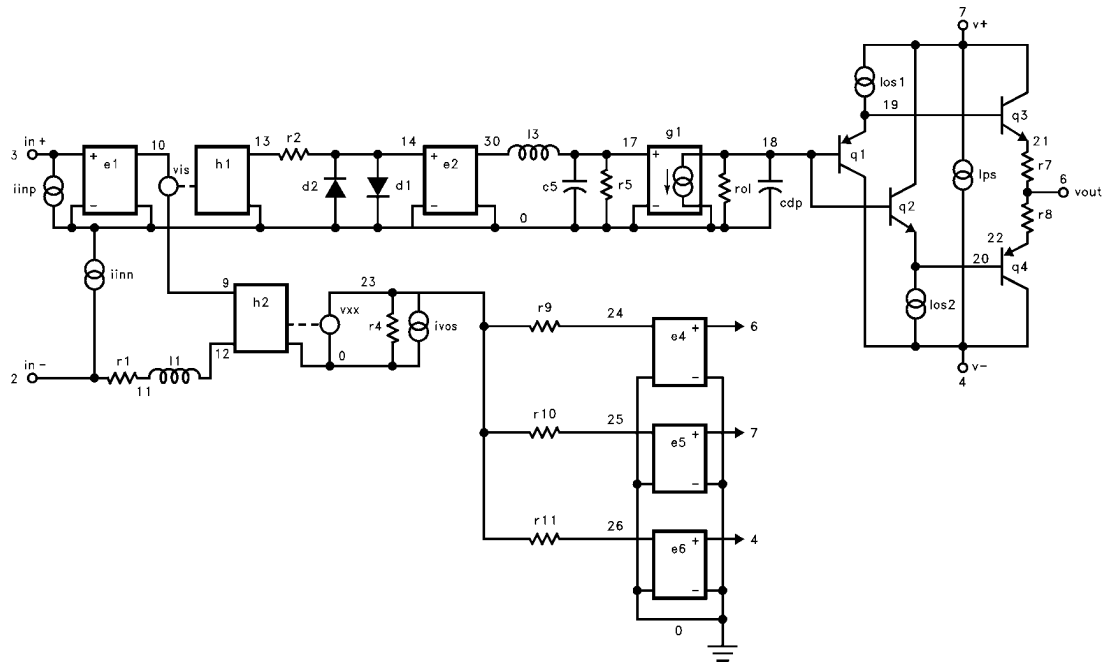

2071-17

# ***EL2071C/EL2171C***

## ***150 MHz Current Feedback Amplifier***

### **General Disclaimer**

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.



### **Elantec, Inc.**

1996 Tarob Court

Milpitas, CA 95035

Telephone: (408) 945-1323

(800) 333-6314

Fax: (408) 945-9305

European Office: 44-71-482-4596

### **WARNING — Life Support Policy**

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.