

E2726



Endicott Research Group, Inc.
2601 Wayne St., Endicott NY 13760
607-754-9187



Endicott Research Group, Inc.
2601 Wayne St., Endicott NY 13760
607-754-9187 Fax 607-754-9255
<http://www.ergpower.com>

Specifications and Applications Information

05/13/02


Preliminary

The ERG E2726 (E200II Series) dc to ac inverter is specifically designed to power the Hitachi SX16H005 LCD display module to a moderate brightness level from a +12 volt dc source.

The E2726's small size, encapsulated package makes it the ideal power source for applications where small size, high efficiency and reliability are critical.

This inverter is designed to satisfy the most common cold-cathode lighting requirements for the Hitachi SX16H005 display. Custom units, providing different inputs, outputs or package refinements are available.


Connection Diagram

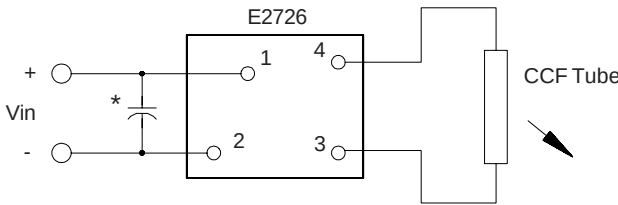

* Input bypass capacitor may be required (10uf - 100uf)



E2726

Single Tube DC to AC Inverter



E200 Package

Package Configuration

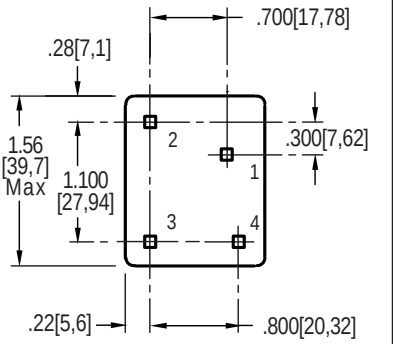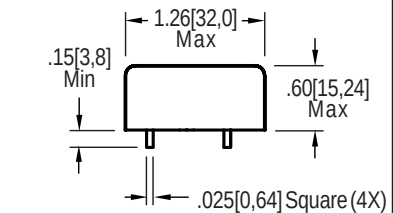

- 1. Vin(+)
- 2. Vin(-)
- 3. Vout(AC)
- 4. Vout(AC)



Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage Range	Vin	-0.3 to +13.2	Vdc
Operating Temperature	To	-0 to +70	°C
Storage Temperature	Tstg	-40 to +85	°C

Recommended Operating Conditions

Rating	Symbol	Value	Units
Input Voltage	Vin	+6 to 13.2	Vdc

Electrical Characteristics

Unless otherwise noted Vin = 12.00 Volts dc and Ta = 25°C

Characteristic	Symbol	Min	Typ	Max	Units
Input Current	lin	-	.103	.120	Adc
Operating Frequency	Fo	27	32	37	KHz
Minimum Output Voltage	Vout (min)	1400	-	-	Vrms
Efficiency (note 1)	h	-	89	-	%
Output Current	lout	-	3	-	marms
Output Voltage (When powering a Hitachi SX16H005 display)	Vout	-	560	-	Vrms

After tube has be allowed to warm-up for 5 minutes Specifications subject to change without notice.





Note 1: Efficiency was calculated using an output voltage of 365 Vrms.

Note 2: Inverter to display high voltage wire length must be short to minimize stray capacitance gains and losses.



Endicott Research Group, Inc.

Typical Performance Curves

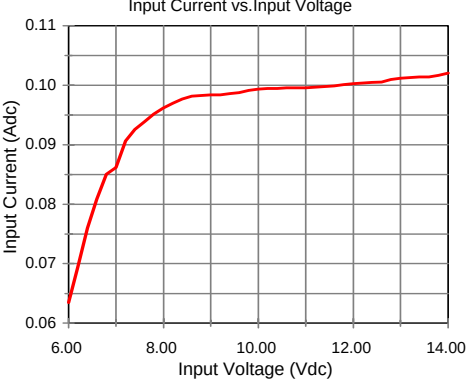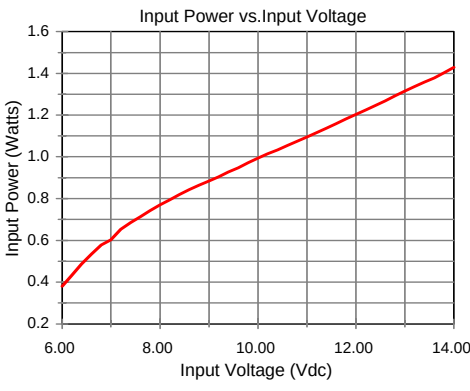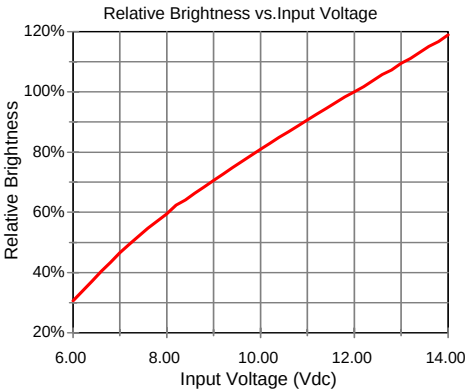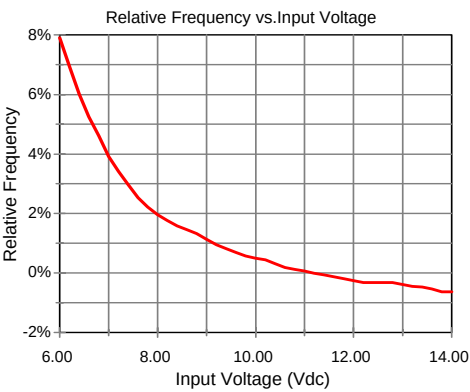

Endicott Research Group, Inc.