

Features

- Fast response time—20 ns
- Wide input differential voltage range—24V to $\pm 15V$ supplies
- Precision input stage— $V_{OS} = 1 \text{ mV}$
- Low input bias current— $I_B = 100 \text{ nA}$
- Low input offset current— $I_{OS} = 30 \text{ nA}$
- $\pm 4.5V$ to $\pm 18V$ supplies
- 3-State TTL and CMOS compatible output
- No supply current glitch during switching
- High voltage gain—40 V/mV
- 50% power reduction in shutdown mode
- Input and latch remain active in shutdown mode
- P/N compatible with industry standard comparators

Applications

- Analog to digital converters
- ATE pin receiver
- Precision crystal oscillators
- Zero crossing detector
- Window detector
- Pulse width modulation generator
- "Go/no-go" detector

Ordering Information


Part No.	Temp. Range	Pkg.	Outline #
EL2018CN	-40°C to $+85^\circ\text{C}$	P-DIP	MDP0031

General Description

The EL2018 represents a quantum leap forward in comparator speed, accuracy and functionality. Manufactured with Elantec's proprietary Complementary Bipolar process, this device uses fast PNP and NPN transistors in the signal path. A unique circuit design gives the inputs the ability to handle large common mode and differential mode signals, yet retain high speed and excellent accuracy. Careful design of the front end insures the part maintains speed and accuracy when operating with a mix of small and large signals. The three-state output stage is designed to be TTL compatible for any power supply combination, yet it draws a constant current and does not generate glitches. When the output is disabled, the supply current consumption drops by 50%, but the input stage and latch remain active.

Elantec facilities comply with MIL-I-45208A and other applicable quality specifications. For information on Elantec's processing, see QRA1: *Elantec's Processing-Monolithic Products*.

Connection Diagram



2018-2

Note: All information contained in this data sheet has been carefully checked and is believed to be accurate as of the date of publication; however, this data sheet cannot be a "controlled document". Current revisions, if any, to these specifications are maintained at the factory and are available upon your request. We recommend checking the revision level before finalization of your design documentation.

CMS # 2018DS

EL2018C

Fast, High Voltage Comparator with Transparent Latch

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

V_S	Supply Voltage	$\pm 18\text{V}$	I_{OP}	Peak Output Current	50 mA
V_{IN}	Input Voltage	$+V_S$ to $-V_S$	I_O	Continuous Output Current	25 mA
ΔV_{IN}	Differential Input Voltage	Limited only by Power Supplies	T_A	Operating Temperature Range	-40°C to $+85^\circ\text{C}$
I_{IN}	Input Current (Pins 1, 2 or 3)	$\pm 10\text{ mA}$	T_J	Operating Junction Temperature Plastic DIP Package	150°C
I_{INS}	Input Current (Pins 5 or 6)	$\pm 5\text{ mA}$	T_{ST}	Storage Temperature	-65°C to $+150^\circ\text{C}$
P_D	Maximum Power Dissipation (Note 4—See Curves)	1.25W			

Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore $T_J = T_C = T_A$.

Test Level Test Procedure

I	100% production tested and QA sample tested per QA test plan QCX0002.
II	100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$, T_{MAX} and T_{MIN} per QA test plan QCX0002.
III	QA sample tested per QA test plan QCX0002.
IV	Parameter is guaranteed (but not tested) by Design and Characterization Data.
V	Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.

DC Electrical Characteristics $V_S = \pm 15\text{V}$ unless otherwise specified

Parameter	Description	Temp	Min	Typ	Max	Test Level	Units
V_{OS}	Input Offset Voltage (Note 1) $V_{CM} = 0\text{V}$, $V_O = 1.4\text{V}$	25°C		1.0	5	I	mV
		T_{MIN} , T_{MAX}			7	III	mV
I_B	Input Bias Current $V_{CM} = 0\text{V}$, Pin 2 or 3	25°C		100	400	I	nA
		T_{MIN} , T_{MAX}			600	III	nA
I_{OS}	Input Offset Current $V_{CM} = 0\text{V}$	25°C		30	150	I	nA
		T_{MIN} , T_{MAX}			250	III	nA
CMRR	Common Mode Rejection Ratio (Note 2)	25°C	85	105		I	dB
		T_{MIN} , T_{MAX}	80			III	dB
PSRR	Power Supply Rejection Ratio (Note 3)	25°C	85	100		I	dB
		T_{MIN} , T_{MAX}	77			III	dB
V_{CM}	Common Mode Input Range	25°C	± 12	± 13		I	V
		T_{MIN} , T_{MAX}	± 12			III	V
A_V	Voltage Gain $V_{OUT} = 0.8\text{V}$ to 2.0V	25°C	15	40		I	V/mV
		T_{MIN} , T_{MAX}	10			III	V/mV
V_{OL}	Output Voltage Logic Low $I_{OL} = 0\text{ mA}$ to 8 mA	25°C	-0.05	0.15	0.4	I	V
		T_{MIN} , T_{MAX}	-0.1		0.4	III	V

EL2018C

Fast, High Voltage Comparator with Transparent Latch

DC Electrical Characteristics $V_S = \pm 15V$ unless otherwise specified — Contd.

Parameter	Description	Temp	Min	Typ	Max	Test Level	Units
V_{oh}	Output Voltage Logic High $V_S = \pm 15V$ $V_S = \pm 15V$ $V_S = \pm 5V$ $V_S = \pm 5V$ $V_S = \pm 5V$	25°C	3.5	4.0	4.65	I	V
		T_{MIN}, T_{MAX}	3.5		4.65	III	V
		25°C	2.4			I	V
		T_{MIN}	2.4			III	V
		T_{MAX}	2.4			III	V
V_{odis1}	V_{OUT} Range, Disabled, $I_{OL} = -1\text{ mA}$ $V_S = \pm 15V$ $V_S = \pm 15V$ $V_S = \pm 5V$	25°C	4.65			I	V
		T_{MIN}, T_{MAX}	4.65			II	V
		25°C		3.5		V	V
V_{odis2}	V_{OUT} Range, Disabled, $I_{OL} = 1\text{ mA}$ $V_S = \pm 5V$ to $\pm 15V$	ALL	-0.3	-1		II	V
V_{inh}	LE or \overline{CS} Inputs Logic High Input Voltage	25°C	2.0			I	V
		T_{MIN}, T_{MAX}	2.2			III	V
V_{inl}	LE or \overline{CS} Inputs Logic Low Input Voltage	25°C			0.8	I	V
		T_{MIN}, T_{MAX}			0.8	III	V
I_{in}	LE or \overline{CS} Inputs Logic Input Current $V_{IN} = 0V$ to $5V$	25°C			± 200	I	μA
		T_{MIN}, T_{MAX}			± 300	III	μA
I_{s+en}	Positive Supply Current Enabled	25°C		8.4	12	I	mA
		T_{MIN}, T_{MAX}			13	III	mA
I_{s+dis}	Positive Supply Current Disabled	25°C		4.7	6	I	mA
		T_{MIN}, T_{MAX}			7	III	mA
I_{s-en}	Negative Supply Current Enabled	25°C		13.0	17	I	mA
		T_{MIN}, T_{MAX}			18	III	mA
I_{s-dis}	Negative Supply Current Disabled	25°C		5.0	6.5	I	mA
		T_{MIN}, T_{MAX}			6.5	III	mA

EL2018C

Fast, High Voltage Comparator with Transparent Latch

AC Electrical Characteristics $V_S = \pm 15V$, $T_A = 25^\circ C$

Parameter	Description	Min	Typ	Max	Test Level	Units
T_{pd}	Propagation Delay, 5 mV Overdrive		20	40	III	ns
T_s	Setup Time		6	12	IV	ns
T_h	Hold Time		-2	0	IV	ns
T_{un}	Unlatch Time		23	40	IV	ns
T_{mpw}	Minimum Clock Pulse Width		12		V	ns
T_{en}	Output 3-State Enable Delay		40	70	IV	ns
T_{dis}	Output 3-State Disable Delay		150	300	IV	ns







Note 1: $V_{OUT} = 1.4V$.

Note 2: $V_{CM} = 12V$ to $-12V$.

Note 3: $V_S = \pm 5V$ to $\pm 15V$.

Note 4: The maximum power dissipation depends on package type, ambient temperature and heat sinking. See the Typical Performance curves for more details.

Typical AC Performance Curves









2018-3

EL2018C

Fast, High Voltage Comparator with Transparent Latch

Typical AC Performance Curves — Contd.

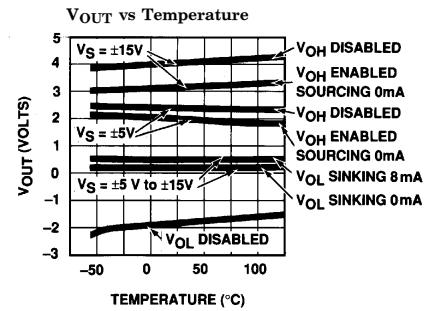






2018-4

EL2018C

Fast, High Voltage Comparator with Transparent Latch

Typical Performance Curves — Contd.




2018-5

EL2018C

Fast, High Voltage Comparator with Transparent Latch

Block Diagram

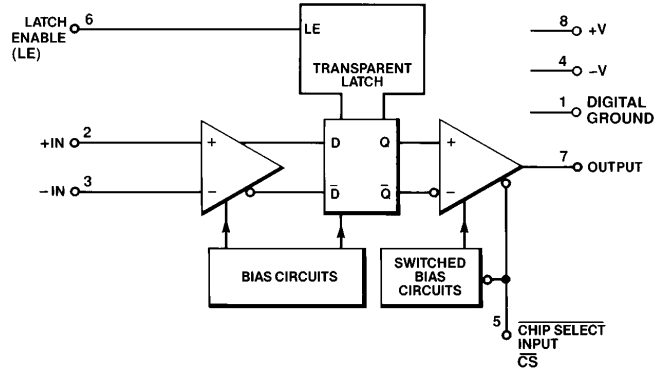

Function Table

Inputs (time n - 1)				Internal Q	Notes	Output
+IN	-IN	$\overline{\text{CS}}$	LE			
+	-	L	L	H	Normal Comparator Operation	H
-	+	L	L	L		L
+	-	H	L	H	Internal Normal Comparator Operation Output Power Down Mode	High Z
-	+	H	L	L		High Z
X	X	L	H	Q_{n-1}	Data Retained in Latch	Q_{n-1}
X	X	H	H	Q_{n-1}	Data Retained in Latch Power Down Mode	High Z

Application Hints

Device Overview

The EL2018 is the first comparator of its kind. It is capable of 24V differential signals, yet has excellent accuracy, linearity and voltage gain. It even has a 3-state output feature that reduces the power supply currents 50% when the output is disabled, yet the input stage and latch remain active. This extremely fast and accurate device is built with the proprietary Elantec Complementary Bipolar Dielectric Isolation Process, which is immune to power sequencing and latch up problems.

Power Supplies

The EL2018 will work with $\pm 5\text{V}$ to $\pm 18\text{V}$ supplies or any combination between (Example $+12\text{V}$ and -5V). The supplies should be well by-

passed with good high frequency capacitors ($0.1\ \mu\text{F}$ monolithic ceramic recommended) close to the power supply leads. Good ground plane construction techniques enhance stability, and the lead from pin 1 to ground should be short.

Front End

The EL2018 uses schottky diodes to make a "bullet proof" front end with very low input bias currents, even if the two inputs are tied to very large differential voltages ($\pm 24\text{V}$). The transfer function of the EL2018 is linear, and the output is stable when in the linear region.

The large common mode range ($\pm 12\text{V}$ minimum) and differential voltage handling ability ($\pm 24\text{V}$ min.) of the device make it useful in ATE applications without the need for an input attenuator with its associated delay.

EL2018C

Fast, High Voltage Comparator with Transparent Latch

Application Hints — Contd.

Recovery from Large Overdrives

Timing accuracy is excellent for all signals within the common mode range of the device ($\pm 12\text{V}$ with $\pm 15\text{V}$ supply). When the common mode range is exceeded the input stage will saturate, input bias currents increase and it may take as much as 200 ns for the device to recover to normal operation after the inputs are returned to the common mode range. If signals greater than the common mode range of the device are anticipated, the inputs should be diode clamped to remain within the common mode range of the device.

Input Slew Rate

All comparators have input slew rate limitations. The EL2018 operates normally with any input slew rate up to $300\text{ V}/\mu\text{s}$. Input signal slew rates over $300\text{ V}/\mu\text{s}$ induce offset voltages of 5 mV to 20 mV. This induced offset voltage settles out in about 20 ns, 20 times faster than previous high voltage comparators.

Latch

The EL2018 contains a “transparent” latch. A “transparent” latch acts as an amplifier when the LE input is low and it “latches” and holds the value it had just before the LE transition from low to high.

It is possible to make an oscillation resistant design by putting a short duration “0” on the LE input whenever you wish to make a comparison. This gates the comparator on only for a brief instant, long enough to compare, but not long enough to oscillate. The minimum duration of this pulse is specified by the minimum clock width parameter in the AC electrical tables.

The $\overline{\text{CS}}$ input may be left floating and still produce a guaranteed logic “0” input (active). Floating the LE input will normally produce a logic “0” input also, but operation is not guaranteed.

Proper RF technique suggests that these inputs be grounded or pulled to ground if they are not used.

Output Stage

The output stage of the EL2018 is a pair of complementary emitter followers operating as a linear amplifier. This makes the output stage of the EL2018 glitch free, and improves accuracy and stability when operating with small signals.

3-State Output, Power Saving Feature

The EL2018 has an output stage which can be put into a high impedance “3-state” mode. When it is in this mode, the input stage and latch remain active, yet the device dissipates only 50% of the power used when the output is active. This has advantages in a large ATE system where there may be 1000 comparators, but only 10% are in use at any one time.

Due to the power saving feature and linear output stage, the EL2018 does not have a standard TTL 3-state output stage. As such one must be careful when using the 3-state feature with devices other than other EL2018's or EL2019's. When operating from $\pm 15\text{V}$ supplies the 3-state feature is compatible with all TTL families, however CMOS families may conflict on high outputs. Since the output stage of the EL2018 turns on faster than it turns off, a 50Ω to 100Ω resistor in series with the output will limit fault currents between devices with minimum impact on logic drive capability.

System Design Considerations

The most common problem users have with high speed comparators is oscillations due to output to input feedback. This can be avoided by using a ground plane, proper supply bypassing, and routing the inputs and outputs away from each other. Since the EL2018 has a gain bandwidth product of about 40 GHz, layout and bypassing are important to a successful system design. A unique alternative to the EL2018 is the EL2019, with its edge triggered master/slave flip flop.

Device Functions


The various operating states of the EL2018 are described in the function table on page 7.

EL2018C

Fast, High Voltage Comparator with Transparent Latch


Typical Applications

**Using the Power Down/
3-State Feature**

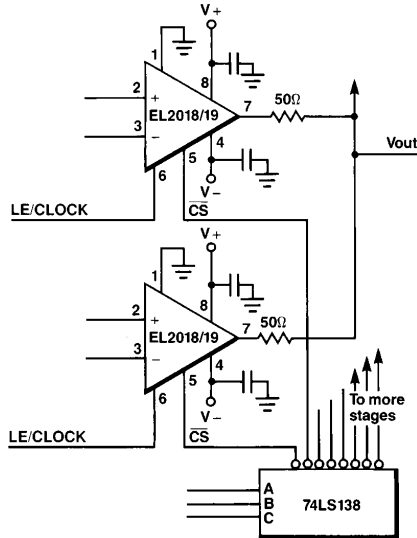


2018-7

**Series Resonant
Crystal Oscillator**

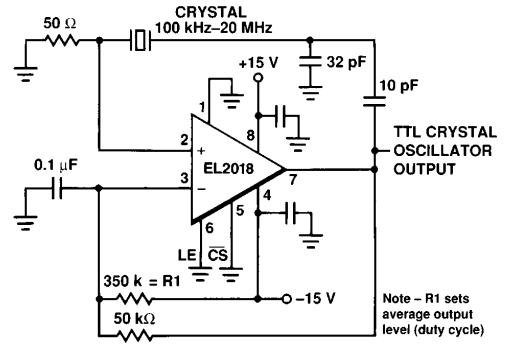


2018-8

**Using the EL2018 in the
Transparent Mode
(Latch Not Used)**



2018-9

A Wide Input Range Window Comparator

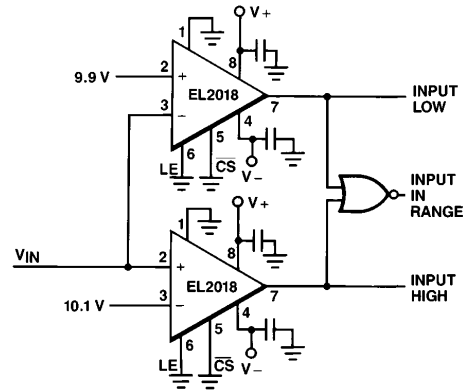


V_{IN} Range +12V to -12V
with $V_S = \pm 15V$

2018-10

EL2018C


Fast, High Voltage Comparator with Transparent Latch

Equivalent Schematic

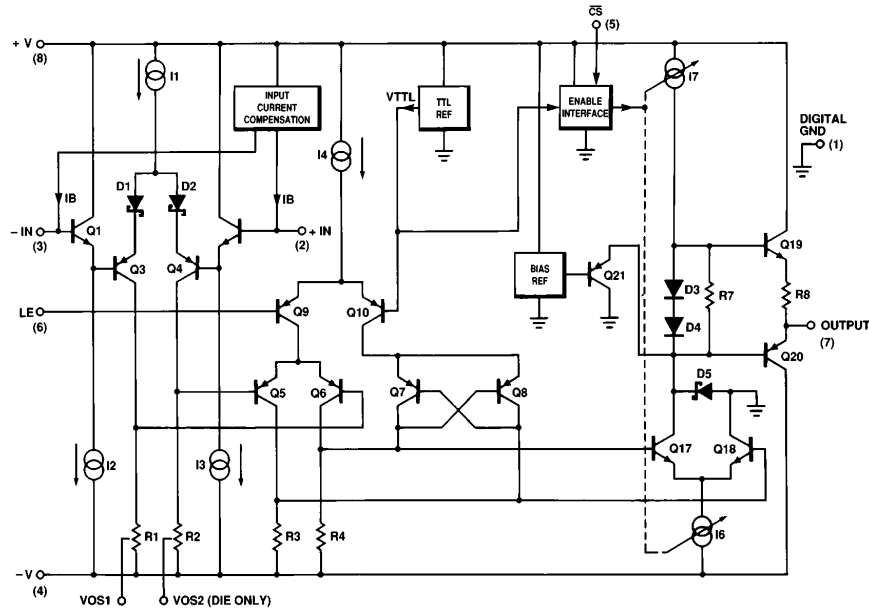

2018-11

Burn-In Circuit

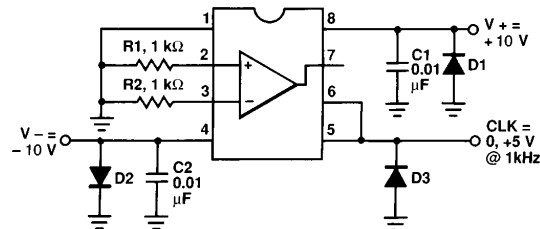

2018-12

Pin numbers are for DIP packages.
All packages use the same schematic.

EL2018C

Fast, High Voltage Comparator with Transparent Latch

EL2018 Macromodel

```

* Connections:      + input
*                  |
*                  | - input
*                  |
*                  | + V
*                  |
*                  | - V
*                  |
*                  |  $\overline{LE}$ 
*                  |
*                  |  $\overline{CS}$ 
*                  |
*                  | output
*
.subckt M2018      2      3      8      4      6      5      7
*
* Input Stage
*
i1 8 10 700 $\mu$ A
r1 13 4 1K
r2 14 4 1K
q1 8 3 11 qn
q2 8 2 12 qn
q3 13 11 10 qp
q4 14 12 10 qp
i2 11 4 200 $\mu$ A
i3 12 4 200 $\mu$ A
*
* 2nd Stage & Flip Flop
*
*i4 8 24 700 $\mu$ A
i4 8 24 1mA
q9 22 6 24 qp
q10 18 17 24 qp
v1 17 0 2.5V
q5 15 14 22 qp
q6 16 13 22 qp
r3 15 4 1K
r4 16 4 1K
q7 16 15 18 qp
q8 15 16 18 qp
*
* Output Stage
*
i7 8 35 2mA
s1 35 20 5 0 sw
d2 35 8 ds
i6 26 34 5mA
s2 34 4 5 0 sw
d3 34 26 ds
q19 8 20 21 qn 2
q20 4 19 7 qp 2
r8 21 7 60
r7 20 19 4K
q17 19 16 26 qn 5
q18 0 15 26 qn 5
q22 20 20 30 qn 5

```

EL2018C

Fast, High Voltage Comparator with Transparent Latch

EL2018 Macromodel — Contd.

```

q23 19 19 30 qn 8
d1 0 19 ds
q21 0 17 19 qp
*
* Power Supply Current
*
ips 8 4 4mA
*
* Models
*
.model qn npn (is = 2e-15 bf = 400 tf = 0.05nS cje = 0.3pF cjc = 0.2pF ccs = 0.2pF)
.model qp pnp (is = 0.6e-15 bf = 60 tf = 0.3nS cje = 0.5pF cjc = 0.5pF ccs = 0.4pF)
.model ds d(is = 2e-12 tt = 0.05nS eg = 0.62V vj = 0.58)
.model sw vswitch (von = 0.4V voff = 2.5V)
.ends

```

General Disclaimer

Specifications contained in this data sheet are in effect as of the publication date shown. Elantec, Inc. reserves the right to make changes in the circuitry or specifications contained herein at any time without notice. Elantec, Inc. assumes no responsibility for the use of any circuits described herein and makes no representations that they are free from patent infringement.

élan**tec**
HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

Elantec, Inc.

1996 Tarob Court

Milpitas, CA 95035

Telephone: (408) 945-1323

(800) 333-6314

Fax: (408) 945-9305

European Office: 44-71-482-4596

WARNING — Life Support Policy

Elantec, Inc. products are not authorized for and should not be used within Life Support Systems without the specific written consent of Elantec, Inc. Life Support systems are equipment intended to support or sustain life and whose failure to perform when properly used in accordance with instructions provided can be reasonably expected to result in significant personal injury or death. Users contemplating application of Elantec, Inc. products in Life Support Systems are requested to contact Elantec, Inc. factory headquarters to establish suitable terms & conditions for these applications. Elantec, Inc.'s warranty is limited to replacement of defective components and does not cover injury to persons or property or other consequential damages.