

## Series PVR33

Microelectronic Power IC  
BOSFET® Photovoltaic Relay  
Dual-Pole, 180mA, 0-300V AC/DC

### General Description

The PVR33 Photovoltaic Relay is a dual-pole, normally open solid state replacement for electro-mechanical relays. It utilizes as an output switch a unique bidirectional (AC or DC) MOSFET power IC termed a BOSFET. The BOSFET is controlled by a photovoltaic generator of novel construction, which is energized by radiation from a dielectrically isolated light emitting diode (LED).

The PVR overcomes the limitations of reed relays by offering the solid state advantages of long life, high operating speed, low pick-up power, bounce-free operation, low thermal voltages and miniaturization. These advantages allow product improvement and design innovations in many applications such as process control, multiplexing, telecommunications, automatic test equipment and data acquisition.

The PVR can switch analog signals from thermocouple level to 300 volts peak AC or DC polarity. Signal frequencies into the RF range are easily controlled and switching rates up to 5kHz are achievable. The extremely small thermally generated offset voltages allow increased measurement accuracies.


Unique silicon technology developed by International Rectifier forms the heart of the PVR. The monolithic BOSFET contains a bidirectional N-channel power MOSFET output structure. In addition, this power IC chip has input circuitry for fast turn-off and gate protection functions. This section of the BOSFET chip utilizes both bipolar and MOS technology to form NPN transistors, P-channel MOSFETs, resistors, diodes and capacitors.

The photovoltaic generator similarly utilizes a unique International Rectifier alloyed multijunction structure. The excellent current conversion efficiency of this technique results in the very fast response of the PVR microelectronic power IC relay.

This advanced semiconductor technology has created a radically new control device. Designers can now develop switching systems to new standards of electrical performance and mechanical compactness.

### Features

- BOSFET Power IC ■
- $10^{10}$  Operations ■
- 100μsec Operating Time ■
- 0.2μV Thermal Offset ■
- 5 milliwatts Pick-Up Power ■
- 1000V/μsec dv/dt ■
- Bounce-Free ■
- 16-pin DIP Package ■
- 40°C to 85°C ■

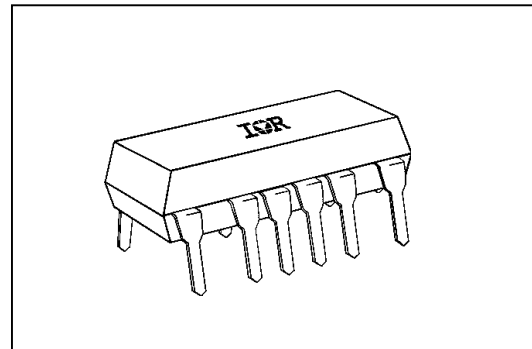

### Part Identification

| Part Number | Operating Voltage (AC/DC) | Off-State Resistance |
|-------------|---------------------------|----------------------|
| PVR2300     | 0 – 200V                  | $10^8$ Ohms          |
| PVR3300     | 0 – 300V                  | $10^8$ Ohms          |
| PVR3301     | 0 – 300V                  | $10^{10}$ Ohms       |

(BOSFET is a trademark of International Rectifier)

## Series PVR33

**Replaced by PVR33N**

International  
**IOR** Rectifier

### Electrical Specifications ( $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ unless otherwise specified)

| INPUT CHARACTERISTICS                                                  |           | Units   |
|------------------------------------------------------------------------|-----------|---------|
| Minimum Control Current (see figure 1)                                 |           | DC      |
| For 20mA Continuous Load Current                                       | 2.0       | mA@25°C |
| For 100mA Continuous Load Current                                      | 5.0       | mA@25°C |
| For 20mA Continuous Load Current                                       | 5.0       | mA@85°C |
| Minimum Turn-Off Current                                               | 10        | μA(DC)  |
| Minimum Turn-Off Voltage                                               | 0.6       | V(DC)   |
| Control Current Range (Caution: current limit input LED. See figure 6) | 2.0 to 25 | mA(DC)  |
| Maximum Reverse Voltage                                                | 7.0       | V(DC)   |

| OUTPUT CHARACTERISTICS                                                     | PVR2300          | PVR3300, PVR3301 | Units               |
|----------------------------------------------------------------------------|------------------|------------------|---------------------|
| Operating Voltage Range                                                    | ±200             | ±300             | V <sub>(peak)</sub> |
| Maximum Load Current 40°C (see figure 1)                                   |                  |                  |                     |
| AC (A Connection)                                                          | 180              |                  | mA (peak)           |
| DC (B Connection)                                                          | 200              |                  | mA(DC)              |
| DC (C Connection)                                                          | 260              |                  | mA(DC)              |
| Response Time @25°C (see figure 7)                                         |                  |                  |                     |
| Maximum T <sub>(on)</sub> @ 12mA Control, 100 mA Load, 100 VDC             | 150              |                  | μs                  |
| Maximum T <sub>(off)</sub> @ 12mA Control, 100 mA Load, 100 VDC            | 50               |                  | μs                  |
| Maximum On-state Resistance 25°C (Pulsed) (fig. 2) 50 mA Load, 8mA Control |                  |                  |                     |
| AC (A Connection)                                                          | 24               |                  | Ω                   |
| DC (B Connection)                                                          | 12               |                  | Ω                   |
| DC (C Connection)                                                          | 6                |                  | Ω                   |
| Minimum Off-state Resistance 25°C @ 160 VDC PVR2300, PVR3300               | 10 <sup>8</sup>  |                  | Ω                   |
| @ 240 VDC PVR3301                                                          | 10 <sup>10</sup> |                  | Ω                   |
| Maximum Thermal Offset Voltage @ 5.0mA Control                             | 0.2              |                  | μvolts              |
| Minimum Off-State dv/dt                                                    | 1000             |                  | V/μs                |
| Output Capacitance (see figure 3)                                          | 12               |                  | pF @ 50VDC          |

| GENERAL CHARACTERISTICS (PVR2300, PVR3300, PVR1301)                        |                 | Units            |
|----------------------------------------------------------------------------|-----------------|------------------|
| Dielectric Strength: Input-Output                                          | 1500            | V <sub>RMS</sub> |
| Insulation Resistance: Input-Output @ 500V <sub>DC</sub>                   | 10 <sup>9</sup> | Ω                |
| Maximum Capacitance: Input-Output                                          | 1.0             | pF               |
| Maximum Lead Soldering Temperature (1.6mm below seating plane for 10 sec.) | 260             | °C               |
| Ambient Temperature Range:                                                 |                 |                  |
| Operating                                                                  | -40 to +85      | °C               |
| Storage                                                                    | -40 to +100     |                  |

Replaced by PVR33N

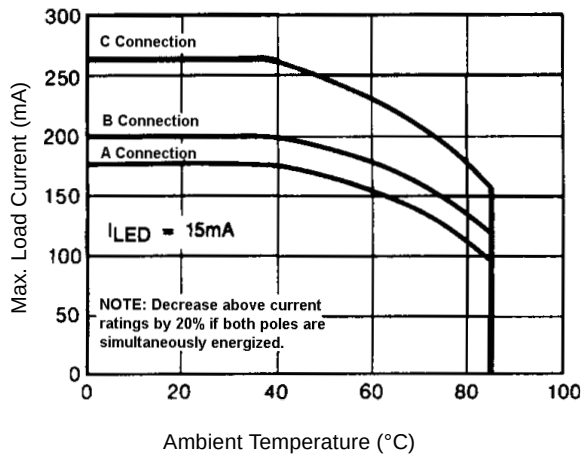


Figure 1. Current Derating Curve

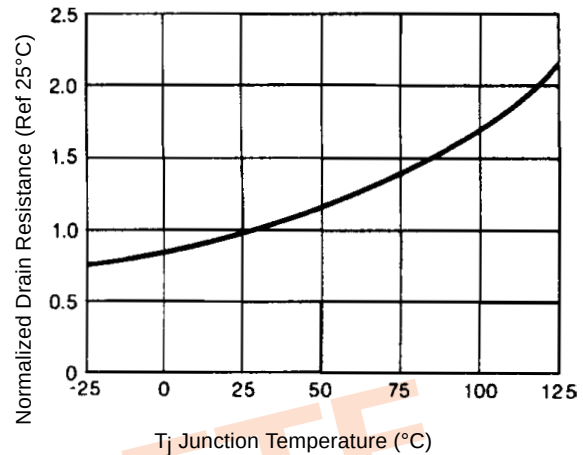


Figure 2. Typical Normalized On-Resistance

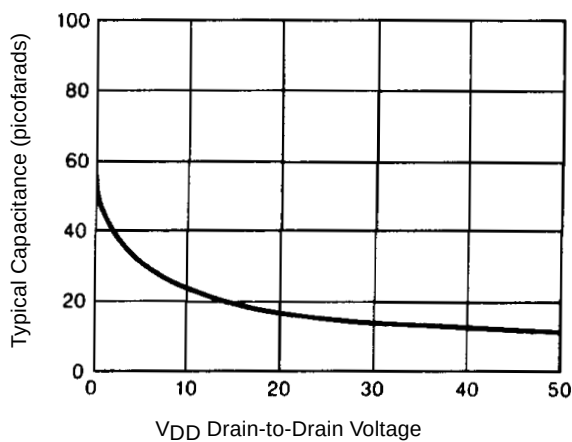


Figure 3. Typical Output Capacitance

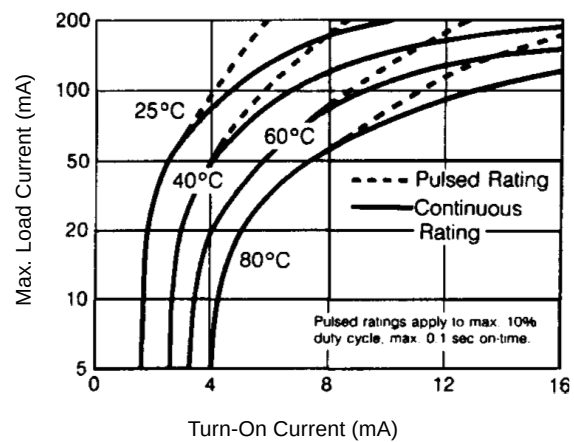


Figure 4. Minimum Control Current for Full Turn-On

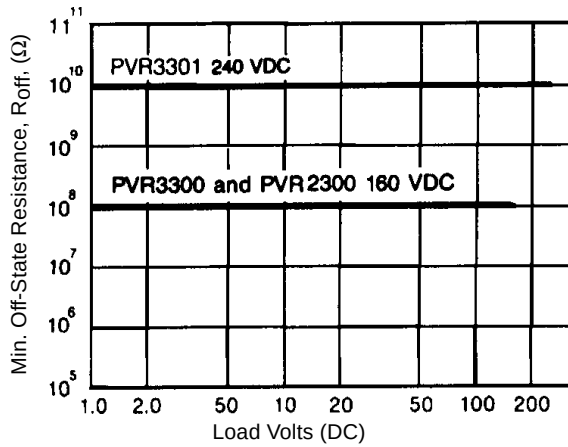


Figure 5. Off-State Resistance

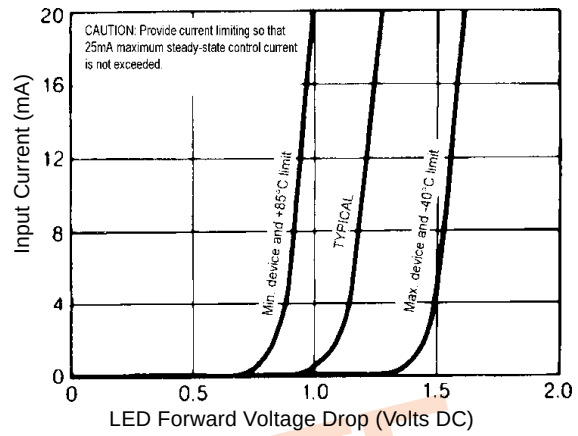


Figure 6. Input Characteristics (Current Controlled)

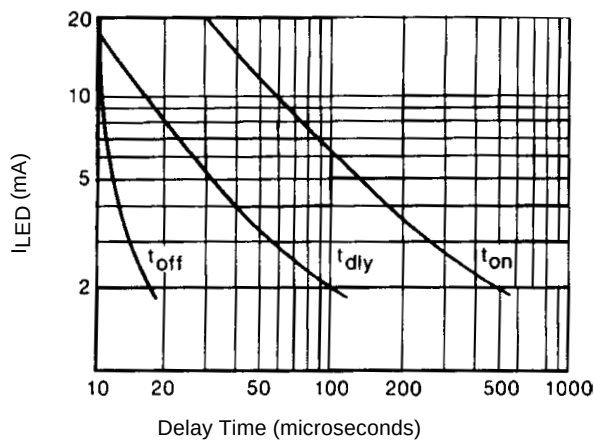


Figure 7. Typical Delay Times




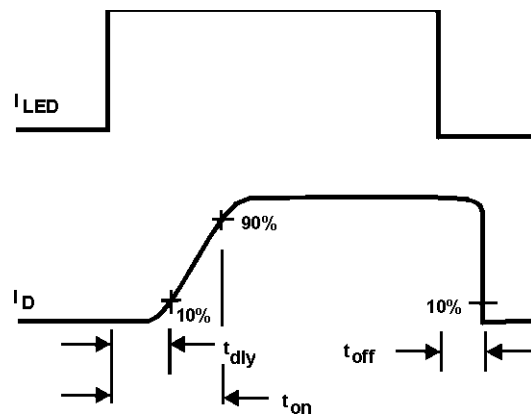



Figure 8. Delay Time Definitions

**Replaced by PVR33N**

## Wiring Diagram

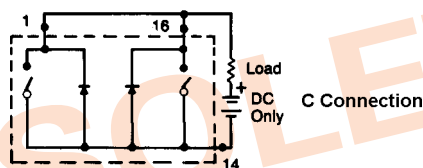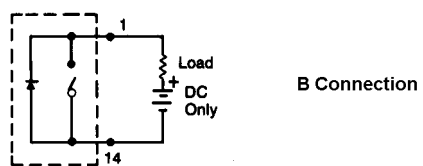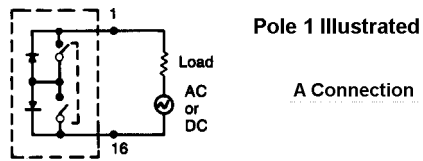

## Schematic Diagram

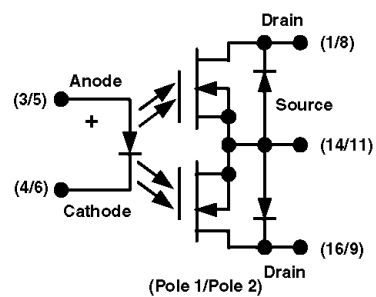


Series PVR33

Replaced by PVR33N

International  
**IR** Rectifier

### Case Outline

(Dimensions in inches (millimeters))

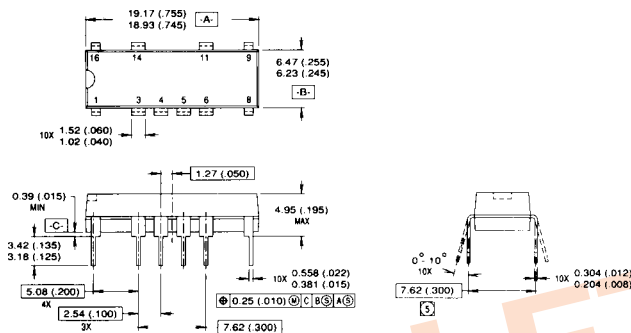

### Mechanical Specifications:

Package: 16-pin DIP

Tolerances: .015 (.38) unless otherwise specified

Case Material: molded epoxy

International  
**IR** Rectifier

WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245 Tel: (310) 252-7105

<http://www.irf.com/> Data and specifications subject to change without notice. 12/6/2000