

GP2W2001YK/ GP2W2002YK

■ Features

- Compliant with IrDA control
GP2W2001YK : for peripheral Type 1
GP2W2002YK : for peripheral Type 2
- Long distance (approx. 8m (Min. 5m)) wireless communication at 75kbps data rate (Radiant intensity=100mW/sr) (**GP2W2001YK**)
- Wide viewing angle (Min. 1.5m, $\pm 40^\circ$) wireless communication at 75kbps data rate (**GP2W2002YK**)
- Low power operation : 3.3V
- Built-in envelope detector
- By using assistance LED (SHARP) (**GL710**), able to use for Host Type. (**GP2W2001YK**)
- RESET function to recover the receiver sensitivity
- Optimized interface to sharp peripheral engine, an embedded communication controller for IrDA Control

■ Applications

- Personal Computers
- Input devices for PC (mouse, keyboard, joy stick)
- Amusement equipment
- AV equipment
- Universal controllers

■ Absolute Maximum Ratings (Ta=25°C)

| Parameter | Symbol | Rating | Unit |
|--------------------------------|---------------------|-----------------|------|
| Supply voltage | V _{CC} | 0 to 6.0 | V |
| Operating temperature | T _{OP} | -10 to 70 | °C |
| Storage temperature | T _{stg} | -20 to 85 | °C |
| Average forward LED current | I _F (DC) | 60 | mA |
| *1 Peak forward LED current | I _{FM} | 600 | mA |
| Transmitter data input current | I _{TXD} | 5.0 | mA |
| Receiver data output current | V _O | V _{CC} | V |
| *2 Soldering temperature | T _{SOL} | 260 | °C |


*1 Refer to Fig.13

*2 For MAX. 5s at the position of 1.3mm from the resin edge.

IrDA Transceiver Module Compliant with IrDA Control

■ Outline Dimensions

(Unit : mm)

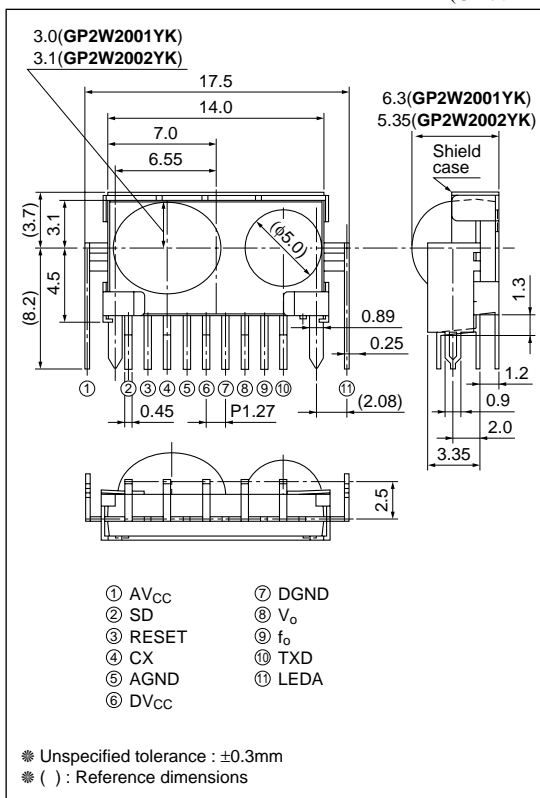

■ Recommended Operating Conditions

(Ta=25°C)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|--|------------|-----------------------|---|--------|------|-----------------|--------------------|
| Operating temperature | | T _{OP} | | −10 | − | +70 | °C |
| Supply voltage | | V _{CC1} | Supply voltage of detector side | 2.7 | − | 5.5 | V |
| Supply voltage | | V _{CC2} | Supply voltage of emitter side | 4.25 | − | 5.25 | V |
| Transmitter input subcarrier frequency | | f _{SC} | *3 Frequency accuracy within the range of ±1.1% | 1.484 | − | 1.517 | MHz |
| Logic high transmitter input voltage (TXD) | | V _{IH} (TXD) | | 2.7 | − | − | V |
| Logic low transmitter input voltage (TXD) | | V _{IL} (TXD) | | 0.0 | − | 0.3 | V |
| Logic low receiver input irradiance | GP2W2001YK | E _{IIL} | *5 θ _r ≤±40°, φ _r ≤±25° *4 For in-band signals≤75.83kbps | 0.4 | − | 1 250 | μW/cm ² |
| | | | *5 θ _r ≤±50°, φ _r ≤±15° *4 For in-band signals≤75.83kbps | 1.111 | − | 1 250 | μW/cm ² |
| | GP2W2002YK | E _{IIL} | *5 θ _r ≤±40°, φ _r ≤±25° *4 For in-band signals≤75.83kbps | 3.0 | − | 1 250 | μW/cm ² |
| | | | | | | | |
| LED (logic high) current | | I _{LEDA} | I _E =100mW/sr, *5 θ _t ≤±15°, φ _t ≤±15° | 400 | − | − | mA |
| Receiver signal rate | | D _{RATE} | | 74.175 | − | 75.825 | kbps |
| High level input valtage (RESET terminal) | | V _{IHRE} | *6 Refer to "RESET Function" | 2.1 | − | V _{CC} | V |
| Low level input valtage (RESET terminal) | | V _{ILRE} | *6 Refer to "RESET Function" | 0 | − | 0.6 | V |
| Recovery time | | t _{ret} | | − | − | 40 | μs |
| SD recovery time | | t _{SD} | | − | − | 1 | ms |
| High level input voltage (SD terminal) | | V _{IHSD} | *7 | 2.2 | − | V _{CC} | V |
| Low level input voltage (SD terminal) | | V _{ILSD} | *7 | 0 | − | 0.5 | V |
| Input current (Tx terminal) GP2W2002YK | | I _{TX} | V _{IH} (TXD)=2.7V | 2.3 | − | 2.6 | mA |

*3 IrDA Control system uses 16PSM coding scheme over 1.5MHz sub-carrier. See [Infrared IrDA control Specification] Version 1.0 for the details of coding scheme and pulse characteristics.

*4 An in-band optical signal is a pulse/sequence where the peak wavelength λ_p is defined as $850\text{nm} \leq \lambda_p \leq 900\text{nm}$, and the pulse characteristics (Refer to Fig.5) are compliant with [Infrared IrDA control Specification] Version 1.0.

*5 Refer to Fig.7

*6 Refer to Fig.8

■ Electro-optical Characteristics

(Ta=25°C)

| Parameter | | Symbol | Conditions | MIN. | TYP. | MAX. | Unit | |
|--------------------------------|---------------------------|----------------------|--|---------------------------------------|----------------------|-------|-------|----|
| Receiver side | Dissipation current | | I _{CC} | No input light, V _{CC} =3.3V | — | 5.0 | 7.0 | mA |
| | S/D dissipation current | | I _{CCSD} | At S/D mode *7 | — | 7.0 | 10.0 | μA |
| | High level output voltage | | V _{OH} | No input light, High level | V _{CC} -0.5 | — | — | V |
| | Low level output voltage | | V _{OL} | I _{OL} =400μA | — | — | 0.5 | V |
| | Pules width | Single | t _{ws} | Input pules width 6.33μs *9, *10 | 3.66 | 6.67 | 9.67 | μs |
| | | Double | t _{wd} | Input pules width 13.0μs *9, *10 | 10.33 | 13.33 | 16.34 | μs |
| | | Multi | t _{wm} | Input pules width 53.0μs *9, *10 | 50.36 | 53.36 | 56.36 | μs |
| | Jitter | | t _j | Refer to *8, *9 | -1.8 | — | +1.8 | μs |
| | Rise time | | t _r | Refer to *9 | — | — | 6.0 | μs |
| | Fall time | | t _f | Refer to *9 | — | — | 6.0 | μs |
| Maximum communication distance | GP2W2001YK | L ₁ | 100mW/sr, θ _r ≤30°, φ _r ≤15° | 5.0 | — | — | m | |
| | | L ₂ | 100mW/sr, θ _r ≤50°, φ _r ≤15° | 3.0 | — | — | m | |
| | | L ₁ | 68mW/sr, θ _r ≤40°, φ _r ≤25° | 1.5 | — | — | m | |
| Radiant intensity | GP2W2001YK | I _E | θ _t ≤15°, φ _t ≤15°, I _{LED} A=400mA, *10, *11 | 100 | — | — | mW/sr | |
| | GP2W2002YK | | θ _t ≤40°, φ _t ≤25°, I _{LED} A=400mA, *10, *11 | 9 | — | — | mW/sr | |
| | Peak emission wavelength | | λ _p | I _{LED} A=400mA | 850 | — | 900 | nm |
| Rise time | | t _r (LED) | *10, *11 | — | — | 80 | ns | |
| Fall time | | t _f (LED) | *10, *11 | — | — | 80 | ns | |

* t_{WM}=53.00μs (6.67μs×8-0.36)

*7 "L": low current consumption mode, "H" or OPEN: normal operating mode.

*8 The time difference or time gap from the pulse judgement criteria point of the output waveform at the 50% point between V_{OH} and V_{OL}.

*9 Refer to Fig.4

*10 Refer to Fig.5

*11 Refer to Fig.6

Fig.1 Recommended External Parts

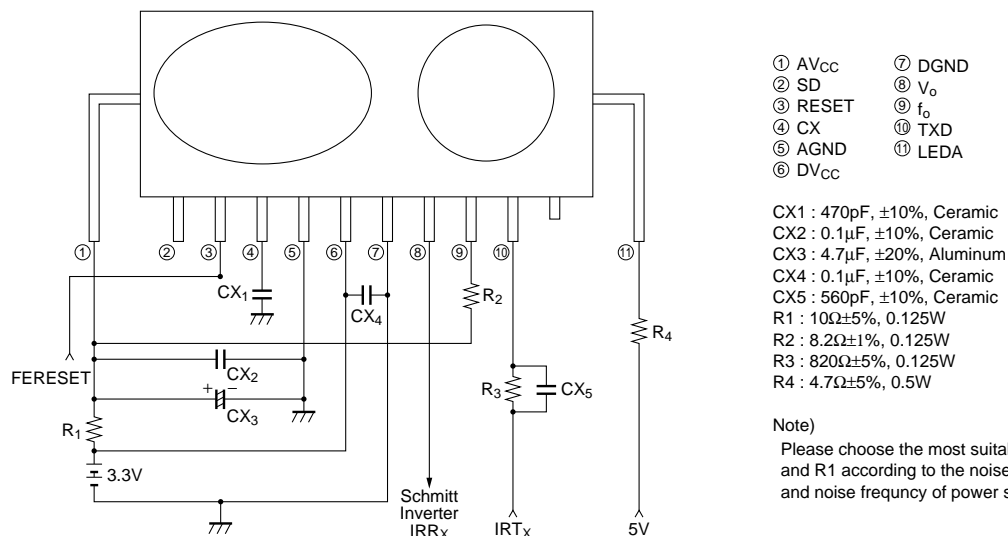


Fig.2 System Configuration

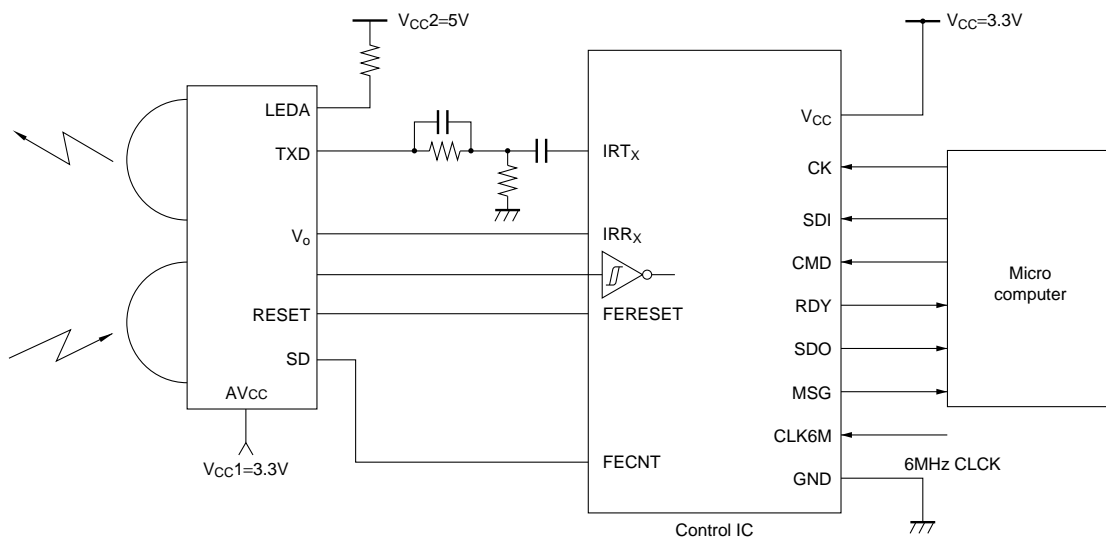


Fig.3 Example of Signal Waveform

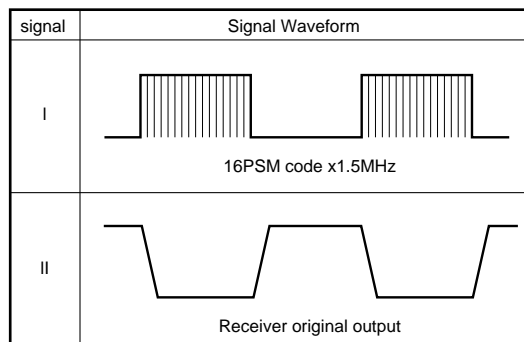
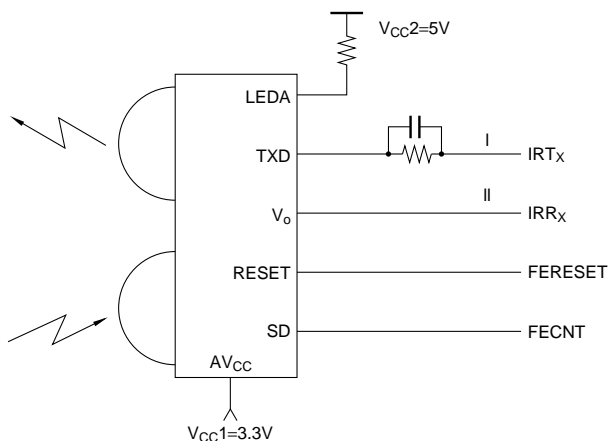


Fig.4 Output Waveform (Receiver side)


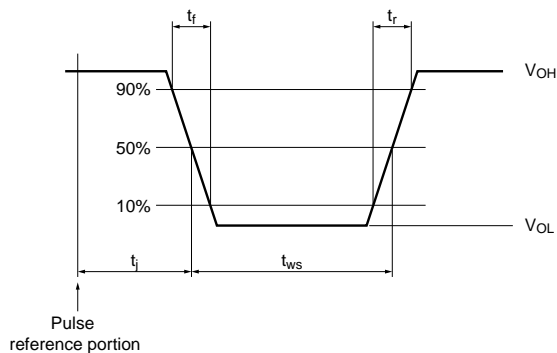


Fig.5 Output Waveform (Transmitter side)

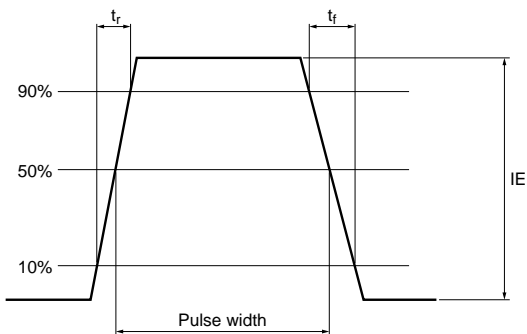

The light emitting diode (SHARP GL710, $\lambda_p=850$ to $900nm$) is used as the transmitter, where the following continuous signals are transmitted.


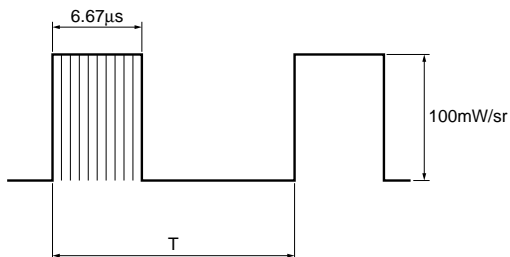


Fig.6 Recommended Circuit of Transmitter side

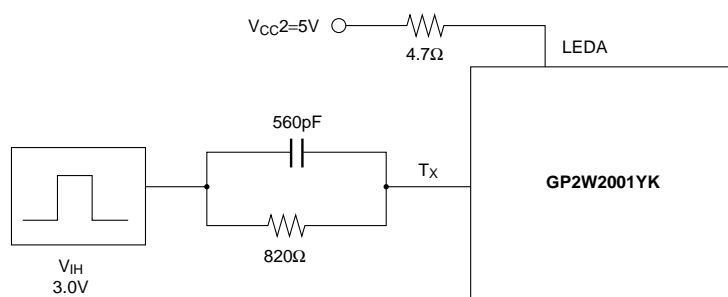

Output signal (Fig.5) shall be complete electro-optical characteristics of transmitter side.

Fig.7 Viewing Angle Criteria


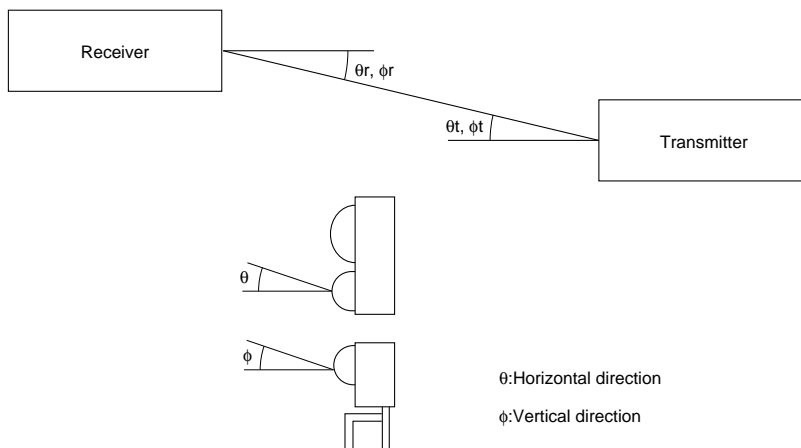


Fig.8 RESET Function

The “RESET” terminal is used to recover the receiver sensitivity to its maximum level.

Sharp IrDA control Transceiver has a built-in capability to adjust the receiver sensitivity (Threshold level adjustment). With this function, in order to receive very weak infrared signals right after very strong infrared signals, following input to “RESET” terminal provides the receiver sensitivity recovery to its maximum level.

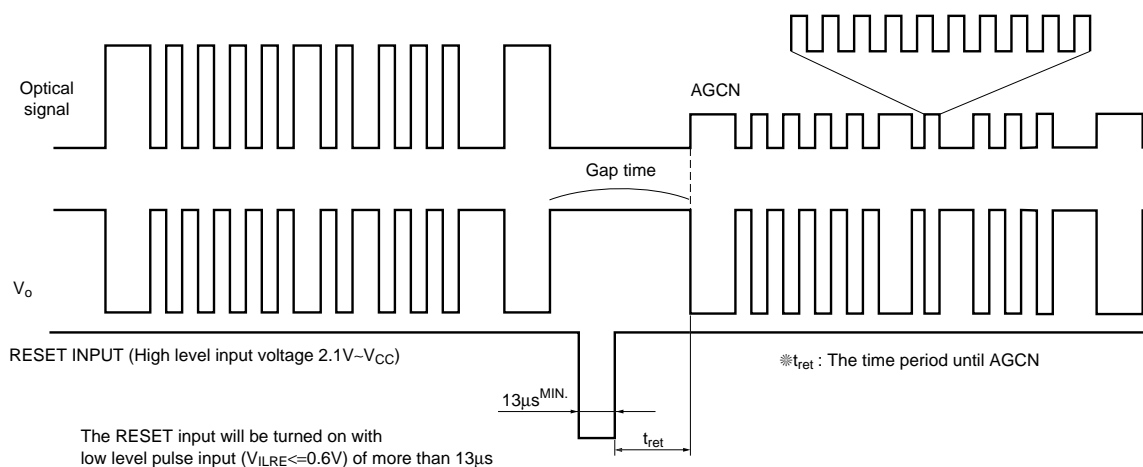

The RESET input must be pulsed to the transceiver within the gap time for correct operation.

The timing for “RESET” must be adjusted at the controlled IC.

Fig.9 Peak Forward Current vs. Ambient Temperature

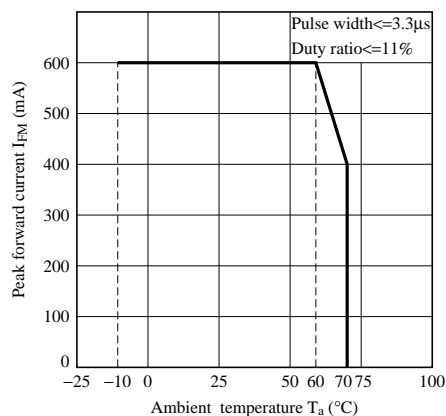


Fig.10 Relative Communication Distance vs. Ambient Temperature

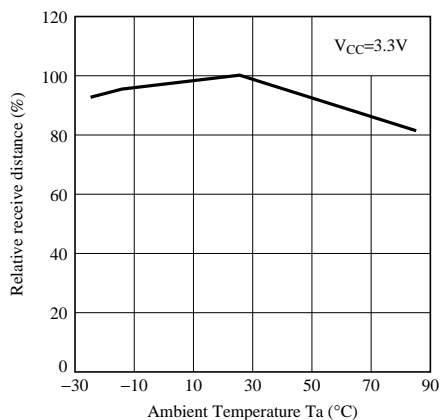


Fig.11 Radiation Diagram(GP2W2001YK)

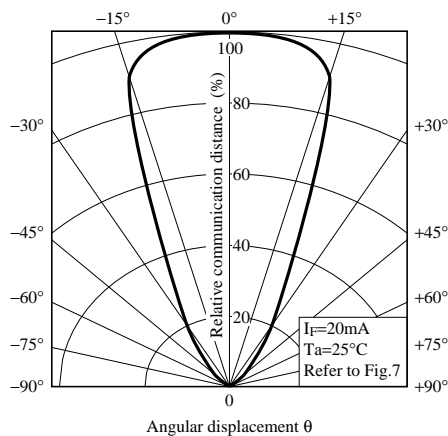


Fig.12 Radiation Diagram (GP2W2002YK)

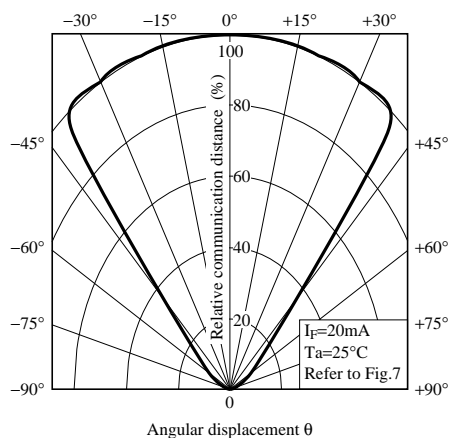


Fig.13 Sensitivity Diagram (GP2W2001YK)

Transmitter radiant intensity : 100mW/sr
 Transmitter code : 16psm code
 $V_{CC}=3.3\text{V}$, $T_a=25^\circ\text{C}$
 Refer to Fig.7

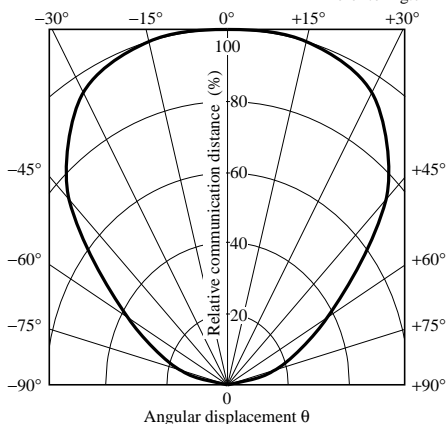


Fig.14 Sensitivity Diagram (GP2W2002YK)

Transmitter radiant intensity : 100mW/sr
 Transmitter code : 16psm code
 $V_{CC}=3.3\text{V}$, $T_a=25^\circ\text{C}$
 Refer to Fig.7

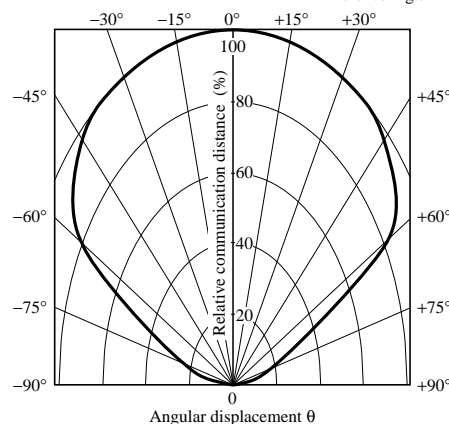


Fig.15 Spectral Distribution


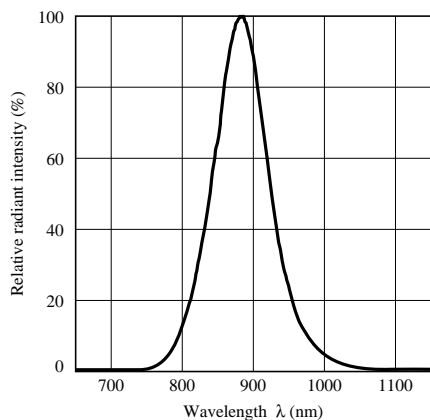


Fig.16 Spectral Sensitivity

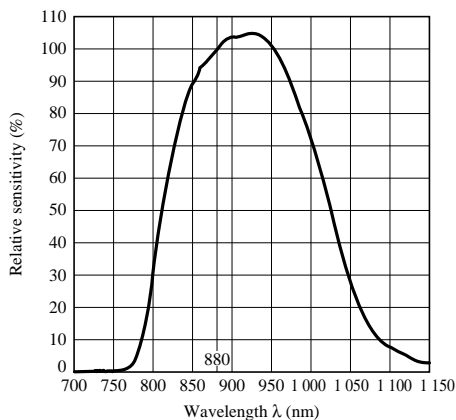

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.