

ZLLS500


40V SILICON HIGH CURRENT LOW LEAKAGE SCHOTTKY DIODE

SUMMARY

Schottky Diode $V_R = 40V$; $I_F = 0.7A$; $I_R = 10\mu A$

DESCRIPTION

This compact SOT23 packaged Schottky diode offers users an excellent performance combination comprising high current operation, extremely low leakage and low forward voltage ensuring suitability for applications requiring efficient operation at higher temperatures (above 85°C) see Operational Efficiency chart on page 4.



Key benefits:

Performance capability equivalent to much larger packages

Improved circuit efficiency & power levels

PCB area savings

FEATURES

Extremely Low Leakage ($10\mu A$ @30V)

High current capability ($I_F = 0.7A$)

Low V_F , Fast switching Schottky

SOT23 Package

ZLLS500 complements low temperature equivalent ZHCS500

Package thermally rated to 150°C

APPLICATIONS

DC - DC Converters


Strobes

Mobile Phones

Charging Circuits

Motor control

Cathode




Anode

ORDERING INFORMATION

DEVICE	REEL (inches)	TAPE WIDTH (mm)	QUANTITY PER REEL
ZLLS500TA	7	8mm embossed	3000 units
ZLLS500TC	13	8mm embossed	10000 units

DEVICE MARKING

L05



Top view

ZLLS500

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Schottky Diode			
Continuous Reverse Voltage	V _R	40	V
Forward Current	I _F	0.7	A
Peak Repetitive Forward Current Rectangular Pulse Duty Cycle	I _{FPK}	1.14	A
Non Repetitive Forward Current t≤100μs	I _{FSM}	13	A
t≤10ms		3.2	A
Package			
Power Dissipation at T _{amb} =25°C single die continuous	P _D	500	mW
single die measured at t<5 secs		630	mW
Storage Temperature Range	T _{stg}	-55 to +150	°C
Junction Temperature	T _j	150	°C

THERMAL RESISTANCE

PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient (a)	$R_{\theta JA}$	250	°C/W
Junction to Ambient (b)	$R_{\theta JA}$	198	°C/W


Notes

(a) For a device surface mounted on 25mm x 25mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.

(b) For a device surface mounted on FR4 PCB measured at $t < 5$ secs.

ZLLS500

TYPICAL CHARACTERISTICS

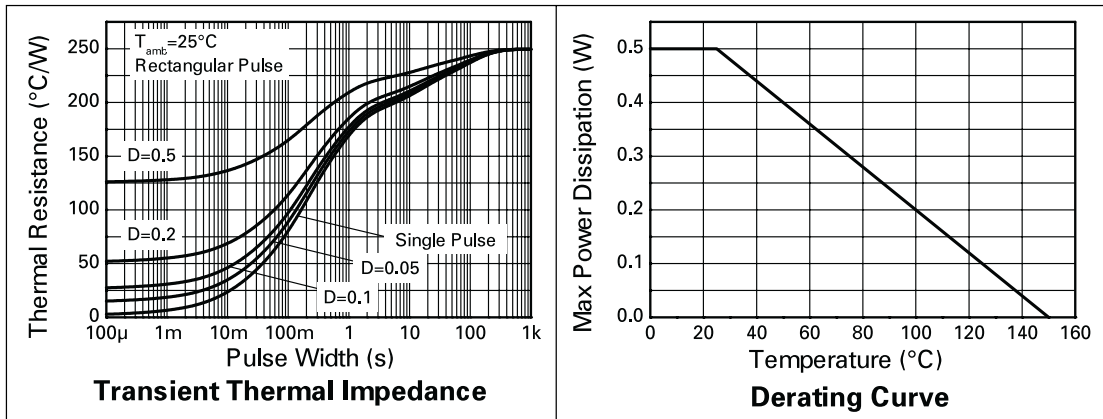

ZLLS500


ELECTRICAL CHARACTERISTICS (at Tamb = 25°C unless otherwise stated).

SCHOTTKY DIODE CHARACTERISTICS						
Reverse Breakdown Voltage	$V_{(BR)R}$	40			V	$I_R=200\mu A$
Forward Voltage	V_F		305	360	mV	$I_F=50\text{ mA}^*$
			335	390	mV	$I_F=100\text{ mA}^*$
			395	450	mV	$I_F=250\text{ mA}^*$
			465	530	mV	$I_F=500\text{ mA}^*$
			550	630	mV	$I_F=750\text{ mA}^*$
			620	710	mV	$I_F=1\text{ A}^*$
			710	800	mV	$I_F=1.5\text{ A}^*$
			494		mV	$I_F=500\text{ mA}^*, T_a = 100^\circ\text{C}$
Reverse Current	I_R		6	10	μA	$V_R=30\text{V}$
			370		μA	$V_R=30\text{V}, T_a = 85^\circ\text{C}$
Diode Capacitance	C_D		16		pF	$f=1\text{ MHz}, V_R=30\text{V}$
Reverse Recovery Time	t_{rr}		3		ns	Switched from $I_F = 500\text{ mA}$ to $V_R = 5.5\text{V}$ Measured @ $I_R = 50\text{ mA}$. $di/dt = 500\text{ mA/ns}$. $R_{source} = 6\Omega; R_{load} = 10\Omega$
Reverse Recovery Charge	Q_{rr}		210		pC	

* Measured under pulsed conditions. Pulse width = 300 μ S. Duty Cycle $\leq$ 2%.

Operational Efficiency chart

The operational efficiency chart indicates the beneficial use of the ZLLS Series diodes in applications requiring higher voltage, higher temperature operation. Circuits requiring Low voltage Low temperature operation will benefit from using Zetex low V_F ZHCS Series diodes.

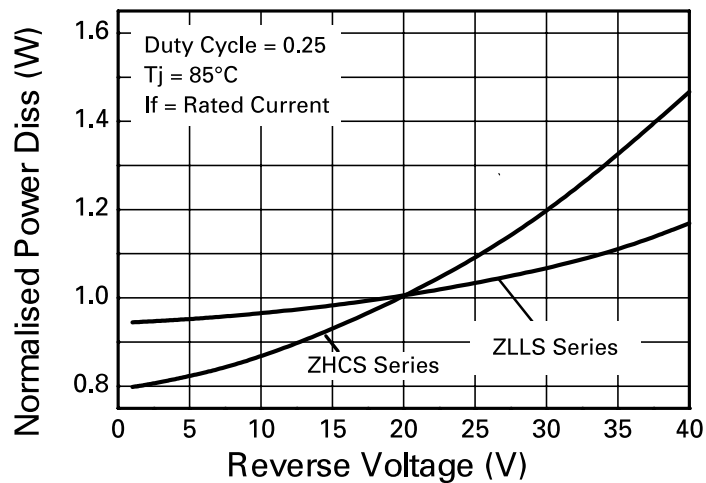


Operational Efficiency Example




ISSUE 2 - DECEMBER 2002

TYPICAL CHARACTERISTICS

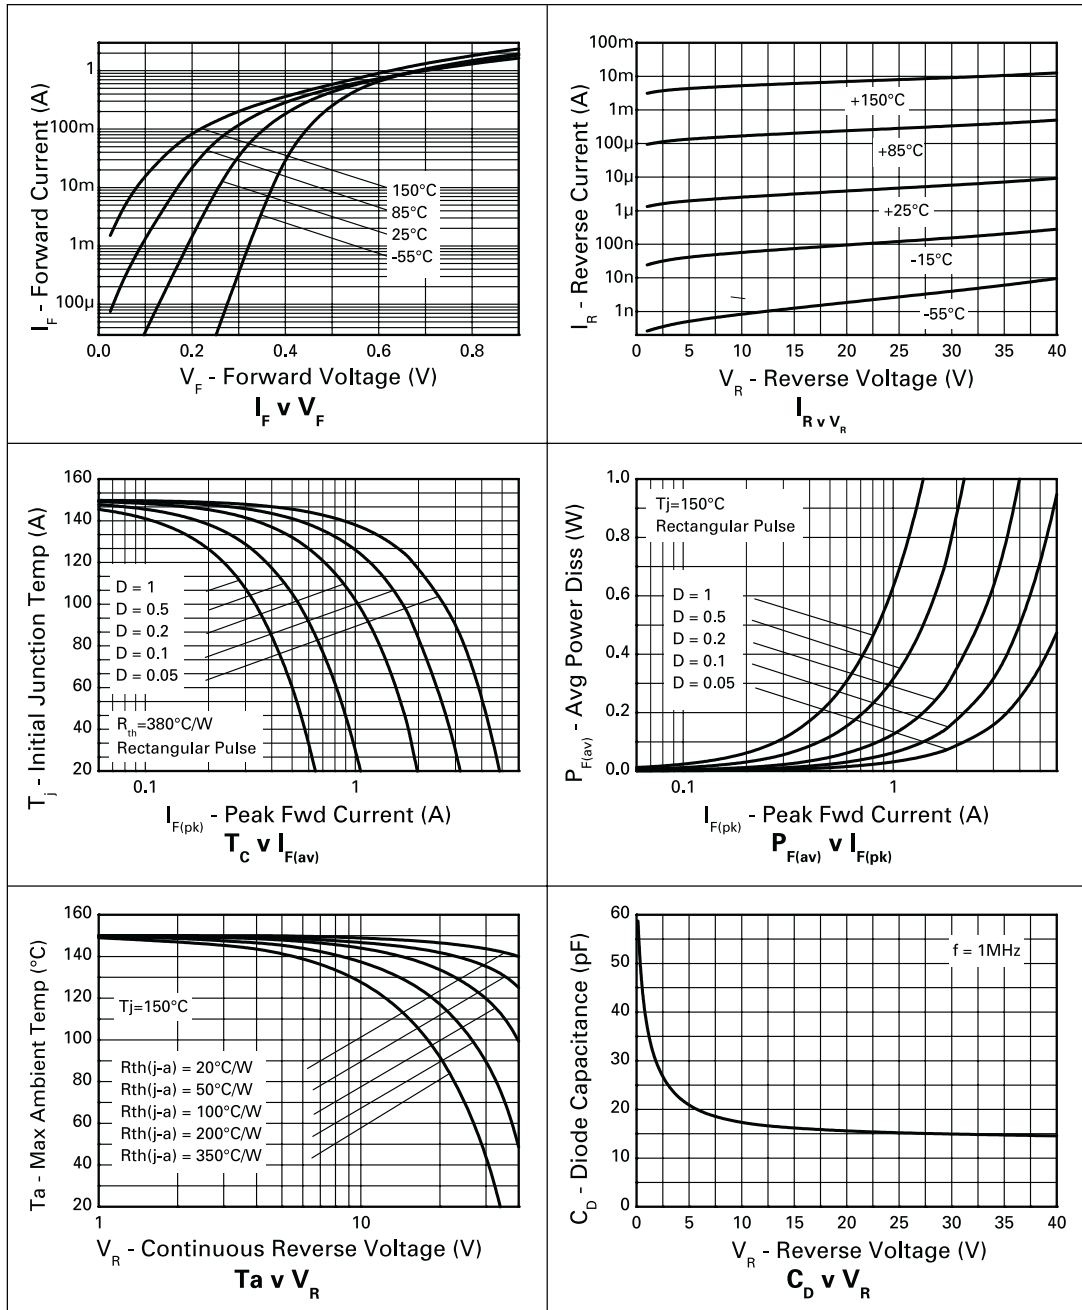


ZLLS500

Package Outline

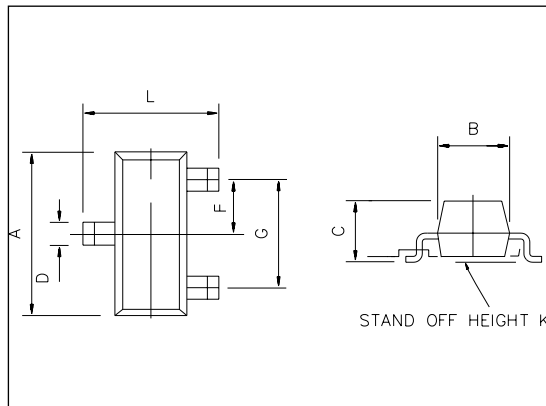

Pad Layout

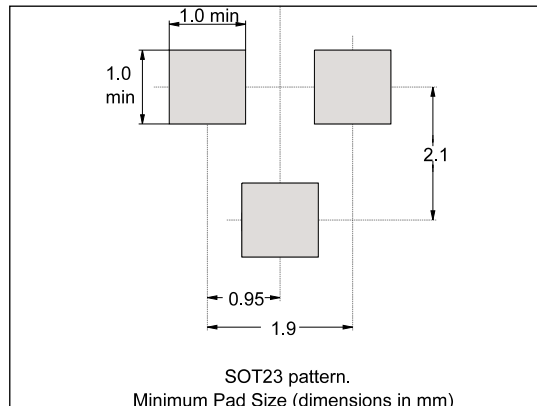

Package Dimensions

DIM	Millimetres		Inches	
	Min	Max	Min	Max
A	2.67	3.05	0.105	0.120
B	1.20	1.40	0.047	0.055
C	–	1.10	–	0.043
D	0.37	0.53	0.0145	0.021
F	0.085	0.15	0.0033	0.0059
G	NOM 1.9		NOM 0.075	
K	0.01	0.10	0.0004	0.004
L	2.10	2.50	0.0825	0.0985
N	NOM 0.95		NOM 0.037	

© Zetex plc 2001

Zetex plc Fields New Road Chadderton Oldham, OL9 8NP United Kingdom Telephone (44) 161 622 4422 Fax: (44) 161 622 4420	Zetex GmbH Streitfeldstraße 19 D-81673 München Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY11788 USA Telephone: (631) 360 2222 Fax: (631) 360 8222	Zetex (Asia) Ltd 3701-04 Metroplaza, Tower 1 Hing Fong Road Kwai Fong Hong Kong Telephone: (852) 26100 611 Fax: (852) 24250 494
--	--	---	---

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com



ISSUE 2 - DECEMBER 2002