

To all our customers

Regarding the change of names mentioned in the document, such as Hitachi Electric and Hitachi XX, to Renesas Technology Corp.

The semiconductor operations of Mitsubishi Electric and Hitachi were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Hitachi, Hitachi, Ltd., Hitachi Semiconductors, and other Hitachi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Renesas Technology Home Page: <http://www.renesas.com>

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

Cautions

Keep safety first in your circuit designs!

1. Renesas Technology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.
2. Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor for the latest product information before purchasing a product listed herein.
The information described here may contain technical inaccuracies or typographical errors. Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.
Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.

HD74HC4052/HD74HC4053

Dual 4-channel Analog Multiplexers/Demultiplexers
Triple 2-channel Analog Multiplexers/Demultiplexers



ADE-205-536 (Z)
1st. Edition
Sep. 2000

Description

HD74HC4052: This device connects together the outputs of 4 switches in two sets, thus achieving a pair of 4 channel multiplexers. The binary code placed on the A, and B select lines determine which switch in each 4 channel section is “on”, connecting one of the four inputs in each section to its common output. This enables the implementation of a 4 channel differential multiplexer.

HD74HC4053: This device contains 6 switches whose outputs are connected together in pairs, thus implementing a triple 2 channel multiplexer, or the equivalent of 3 single-pole-double throw configuration. Each of the A, B, or C select lines independently controls one pair of switches, selecting one of the two switches to be “on”.

Features

- High Speed Operation
- Wide Operating Voltage
- Low Quiescent Supply Current

HD74HC4052/HD74HC4053

Function Table


Control Inputs

Inhibit	Select			ON Switch				
	C* ¹	B	A	HD74HC4052		HD74HC4053		
L	L	L	L	Y ₀	X ₀	Z ₀	Y ₀	X ₀
L	L	L	H	Y ₁	X ₁	Z ₀	Y ₀	X ₁
L	L	H	L	Y ₂	X ₂	Z ₀	Y ₁	X ₀
L	L	H	H	Y ₃	X ₃	Z ₀	Y ₁	X ₁
L	H	L	L			Z ₁	Y ₀	X ₀
L	H	L	H			Z ₁	Y ₀	X ₁
L	H	H	L			Z ₁	Y ₁	X ₀
L	H	H	H			Z ₁	Y ₁	X ₁
H	X	X	X	—		—		


Note: 1. Not applicable for HD74HC4052
X = Don't Care

Pin Arrangement

HD74HC4052

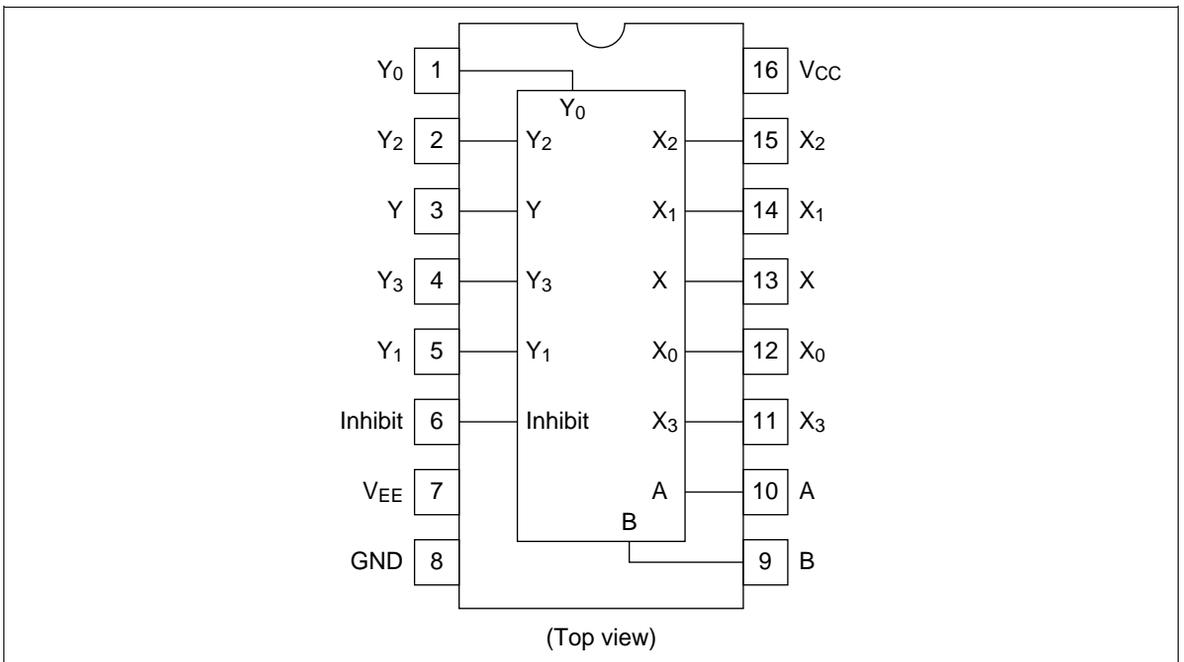


HD74HC4053

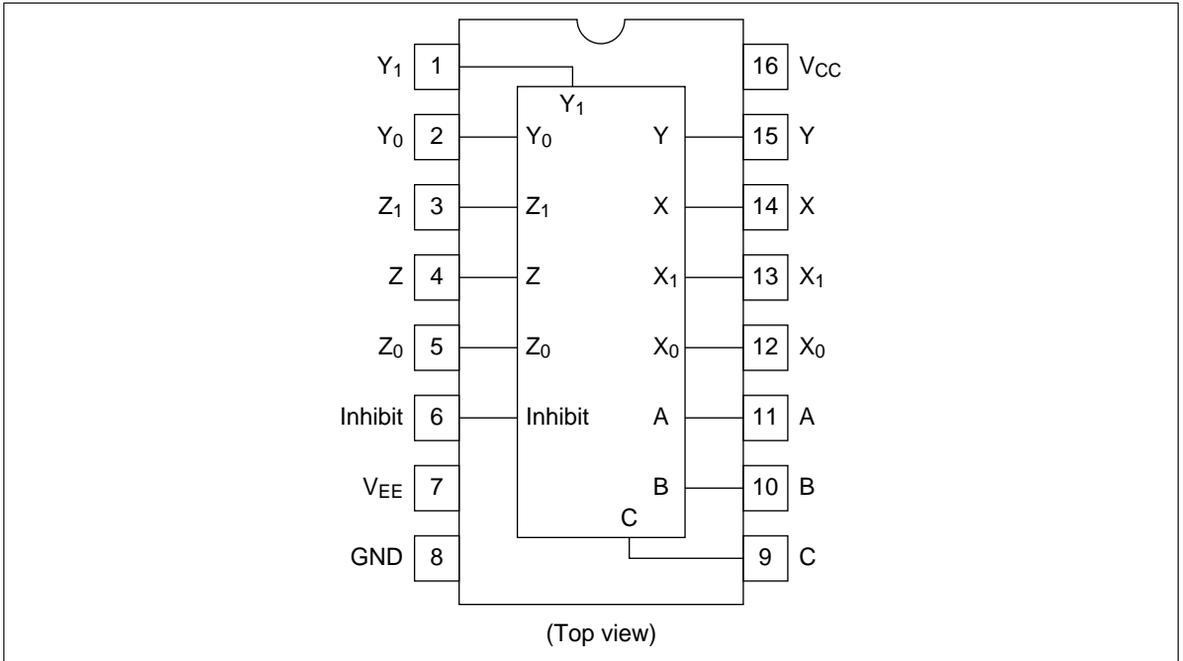


Block Diagram

HD74HC4052

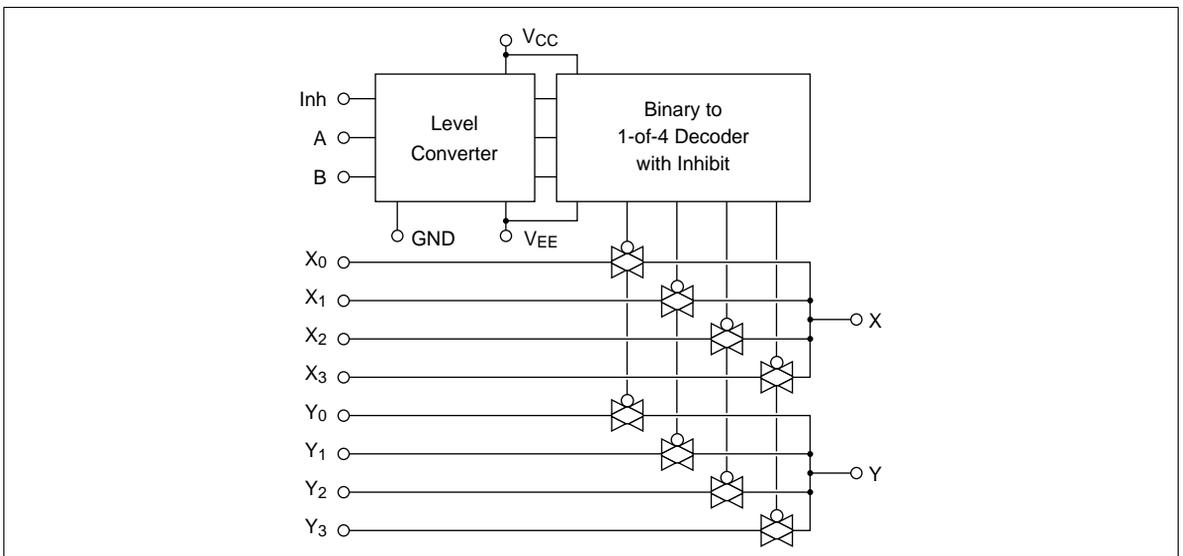

HD74HC4053

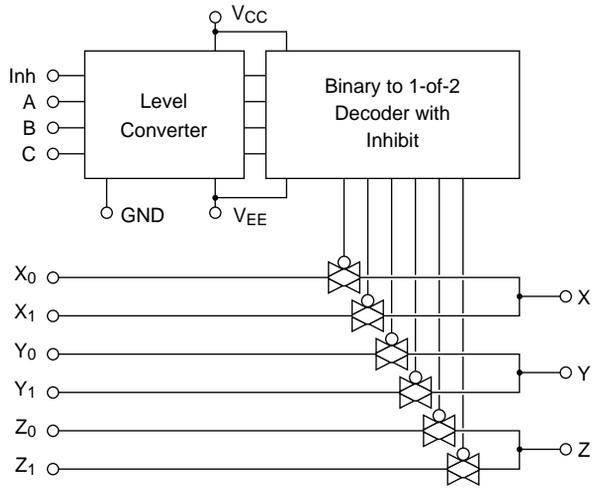

Absolute Maximum Ratings

Item	Symbol	Rating	Unit	
Supply voltage	V_{CC}	-0.5 to +7.0	V	
	$V_{CC} - V_{EE}$	-0.5 to +7.0	V	
Control input voltage	V_{IN}	GND - 0.5 to $V_{CC} + 0.5$	V	
Switch I/O voltage	V_{IO}	$V_{EE} - 0.5$ to $V_{CC} + 0.5$	V	
Supply current	(V_{CC})	I_{CC}	+50	mA
	(GND)	I_{GND}	-50	mA
Switch I/O current (per pin)	I_{IO}	±25	mA	
Control input diode current	I_{IK}	±20	mA	
Switch I/O diode current	I_{IOK}	±20	mA	
Power dissipation	P_T	500	mW	
Storage temperature range	Tstg	-65 to +150	°C	

Recommended Operating Range

Item	Symbol	Min	Typ	Max	Unit	
Supply voltage	$V_{CC} - V_{EE}$	2	—	6	V	
	$GND - V_{EE}$	-4	—	0	V	
Control input voltage	V_{IN}	0	—	V_{CC}	V	
Switch I/O voltage	$V_{I/O}$	V_{EE}	—	V_{CC}	V	
Operating temperature	Topr	-40	—	+85	°C	
Input rise/fall time	$V_{CC} = 2.0\text{ V}$	t_r, t_f	0	—	1000	ns
	$V_{CC} = 4.5\text{ V}$				500	ns
	$V_{CC} = 6.0\text{ V}$				400	ns

HD74HC4052/HD74HC4053

DC Characteristics ($V_{EE} = \text{GND}$)

Item	Symbol	V_{CC} (V)	$T_a = 25^\circ\text{C}$			$T_a = -40$ to $+85^\circ\text{C}$		Unit	Test Conditions
			Min	Typ	Max	Min	Max		
Control input voltage	V_{IH}	2.0	1.5	—	—	1.5	—	V	
		4.5	3.15	—	—	3.15	—		
		6.0	4.2	—	—	4.2	—		
	V_{IL}	2.0	—	—	0.5	—	0.5	V	
		4.5	—	—	1.35	—	1.35		
		6.0	—	—	1.8	—	1.8		
ON resistance	R_{ON}	2.0	—	2000	5000	—	6250	Ω	$V_{INH} = V_{IL}$
		4.5	—	120	180	—	225		$V_{IO} = V_{CC}$ to V_{EE}
		6.0	—	100	170	—	210		$I_{IO} \leq 2 \text{ mA}$
		2.0	—	200	800	—	1000	Ω	$V_{INH} = V_{IL}$
		4.5	—	80	150	—	190		$V_{IO} = V_{CC}$ to V_{EE}
		6.0	—	70	140	—	175		$V_{IO} \leq 2 \text{ mA}$
Δ ON resistance between any two channels	ΔR_{ON}	2.0	—	50	—	—	—	Ω	$V_{INH} = V_{IL}$
		4.5	—	13	40	—	50		$V_{IO} = V_{CC}$ to V_{EE}
		6.0	—	10	20	—	25		$I_{IO} \leq 2 \text{ mA}$
OFF channel leakage current (switch off)	$I_{S(OFF)}$	6.0	—	—	± 0.1	—	± 1.0	μA	$V_{INH} = V_{IL}$
OFF channel leakage current (switch on)	$I_{S(ON)}$	6.0	—	—	± 0.1	—	± 1.0	μA	$V_{INH} = V_{IL}$
Control input current	I_{in}	6.0	—	—	± 0.1	—	± 1.0	μA	$V_{in} = V_{CC}$ or GND
Quiescent supply current	I_{CC}	6.0	—	—	4.0	—	40	μA	$V_{in} = V_{CC}$ or GND

AC Characteristics ($C_L = 50$ pF, Input $t_r = t_f = 6$ ns, $V_{EE} = \text{GND}$)


Item	Symbol	V_{CC} (V)	$T_a = 25^\circ\text{C}$			$T_a = -40$ to $+85^\circ\text{C}$		Unit	Test Conditions
			Min	Typ	Max	Min	Max		
Propagation delay time	t_{PLH}	2.0	—	25	60	—	75	ns	$R_L = 10$ k Ω
		4.5	—	6	12	—	15		Switch input to switch output
		6.0	—	5	10	—	13		
	t_{PHL}	2.0	—	25	60	—	75	ns	
		4.5	—	6	12	—	15		
		6.0	—	5	10	—	13		
Propagation delay time	t_{PLH}	2.0	—	50	153	—	191	ns	$R_L = 10$ k Ω
		4.5	—	16	30	—	38		Control input to switch output
		6.0	—	14	26	—	33		
	t_{PHL}	2.0	—	50	153	—	191	ns	
		4.5	—	16	30	—	38		
		6.0	—	14	26	—	33		
Output enable time	t_{ZH}	2.0	—	50	153	—	191	ns	$R_L = 1$ k Ω
		4.5	—	14	30	—	38		
		6.0	—	12	26	—	33		
	t_{ZL}	2.0	—	50	153	—	191	ns	
		4.5	—	14	30	—	38		
		6.0	—	12	26	—	33		
Output disable time	t_{HZ}	2.0	—	40	153	—	191	ns	$R_L = 1$ k Ω
		4.5	—	17	30	—	38		
		6.0	—	14	26	—	33		
	t_{LZ}	2.0	—	40	153	—	191	ns	
		4.5	—	17	30	—	38		
		6.0	—	14	26	—	33		
Control input capacitance	C_{in}	—	—	5	10	—	10	pF	
Switch input capacitance	C_{in}	5.0	—	5	—	—	—	pF	
Output capacitance (Common pin)	C_{out}	5.0	—	12	—	—	—	pF	HD74HC4052
		5.0	—	6	—	—	—		HD74HC4053
Feed through capacitance	C_{in-out}	5.0	—	0.6	—	—	—	pF	HD74HC4052
		5.0	—	0.5	—	—	—		HD74HC4053

AC Characteristics ($C_L = 50$ pF, Input $t_r = t_f = 6$ ns, $V_{EE} = \text{GND}$) (cont)


Item	Symbol	V_{CC} (V)	$T_a = 25^\circ\text{C}$			$T_a = -40$ to $+85^\circ\text{C}$		Unit	Test Conditions
			Min	Typ	Max	Min	Max		
Power dissipation capacitance	C_{PD}	5.0	—	32.0	—	—	—	pF	HD74HC4052
		5.0	—	17.0	—	—	—		HD74HC4053
Sine wave distortion		4.5	—	0.1	—	—	—	%	$f_{in} = 1$ kHz, $V_{in} = 4 V_{P-P}$ $R_L = 10$ k Ω , $C_L = 50$ pF
Frequency response channel "ON" (Sine wave input)		4.5	—	95	—	—	—	MHz	$f_{in} = 1$ MHz, $20 \log_{10} V_{OS}/V_{IS} = -3$ dB $R_L = 50$ Ω , $C_L = 10$ pF
Feed through attenuation		4.5	—	-50	—	—	—	dB	$R_L = 600$ Ω , $C_L = 50$ pF, $f_{in} = 1$ MHz
Cross talk between control input and switch I/O		2.0	—	25	—	—	—	mV	$R_L = 600$ Ω , $C_L = 15$ pF, $f_{in} = 1$ MHz
		4.5	—	50	—	—	—		
		6.0	—	75	—	—	—		
Cross talk between any two switches		4.5	—	-50	—	—	—	dB	$R_L = 600$ Ω , $C_L = 50$ pF, $f_{in} = 1$ MHz
Maximum control frequency		2.0	—	20	—	—	—	MHz	$R_L = 1$ k Ω , $C_L = 15$ pF $V_{out} = 1/2 (V_{CC})$
		4.5	—	30	—	—	—		
		6.0	—	30	—	—	—		

AC Characteristics Test Circuit


Maximum Control Frequency

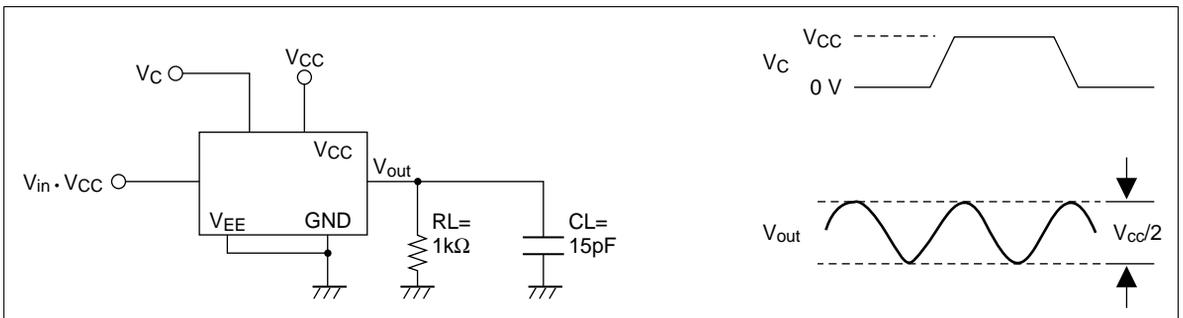


Cross talk (Between Any Two Switches)

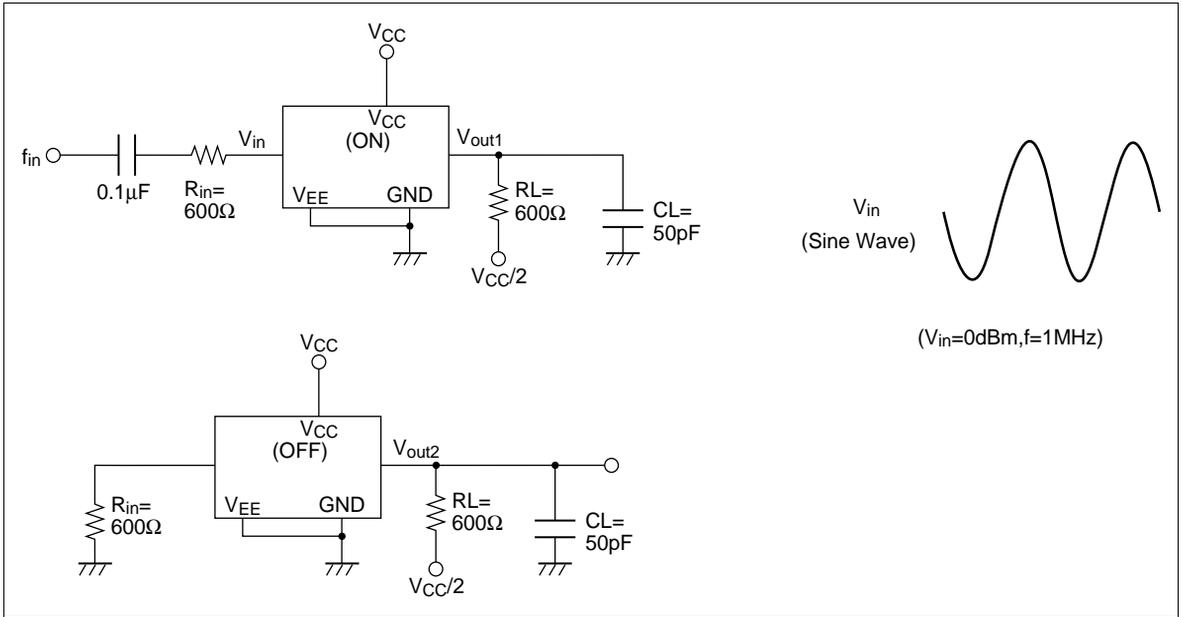


Cross talk (Control Input to Switch Output)

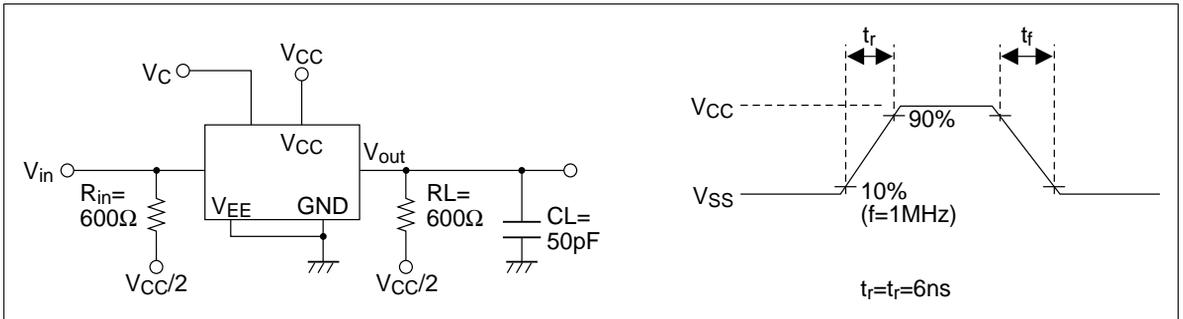


Feed through Attenuation

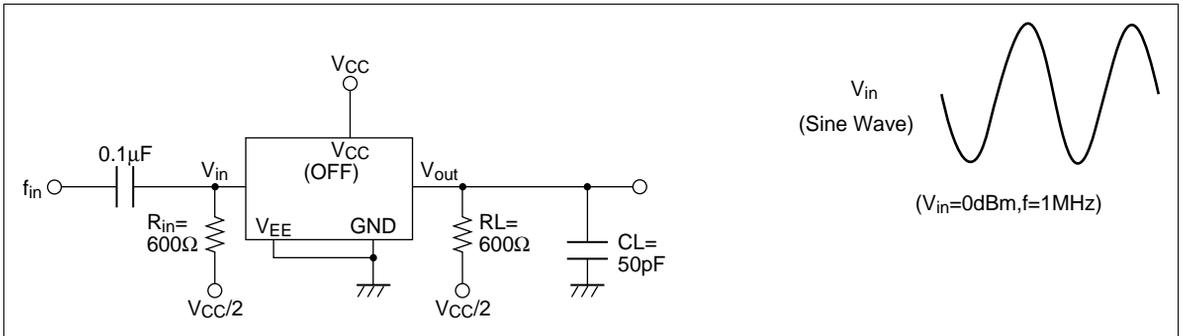


Sine Wave Distortion

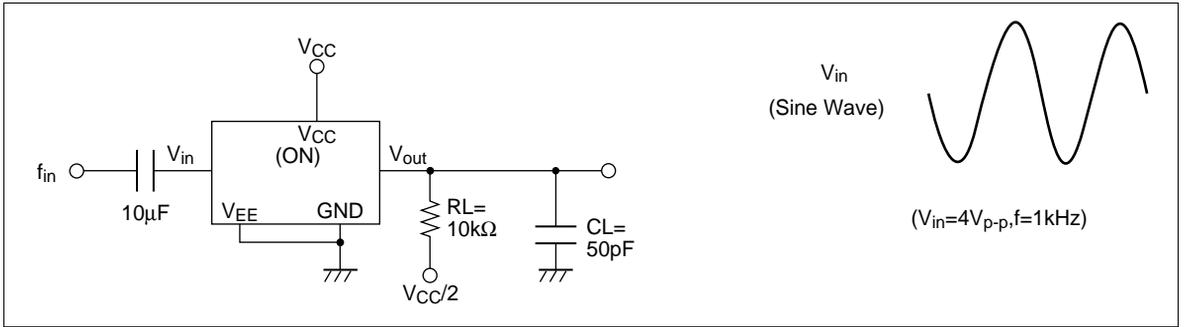


Cin, Cout, Cin-out (Input, Output and Feed through Capacitance)

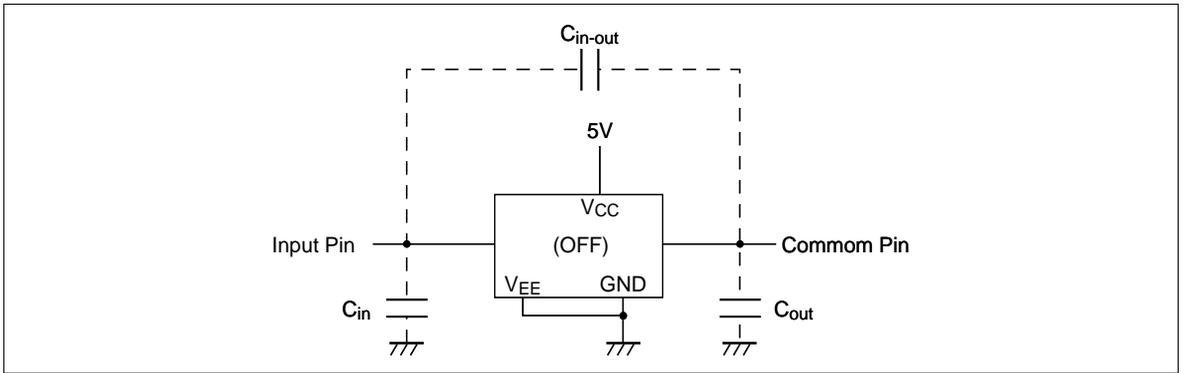


Frequency Response Channel ON

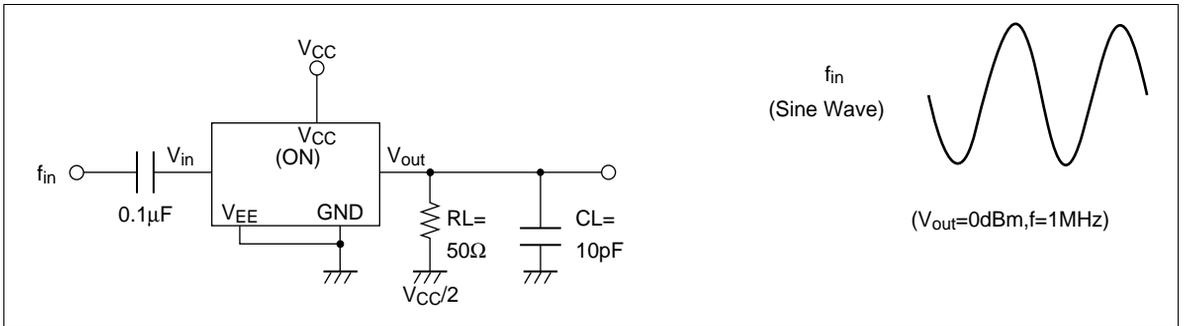


R_{ON}: ON Resistance

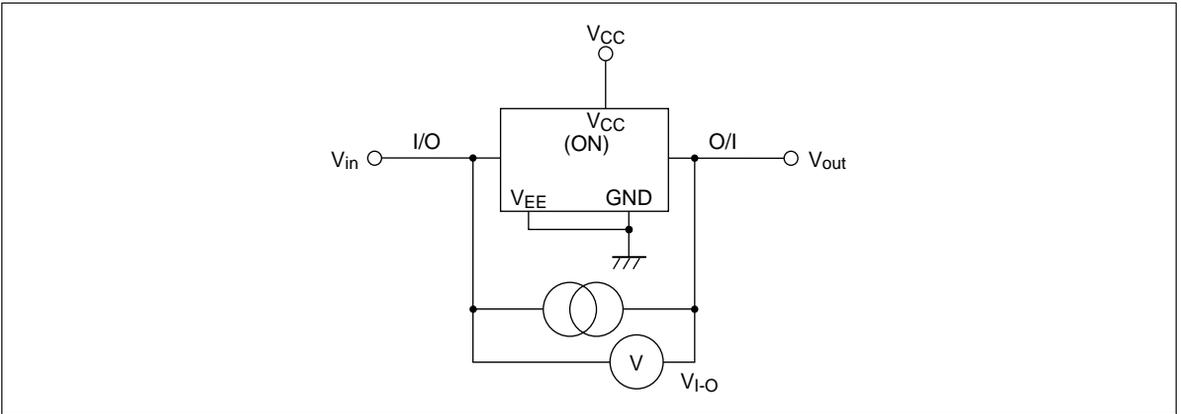


I_s (OFF): OFF Channel Leakage Current (Switch OFF)

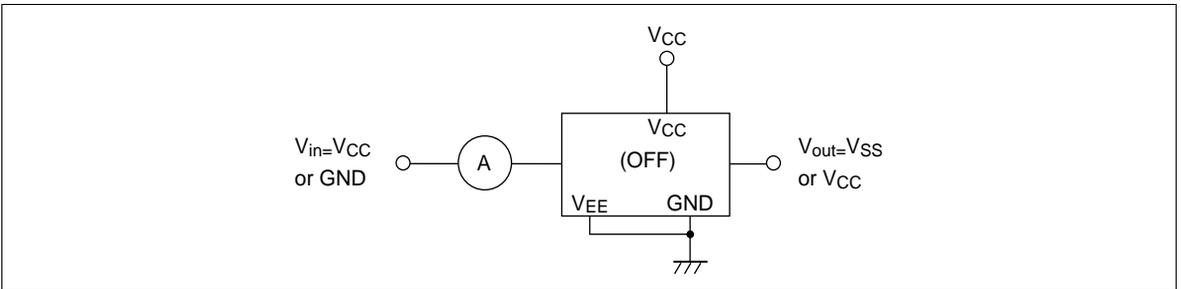


I_s (ON): ON Channel Leakage Current (Switch ON)

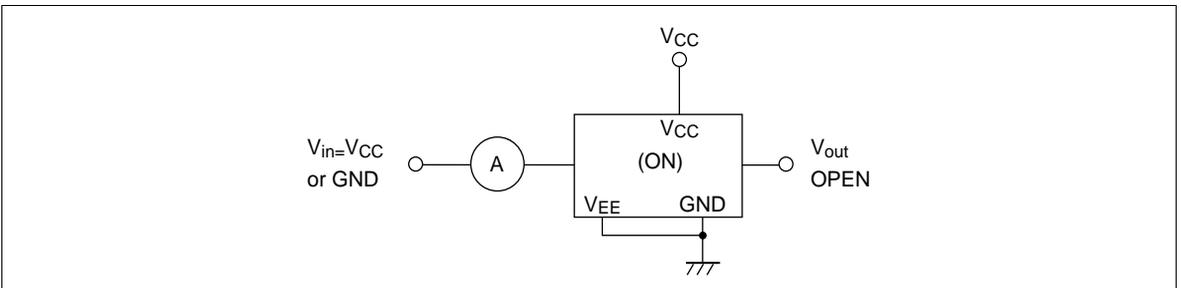


t_{PLH} , t_{PHL} : Propagation Delay Time (Switch Input to Switch Output)

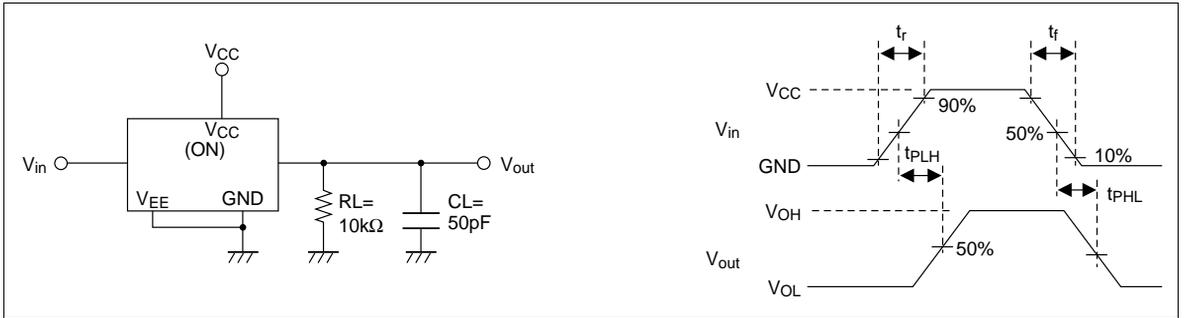

t_{PLH} , t_{PHL} : Propagation Delay Time (Control Input to Switch Output)

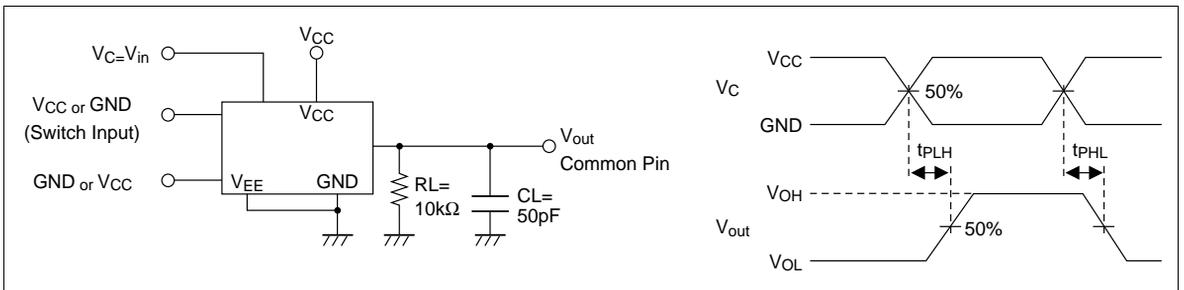


t_{ZH} , t_{ZL}/t_{HZ} , t_{LZ} : Output Enable and Disable Time

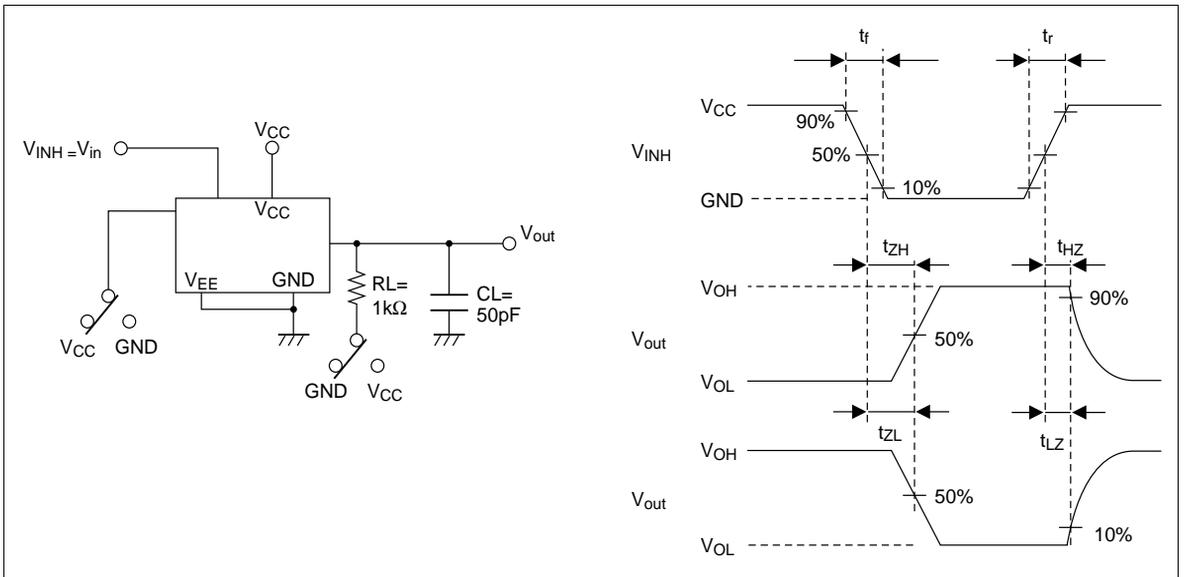


Package Dimensions

Unit: mm

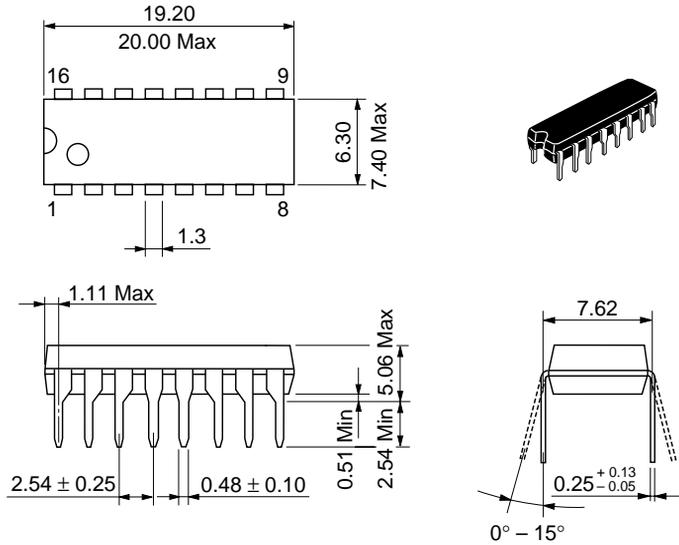

Hitachi Code	DP-16
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	1.07 g

Unit: mm


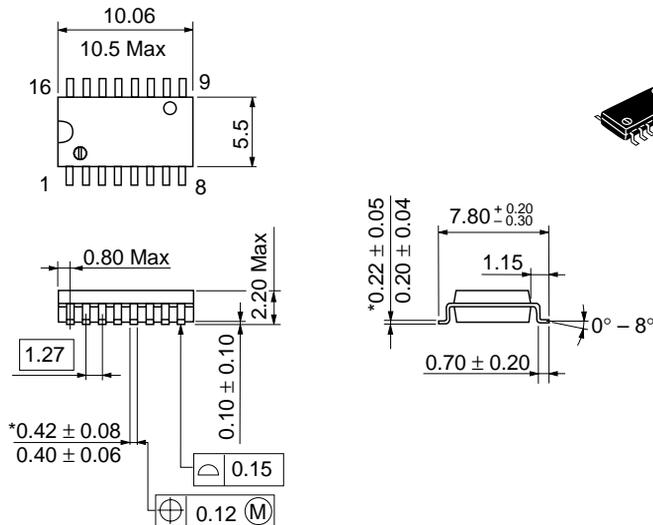


*Dimension including the plating thickness
Base material dimension

Hitachi Code	FP-16DA
JEDEC	—
EIAJ	Conforms
Mass (reference value)	0.24 g

HD74HC4052/HD74HC4053

Unit: mm

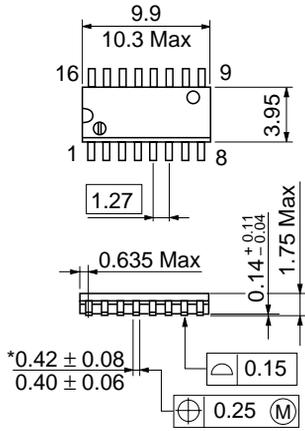

*Dimension including the plating thickness
 Base material dimension

Hitachi Code	FP-16DN
JEDEC	Conforms
EIAJ	Conforms
Mass (reference value)	0.15 g

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.

Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan

Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	:	http://semiconductor.hitachi.com/
	Europe	:	http://www.hitachi-eu.com/hel/ecg
	Asia	:	http://sicapac.hitachi-asia.com
	Japan	:	http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor
(America) Inc.
179 East Tasman Drive,
San Jose, CA 95134
Tel: <1> (408) 433-1990
Fax: <1> (408) 433-0223

Hitachi Europe GmbH
Electronic Components Group
Dornacher Straße 3
D-85622 Feldkirchen, Munich
Germany
Tel: <49> (89) 9 9180-0
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.
Electronic Components Group.
Whitebrook Park
Lower Cookham Road
Maidenhead
Berkshire SL6 8YA, United Kingdom
Tel: <44> (1628) 585000
Fax: <44> (1628) 585160

Hitachi Asia Ltd.
Hitachi Tower
16 Collyer Quay #20-00,
Singapore 049318
Tel : <65>-538-6533/538-8577
Fax : <65>-538-6933/538-3877
URL : <http://www.hitachi.com.sg>

Hitachi Asia Ltd.
(Taipei Branch Office)
4/F, No. 167, Tun Hwa North Road,
Hung-Kuo Building,
Taipei (105), Taiwan
Tel : <886>-(2)-2718-3666
Fax : <886>-(2)-2718-8180
Telex : 23222 HAS-TP
URL : <http://www.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.
Group III (Electronic Components)
7/F., North Tower,
World Finance Centre,
Harbour City, Canton Road
Tsim Sha Tsui, Kowloon,
Hong Kong
Tel : <852>-(2)-735-9218
Fax : <852>-(2)-730-0281
URL : <http://www.hitachi.com.hk>