

LITEON**LTS-3400L SERIES**

T-41-33


0.8" SINGLE DIGIT NUMERIC DISPLAYS**FEATURES**

- 0.8 INCH (20.32mm) DIGIT HEIGHT.
- CONTINUOUS UNIFORM SEGMENTS.
- CHOICE OF FIVE BRIGHT COLORS-RED/BRIGHT RED/GREEN/YELLOW/ORANGE.
- LOW POWER REQUIREMENT.
- EXCELLENT CHARACTERS APPEARANCE.
- HIGH CONTRAST.
- HIGH BRIGHTNESS.
- WIDE VIEWING ANGLE.
- SOLID STATE RELIABILITY.
- CATEGORIZED FOR LUMINOUS INTENSITY.
- I. C. COMPATIBLE.
- EASY MOUNTING ON P.C. BOARD OR SOCKETS.

DESCRIPTION

The LTS-3400L series are 0.8 inch (20.32mm) height single digit displays.


The red series devices utilized LED chips which are made from GaAsP on a GaAs substrate. The bright red and green series devices utilize LED chips which are made from GaP on a transparent GaP substrate. The orange series devices utilize LED chips which are made from GaAsP on a transparent GaP substrate. All devices have gray face and white segment color.

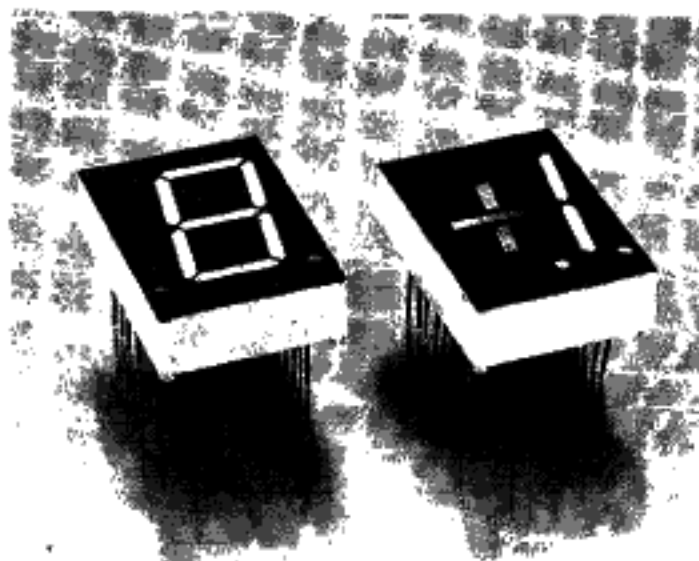SEVEN SEGMENT LED DISPLAYS
& ALPHANUMERIC DISPLAYS**DEVICES**


PART NO. LTS-					DESCRIPTION	PACKAGE DIMENSION	INTERNAL CIRCUIT DIAGRAM
RED	BRIGHT RED	GREEN	YELLOW	ORANGE			
3401LR	3401LP	3401LG	3401LY	3401LE	Common Anode, Rt. & Lt. Hand Decimal	A	A
3403LR	3403LP	3403LG	3403LY	3403LE	Common Cathode, Rt. & Lt. Hand Decimal	A	B
3406LR	3406LP	3406LG	3406LY	3406LE	Universal, ± 1 Overflow, Rt. Hand Decimal	B	C

PACKAGE DIMENSIONS

A. LTS-3401L/3403L

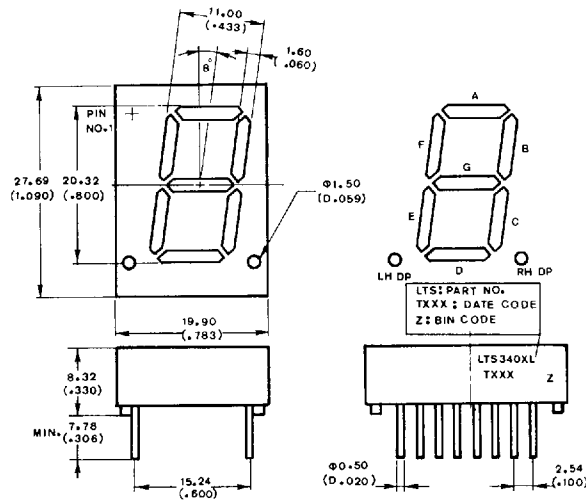

B. LTS-3406L

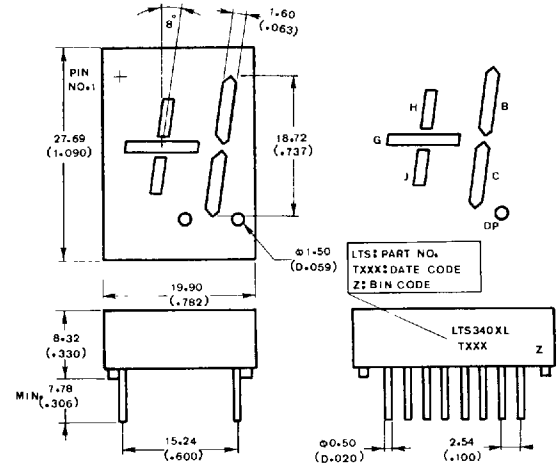

NOTE: All dimensions are in $\frac{\text{millimeters}}{(\text{inches})}$ tolerance are:

- Lead length (from seating plane). minimum value $\frac{+1.00}{-0.00} \text{ mm}$ $\frac{+0.040''}{-0.000''}$
- $\frac{\pm 0.25 \text{ mm}}{(0.010'')}$ unless otherwise noted.


PIN CONNECTION

PIN NO.	CONNECTION		
	A. LTS-3401L	B. LTS-3403L	C. LTS-3406L
1	No Pin	No Pin	No Pin
2	Cathode A	Anode A	Cathode B *2
3	Cathode F	Anode F	Anode H
4	Common Anode *1	Common Cathode *1	Cathode H
5	Cathode E	Anode E	Cathode G
6	Common Anode *1	Common Cathode *1	Cathode J
7	Cathode L.D.P.	Anode L.D.P.	Anode J
8	No Pin	No Pin	Cathode D.P. *3
9	No Pin	No Pin	No Pin
10	Cathode R.D.P.	Anode R.D.P.	Anode D.P.
11	Cathode D	Anode D	Cathode D.P. *3
12	Common Anode *1	Common Cathode *1	Cathode C
13	Cathode C	Anode C	Anode C
14	Cathode G	Anode G	Anode G
15	Cathode B	Anode B	Anode B
16	No Pin	No Pin	No Pin
17	Common Anode *1	Common Cathode *1	Cathode B *2
18	No Pin	No Pin	No Pin


- NOTES
- Pin 2 & 4, 6, 12 & 17 are internally connected
 - Pin 2 & 17 are internally connected.
 - Pin 8 & 11 are internally connected.

INTERNAL CIRCUIT DIAGRAM


A. LTS-3401L x

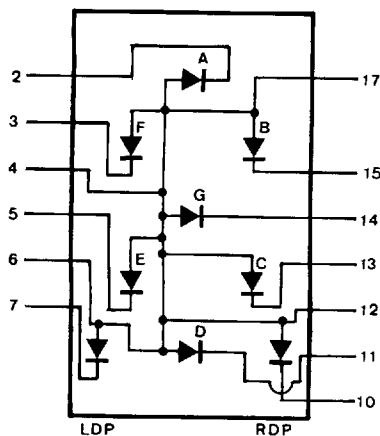

B. LTS-3403L x

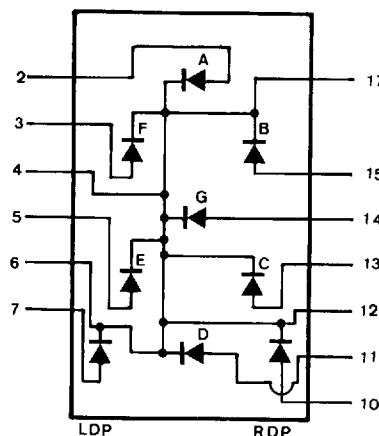

C. LTS-3406L x

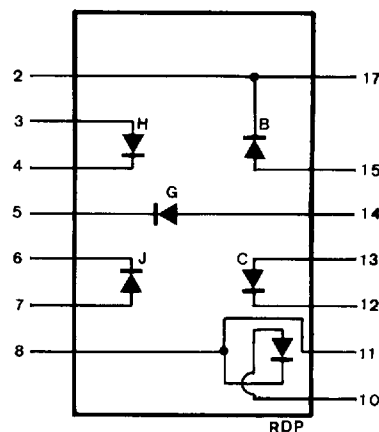

ABSOLUTE MAXIMUM RATINGS AT $T_A = 25^\circ\text{C}$

PARAMETER	RED	BRIGHT RED	GREEN	YELLOW	HI-EFF. RED	UNIT
Power Dissipation Per Segment	55	40	75	60	75	mW
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	160	60	100	80	100	mA
Continuous Forward Current Per Segment	25	15	25	20	25	mA
Derating Linear From 25° C Per Segment	0.3	0.18	0.3	0.24	0.3	mA/°C
Reverse Voltage Per Segment	5	5	5	5	5	V
Operating Temperature Range	- 25° C to + 85° C					
Storage Temperature Range	- 25° C to + 85° C					
Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260° C						

ELECTRICAL/OPTICAL CHARACTERISTICS AT $T_A = 25^\circ\text{C}$ LTS-3400LR SERIES

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I_v	200	600		μcd	$I_F = 10\text{ mA}$
Peak Emission Wavelength	λ_p		655		nm	$I_F = 20\text{ mA}$
Spectral Line Half-Width	$\Delta\lambda$		24		nm	$I_F = 20\text{ mA}$
Forward Voltage, any Segment or D.P.	V_F		1.7	2.0	V	$I_F = 20\text{ mA}$
Reverse Current, any Segment or D.P.	I_R			100	μA	$V_R = 5\text{ V}$
Luminous Intensity Matching Ratio	$I_v\text{-m}$			2:1		$I_F = 20\text{ mA}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)




Fig 1 FORWARD CURRENT Vs FORWARD VOLTAGE




Fig 2 SPECTRAL RESPONSE




Fig 3 RELATIVE LUMINOUS INTENSITY Vs FORWARD CURRENT (PER SEGMENT)




Fig 4 MAX ALLOWABLE DC CURRENT PER SEG Vs AMBIENT TEMPERATURE




Fig 5 MAX PEAK CURRENT Vs DUTY CYCLE % (REFRESH RATE - $F = 1\text{ KHz}$)





Fig 6 LUMINOUS INTENSITY Vs DUTY CYCLE% (AVERAGE $I_F = 10\text{mA}$ PER SEG)

ELECTRICAL/OPTICAL CHARACTERISTICS AT $T_A = 25^\circ\text{C}$ **LTS-3400LP SERIES**


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I_v	300	950		μcd	$I_F = 10\text{ mA}$
Peak Emission Wavelength	λ_p		697		nm	$I_F = 20\text{ mA}$
Spectral Line Half-Width	$\Delta\lambda$		90		nm	$I_F = 20\text{ mA}$
Forward Voltage, any Segment or D.P.	V_F		2.1	2.8	V	$I_F = 20\text{ mA}$
Reverse Current, any Segment or D.P.	I_R			100	μA	$V_R = 5\text{ V}$
Luminous Intensity Matching Ratio	$I_v\text{-m}$			2:1		$I_F = 20\text{ mA}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES


(25°C Ambient Temperature Unless Otherwise Noted)




Forward Voltage (V_F) — Volts
 Fig. 1 FORWARD CURRENT Vs FORWARD VOLTAGE




Wavelength (λ) — nm
 Fig. 2 SPECTRAL RESPONSE



Forward Current (I_F) — mA
 Fig. 3 RELATIVE LUMINOUS INTENSITY Vs FORWARD CURRENT (PER SEGMENT)



Ambient Temperature (T_A) — $^\circ\text{C}$
 Fig. 4 MAX. ALLOWABLE DC CURRENT PER SEG Vs AMBIENT TEMPERATURE




Duty Cycle %
 Fig. 5 MAX. PEAK CURRENT Vs DUTY CYCLE % (REFRESH RATE $F = 1\text{ KHz}$)

ELECTRICAL/OPTICAL CHARACTERISTICS AT $T_A = 25^{\circ}\text{C}$ **LTS-3400LG SERIES**


PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Average Luminous Intensity	I_v	800	2400		μcd	$I_f = 10\text{ mA}$
Peak Emission Wavelength	λ_p		565		nm	$I_f = 20\text{ mA}$
Spectral Line Half-Width	$\Delta\lambda$		30		nm	$I_f = 20\text{ mA}$
Forward Voltage, any Segment or D.P.	V_f		2.1	2.8	V	$I_f = 20\text{ mA}$
Reverse Current, any Segment or D.P.	I_R			100	μA	$V_R = 5\text{ V}$
Luminous Intensity Matching Ratio	I_{v-m}			2:1		$I_f = 20\text{ mA}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES


(25°C Ambient Temperature Unless Otherwise Noted)




Forward Voltage (V_f) — Volts
 Fig 1 FORWARD CURRENT Vs FORWARD VOLTAGE




Wavelength (λ) — nm
 Fig 2 SPECTRAL RESPONSE




Forward Current (I_f) — mA
 Fig 3 RELATIVE LUMINOUS INTENSITY Vs FORWARD CURRENT (PER SEGMENT)



Ambient Temperature (T_A) — $^{\circ}\text{C}$
 Fig 4 MAX ALLOWABLE DC CURRENT PER SEG Vs AMBIENT TEMPERATURE



Duty Cycle %
 Fig 5 MAX PEAK CURRENT Vs DUTY CYCLE % (REFRESH RATE — $F = 1\text{ KHz}$)




Duty Cycle %
 Fig 6 LUMINOUS INTENSITY Vs DUTY CYCLE % (AVERAGE $I_f = 10\text{ mA}$ PER SEG)

ELECTRICAL/OPTICAL CHARACTERISTICS AT $T_A = 25^\circ\text{C}$ LTS-3400LY SERIES


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I_v	750	2400		μcd	$I_f = 10\text{ mA}$
Peak Emission Wavelength	λ_p		585		nm	$I_f = 20\text{ mA}$
Spectral Line Half-Width	$\Delta\lambda$		35		nm	$I_f = 20\text{ mA}$
Forward Voltage, any Segment or D.P.	V_f		2.1	2.8	V	$I_f = 20\text{ mA}$
Reverse Current, any Segment or D.P.	I_R			100	μA	$V_R = 5\text{V}$
Luminous Intensity Matching Ratio	$I_v\text{-}m$			2:1		$I_f = 20\text{ mA}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES


(25°C Ambient Temperature Unless Otherwise Noted)




Forward Voltage (V_f) — Volts
Fig 1 FORWARD CURRENT VS FORWARD VOLTAGE




Wavelength (λ) — nm
Fig 2 SPECTRAL RESPONSE




Forward Current (I_f) — mA
Fig 3 RELATIVE LUMINOUS INTENSITY VS FORWARD CURRENT (PFR SEGMENT)



Ambient Temperature (T_A) — $^\circ\text{C}$
Fig 4 MAX ALLOWABLE DC CURRENT PER SEG Vs AMBIENT TEMPERATURE



Duty Cycle %
Fig 5 MAX PEAK CURRENT VS DUTY CYCLE % (REFRESH RATE — F — 1 KHz)



Duty Cycle %
Fig 6 LUMINOUS INTENSITY VS DUTY CYCLE % (AVERAGE $I_f = 10\text{mA}$ PER SEG)


ELECTRICAL/OPTICAL CHARACTERISTICS AT $T_A = 25^\circ\text{C}$

LTS-3400LE SERIES


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I_v	800	2400		μcd	$I_F = 10\text{ mA}$
Peak Emission Wavelength	λ_p		630		nm	$I_F = 20\text{ mA}$
Spectral Line Half-Width	$\Delta\lambda$		40		nm	$I_F = 20\text{ mA}$
Forward Voltage, any Segment or D.P.	V_F		2.1	2.8	V	$I_F = 20\text{ mA}$
Reverse Current, any Segment or D.P.	I_R			100	μA	$V_R = 5\text{ V}$
Luminous Intensity Matching Ratio	$I_v\text{-m}$			2:1		$I_F = 20\text{ mA}$

TYPICAL ELECTRICAL/OPTICAL CHARACTERISTIC CURVES


(25°C Ambient Temperature Unless Otherwise Noted)




Forward Voltage (V_F) — Volts
Fig 1 FORWARD CURRENT Vs FORWARD VOLTAGE




Wavelength (λ) — nm.
Fig 2 SPECTRAL RESPONSE




Forward Current (I_F) — mA
Fig 3 RELATIVE LUMINOUS INTENSITY Vs FORWARD CURRENT (PER SEGMENT)



Ambient Temperature (T_A) — $^\circ\text{C}$
Fig 4 MAX. ALLOWABLE DC CURRENT PER SEG Vs AMBIENT TEMPERATURE



Duty Cycle %
Fig 5 MAX. PEAK CURRENT Vs DUTY CYCLE % (REFRESH RATE — $F = 1\text{ KHz}$)



Duty Cycle %
Fig 6 LUMINOUS INTENSITY Vs DUTY CYCLE % (AVERAGE $I_F = 10\text{ mA PER SEG}$)