
HD66115T

(160-Channel Common Driver Packaged
in a Slim Tape Carrier Package)

HITACHI

ADE-207-282(Z)
'99.9
Rev. 0.0

Description

The HD66115T is a common driver for large dot matrix liquid crystal graphics displays. It features 160 channels which can be divided into two groups of 80 channels by selecting data input/output pins. The driver is powered by about 3 V, making it suitable for the design of portable equipment which fully utilizes the low power dissipation of liquid crystal elements. The HD66115T, packaged in a slim tape carrier package (slim-TCP), makes it possible to reduce the size of the user area (wiring area).

Features


- Duty cycle: About 1/100 to 1/480
- 160 LCD drive circuits
- High LCD driving voltage: 14V to 40V
- Output division function (2 × 80-channel outputs)
- Display off function
- Operating voltage: 2.5V to 5.5V
- Slim-TCP
- Low output impedance: 0.7 kΩ (typ)

Ordering Information

Type No.	Outer Lead Pitch (μm)
HD66115TA0	180
HD66115TA3	250

Note: The details of TCP pattern are shown in "The Information of TCP."

Pin Arrangement

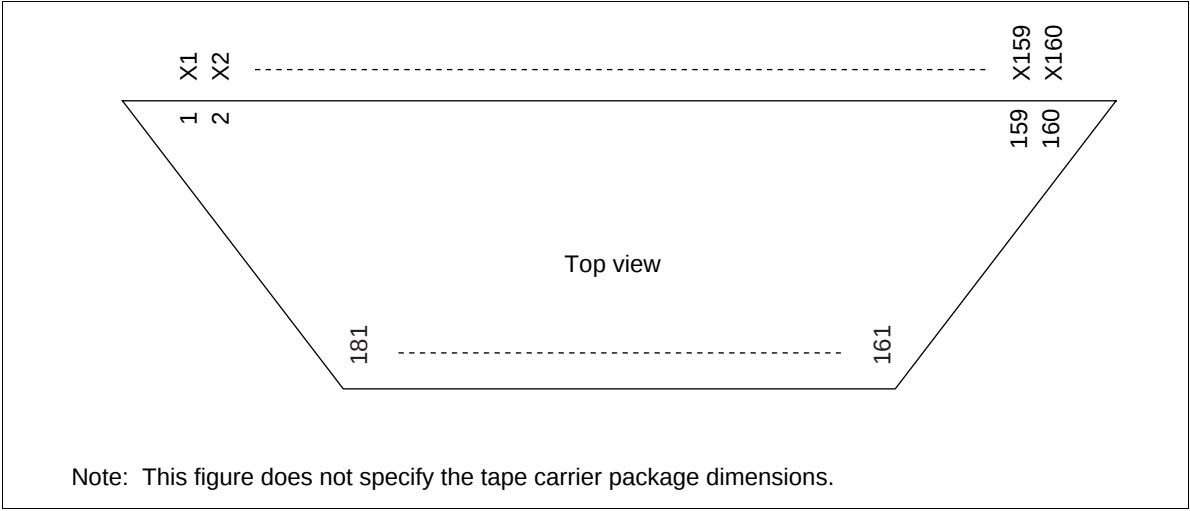

Pin Assignments

V2L	V5L	V6L	V1L	VLCD1	GND1	CH	SHL	<u>DISPOFF</u>	M	CL	GND2	DIO1	DI	DIO2	V _{CC}	V1R	V6R	VLCD2	V5R	V2R
181	180	179	178	177	176	175	174	173	172	171	170	169	168	167	166	165	164	163	162	161

Pin Descriptions

Symbol	Pin No.	Pin Name	Input/Output	Classification
VLCD1, 2	177, 163	VLCD	—	Power supply
V _{CC}	166	V _{CC}	—	Power supply
GND1, 2	176, 170	GND	—	Power supply
V1L, V1R	178, 165	V1L, V1R	Input	Power supply
V2L, V2R	181, 161	V2L, V2R	Input	Power supply
V5L, V5R	180, 162	V5L, V5R	Input	Power supply
V6L, V6R	179, 164	V6L, V6R	Input	Power supply
CL	171	Clock	Input	Control signal
M	172	M	Input	Control signal
CH	175	CH	Input	Control signal
SHL	174	Shift left	Input	Control signal
DIO1	169	Data	Input/output	Control signal
DIO2	167	Data	Input/output	Control signal
DI	168	Data	Input	Control signal
DISPOFF	173	Display off	Input	Control signal
X1–X160	1–160	X1–X160	Output	LCD drive output

Pin Functions

Power Supply

V_{CC}, GND: Supply power to the internal logic circuits.

VLCD, GND: Supply power to the LCD drive circuits (Figure 1).

V1L, V1R, V2L, V2R, V5L, V5R, V6L, V6R: Supply different power levels to drive the LCD. V1 and V2 are selected levels, and V5 and V6 are non-selected levels.

Control Signals

CL: Inputs data shift clock pulses for the shift register. At the falling edge of each CL pulse, the shift register shifts data input via the DIO pins.

M: Changes the LCD drive outputs to AC.

CH: Selects the data shift mode. (CH = high: 2 × 80-output mode, CH = low: 160-output mode)

SHL: Selects the data shift direction for the shift register and the common signal scan direction (Figure 2).

DIO1, DIO2: Input or output data. DIO1 is input and DIO2 is output when SHL is high. DIO1 is output and DIO2 is input when SHL is low.

DI: Input data. DI is input to X81–X160 when CH and SHL are high, and to X81–X1 when SHL is low.

$\overline{\text{DISPOFF}}$: Controls LCD output level. A low $\overline{\text{DISPOFF}}$ sets the LCD drive outputs X1–X160 to the V2 level. A high $\overline{\text{DISPOFF}}$ is normally used.

LCD Drive Outputs

X1–X160: Each X outputs one of four voltage levels V1, V2, V5, or V6, depending on the combination of the M signal and the data level (Figure 3).




Figure 1 Power Supply for LCD Driver

SHL	Data shift direction
High	Shift to right DIO1 → SR1 → SR2 → SR3 ••• → SR160 → DIO2
Low	Shift to left DIO2 → SR160 → SR159 ••• → SR1 → DIO1

Note: SR1 to SR160 correspond to the outputs of X1 to X160, respectively.

Figure 2 Selection of Data Shift Direction and Common Signal Scan Direction by SHL


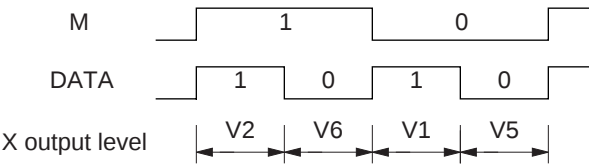


Figure 3 Selection of LCD Drive Output Level

Block Diagram

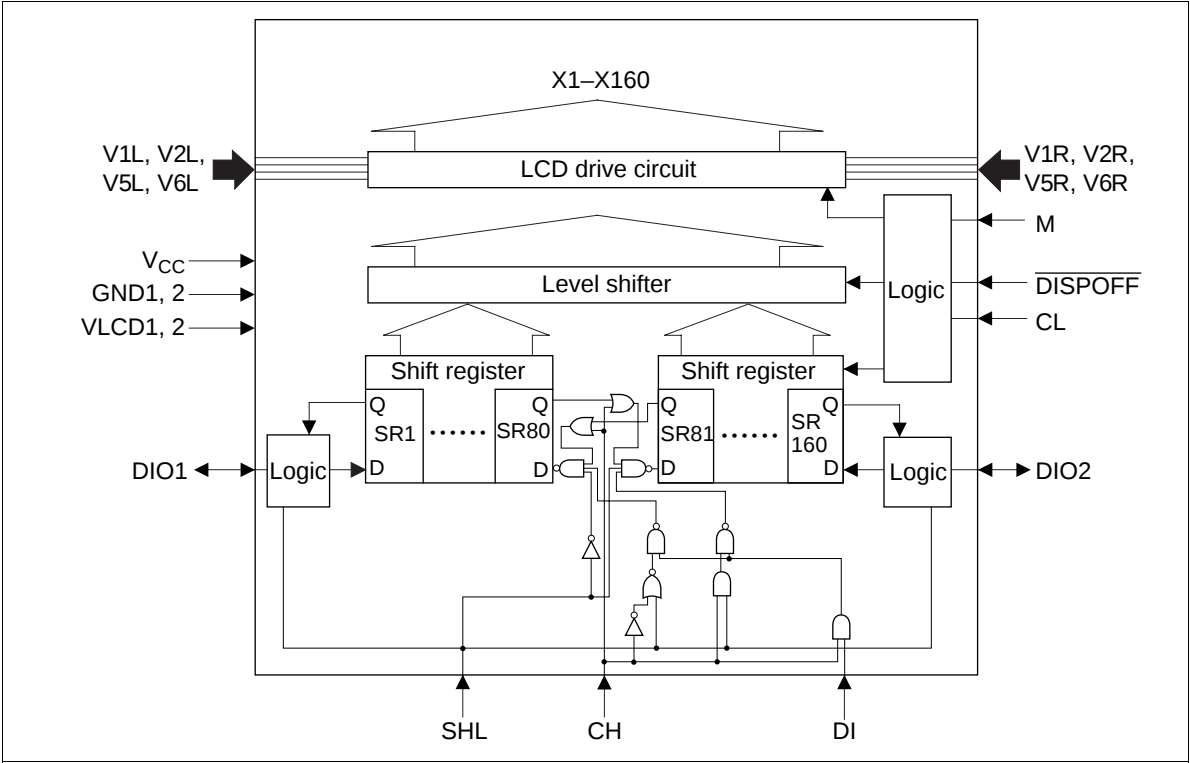

Block Functions

LCD Drive Circuit

The 160-bit LCD drive circuit generates four voltage levels V1, V2, V5, and V6, which drive the LCD panel. One of these four levels is output to the corresponding X pin, depending on the combination of the M signal and the data in the shift register.

Level Shifter

The level shifter changes logic control signals (2.5V–5.5V) into high-voltage signals for the LCD drive circuit.

Shift Register

The 160-bit shift register shifts the data input via the DIO pin by one bit at a time. The one bit of shifted-out data is output from the DIO pin to the next driver IC. Both actions occur simultaneously at the falling edge of each shift clock (CL) pulse. The SHL pin selects the data shift direction.

Absolute Maximum Ratings

Item	Symbol	Rating	Unit	Notes
Power supply voltage for logic circuits	V _{cc}	−0.3 to +7.0	V	1, 5
Power supply voltage for LCD drive circuits	VLCD	−0.3 to +42	V	1, 5
Input voltage 1	VT1	−0.3 to V _{cc} + 0.3	V	1, 2
Input voltage 2	VT2	VLCD − 7.0 to VLCD + 0.3	V	1, 3
Input voltage 3	VT3	−0.3 to +7.0	V	1, 4
Operating temperature	T _{opr}	−30 to +75	°C	
Storage temperature	T _{stg}	−55 to +110	°C	

- Notes:
- 1. The reference point is GND (0V).
 - 2. Applies to pins CL, M, SHL, DI, $\overline{\text{DISPOFF}}$, and CH.
 - 3. Applies to pins V1 and V6.
 - 4. Applies to pins V2 and V5.
 - 5. Power should be applied to V_{cc}–GND first, and then VLCD–GND. It should be disconnected in the reverse order.
 - 6. If the LSI is used beyond its absolute maximum ratings, it may be permanently damaged. It should always be used within its specified operating range in order to prevent malfunctions or loss of reliability.

Electrical Characteristics

DC Characteristics ($V_{CC} = 2.5$ to $5.5V$, $GND = 0V$, $VLCD-GND = 14$ to $40V$, and $T_a = -30$ to $+75^\circ C$, unless otherwise noted)

Item	Symbol	Pins	Min	Typ	Max	Unit	Test Condition	Notes
Input high voltage	V_{IH}	1	$0.8 \times V_{CC}$	—	V_{CC}	V		
Input low voltage	V_{IL}	1	0	—	$0.2 \times V_{CC}$	V		
Output high voltage	V_{OH}	2	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -0.4$ mA	
Output low voltage	V_{OL}	2	—	—	0.4	V	$I_{OL} = 0.4$ mA	
V_i – X_j on resistance	R_{ON}	3	—	0.7	1.0	k Ω	$I_{ON} = 150$ μA	1
Input leakage current 1	I_{IL1}	1	–5	—	5	μA	$V_{IN} = V_{CC}$ to GND	
Input leakage current 2	I_{IL2}	4	–25	—	25	μA	$V_{IN} = VLCD$ to GND	
Current consumption 1	I_{GND}	—	—	—	0.5	mA	$f_{CL} = 36$ kHz $f_M = 75$ kHz	2
Current consumption 2	I_{LCD}	—	—	—	1.0	mA		

Note: Pins: 1. CL, M, SHL, CH, DI, DIO1, DIO2, DISPOFF

2. DIO1, DIO2

3. X1–X160, V

4. V1, V2, V5, V6

Notes: 1. Indicates the resistance between one of the pins X1–X160 and one of the voltage supply pins V1, V2, V5, or V6, when load current is applied to the X pin; defined under the following conditions:

$T_a = 25^\circ C$ Note that R_{ON} depends on T_a ($^\circ C$) (Figure 4).

$VLCD-GND = 40V$

$V1, V6 = V_{LCD} - \{1/20 (VLCD-GND)\}$

$V5, V2 = GND + \{1/20 (VLCD-GND)\}$

All voltages must be within ΔV , $VLCD \geq V1 \geq V6 \geq VLCD - 7.0V$, and $7.0V \geq V5 \geq V2 \geq GND$.

Note that ΔV depends on the power supply voltage $VLCD-GND$ (Figure 6).

2. Input and output currents are excluded. When a CMOS input is left floating, excess current flows from the power supply through the input circuit. To avoid this, V_{IH} and V_{IL} must be held at V_{CC} and GND, respectively.

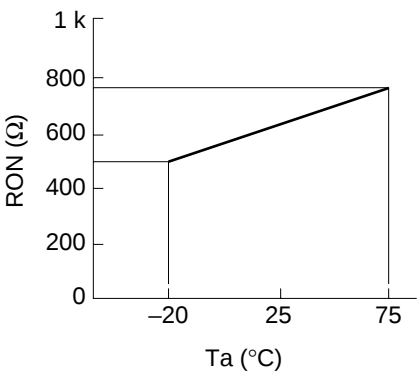


Figure 4 Relation between RON and Ta

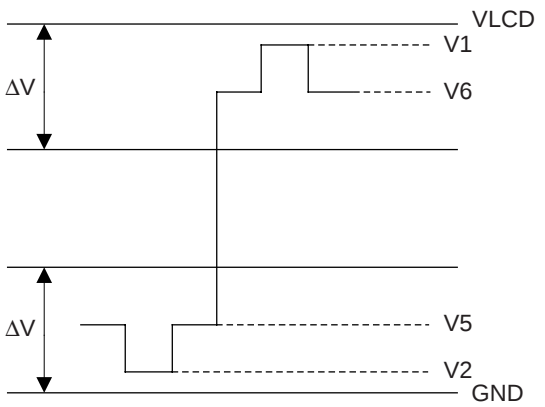


Figure 5 Relation between Driver Output Waveform and Voltage Levels

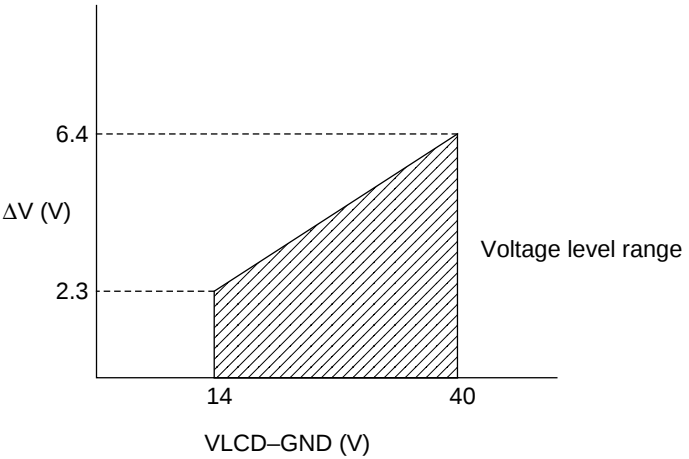


Figure 6 Relation between VLCD-GND and DV

AC Characteristics ($V_{CC} = 2.5$ to $5.5V$, $GND = 0V$, and $T_a = -30$ to $+75^\circ C$, unless otherwise noted)

Item	Symbol	Pins	Min	Max	Unit	Notes
Clock cycle time	t_{CYC}	CL	400	—	ns	
Clock high-level width	t_{CWH}	CL	30	—	ns	
Clock low-level width	t_{CWL}	CL	370	—	ns	
Clock rise time	t_r	CL	—	30	ns	
Clock fall time	t_f	CL	—	30	ns	
Data setup time	t_{DS}	DI, DIO1, DIO2, CL	100	—	ns	
Data hold time	t_{DH}	DI, DIO1, DIO2, CL	30	—	ns	
Data output delay time	t_{DD}	DIO1, DIO2, CL	—	350	ns	1
M phase difference	t_M	M, CL	−300	300	ns	
Output delay time 1	t_{pd1}	X (n), CL	—	1.2	μs	2
Output delay time 2	t_{pd2}	X (n), M	—	1.2	μs	2

AC Characteristics ($V_{CC} = 5.0V \pm 10\%$, $GND = 0V$, and $T_a = -30$ to $+75^\circ C$, unless otherwise noted)

Item	Symbol	Pins	Min	Max	Unit	Notes
Clock cycle time	t_{CYC}	CL	400	—	ns	
Clock high-level width	t_{CWH}	CL	30	—	ns	
Clock low-level width	t_{CWL}	CL	370	—	ns	
Clock rise time	t_r	CL	—	30	ns	
Clock fall time	t_f	CL	—	30	ns	
Data setup time	t_{DS}	DI, DIO1, DIO2, CL	100	—	ns	
Data hold time	t_{DH}	DI, DIO1, DIO2, CL	30	—	ns	
Data output delay time	t_{DD}	DIO1, DIO2, CL	—	150	ns	1
M phase difference	t_M	M, CL	−300	300	ns	
Output delay time 1	t_{pd1}	X (n), CL	—	0.7	μs	2
Output delay time 2	t_{pd2}	X (n), M	—	0.7	μs	2

Note: 1, 2 The load circuit shown in Figure 7 is connected.




Figure 7 Load Circuit


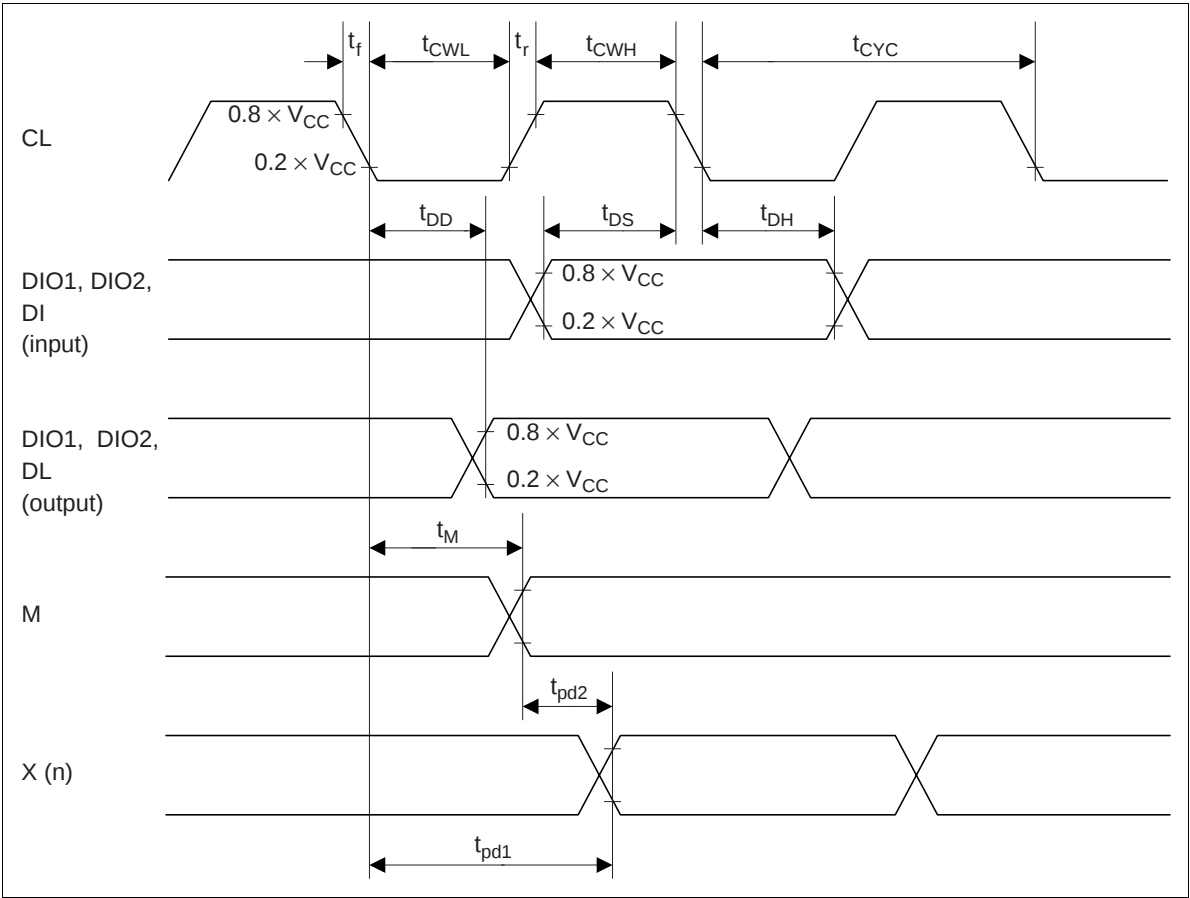


Figure 8 LCD Controller Interface Timing

Operation Timing (1/480 Duty Cycle)

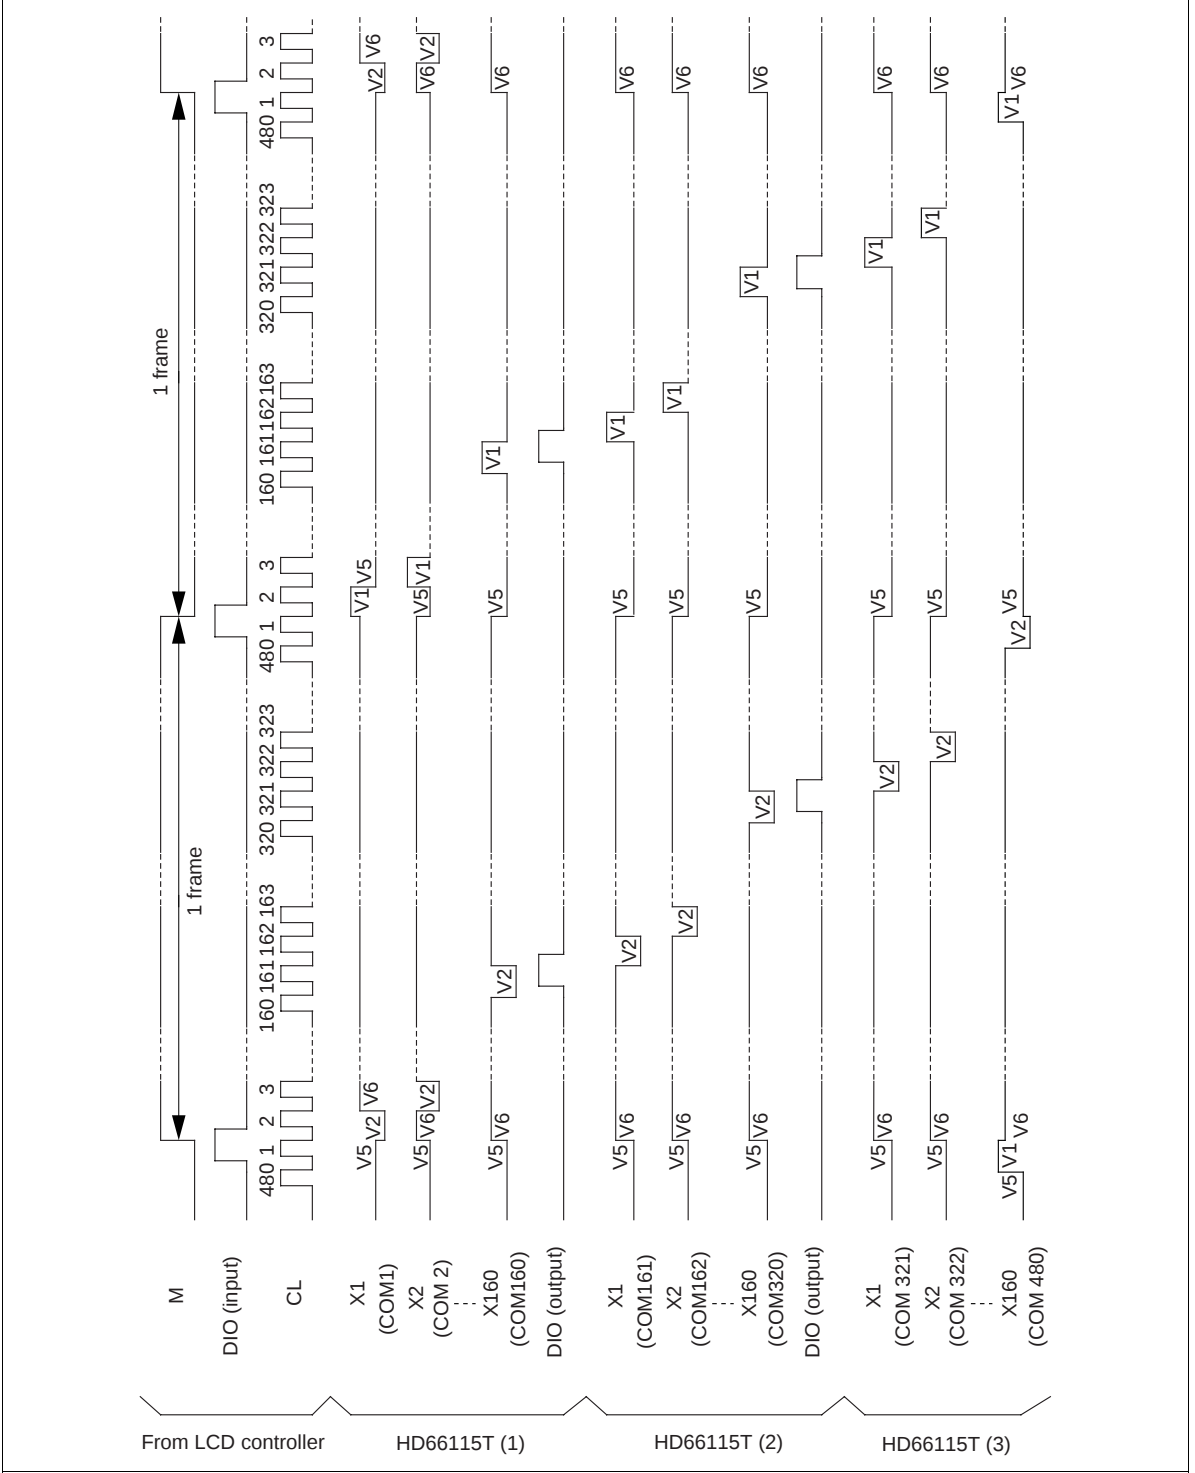

Connection Examples

Figures 9 and 10 show examples of how HD66115Ts can be configured to drive a 480-line LCD panel with a 1/240 duty cycle. Figures 11 and 12 show examples of how HD66115Ts can be configured to drive a 480-line LCD panel with a 1/480 duty cycle. The HD66115T's 160 channels can be divided into two groups of 80 channels, and its data shift direction can be changed by selecting the data output mode pin (CH) and data shift pin (SHL), respectively.

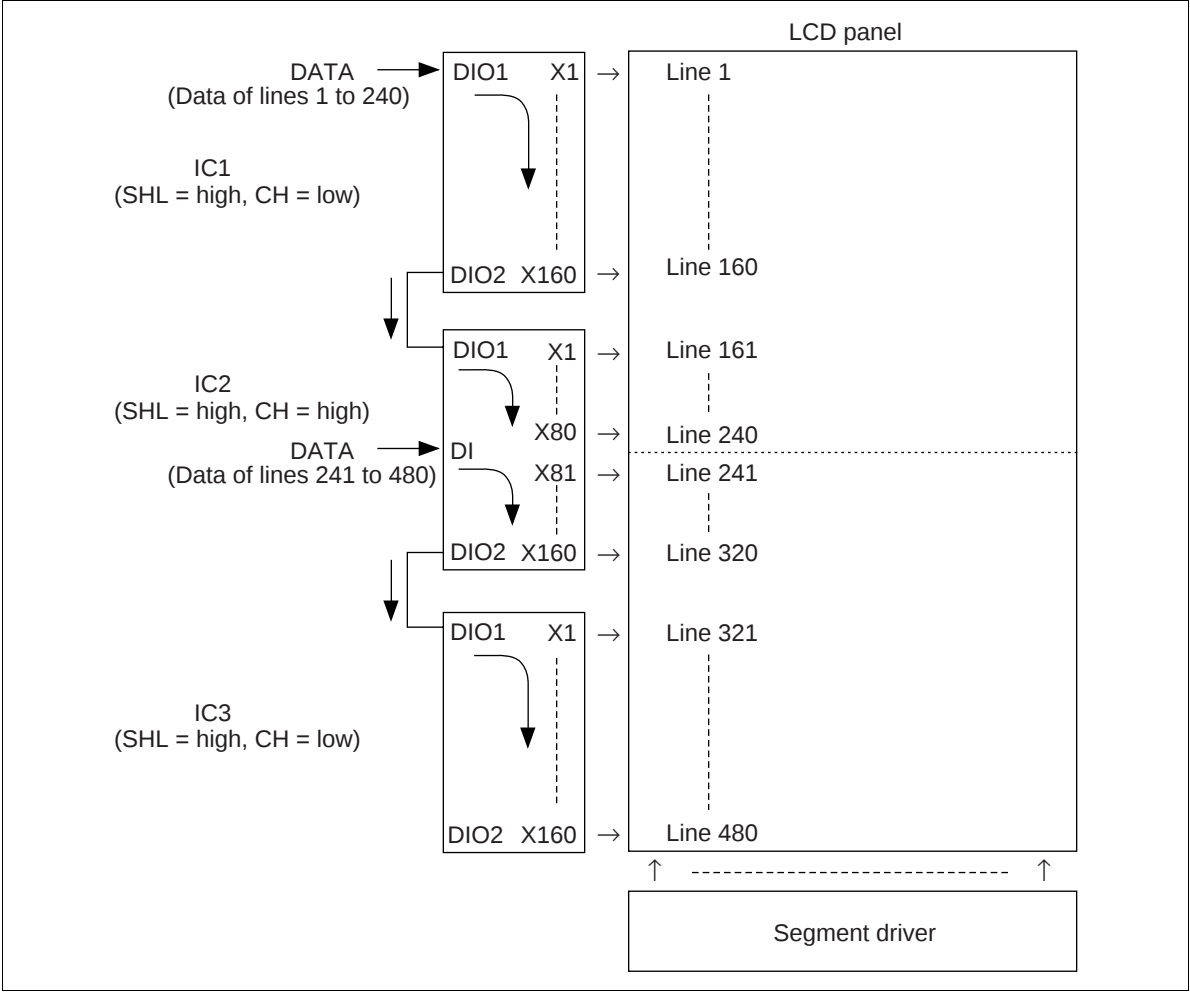


Figure 9 Dual-Screen Configuration of a 480-Line LCD Panel with a 1/240 Duty Cycle (1)

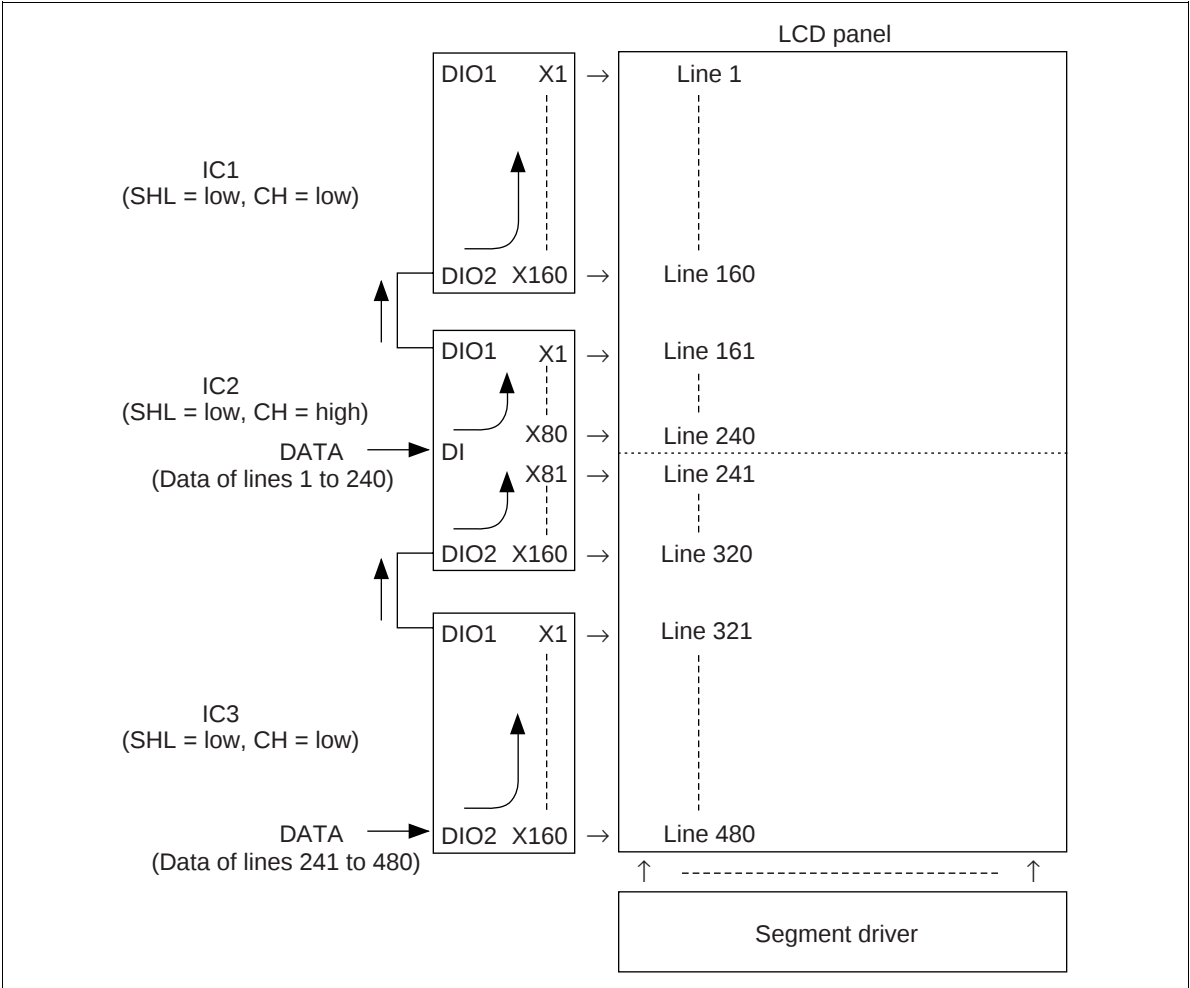


Figure 10 Dual-Screen Configuration of a 480-Line LCD Panel with a 1/240 Duty Cycle (2)

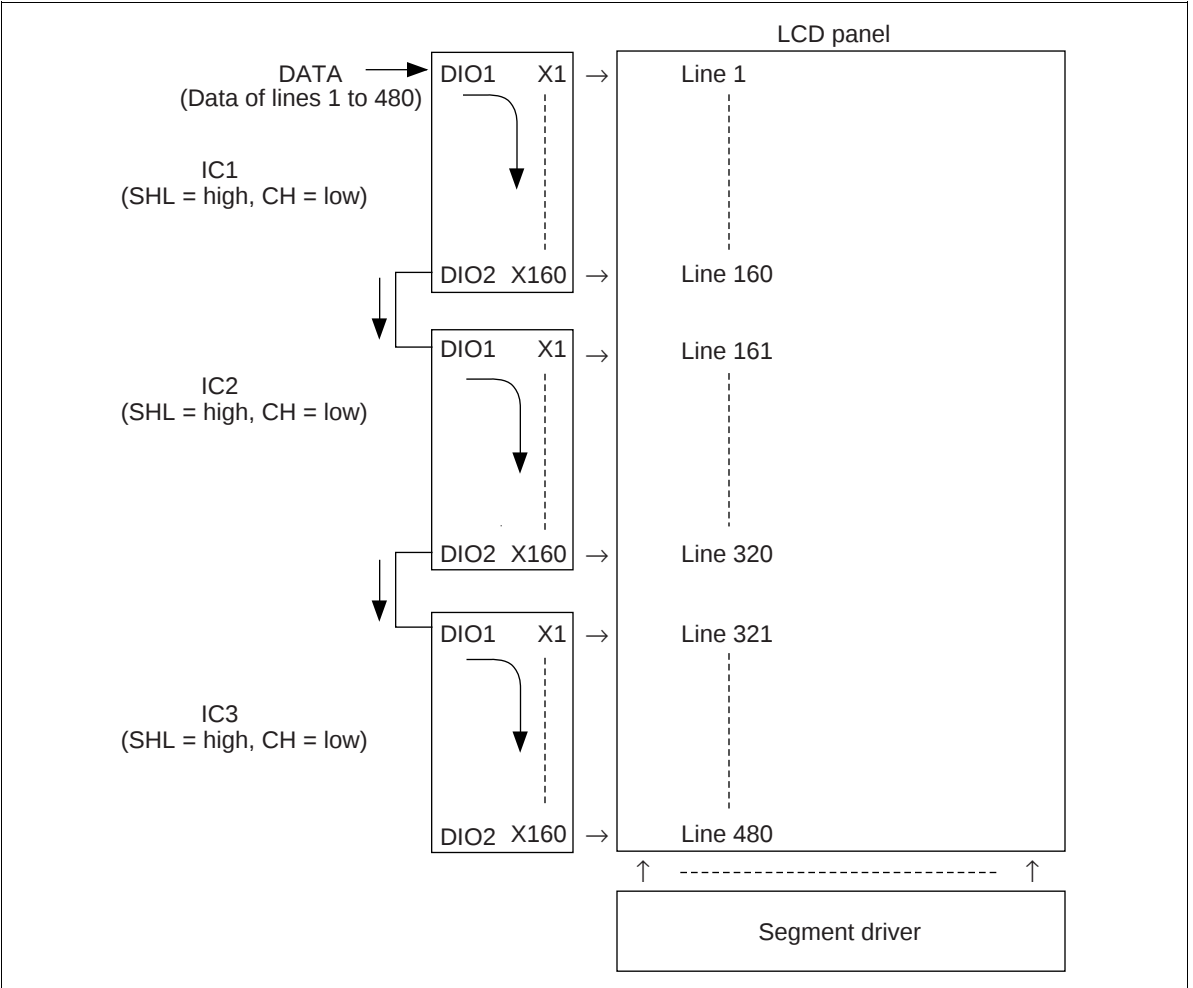


Figure 11 Single-Screen Configuration of a 480-Line LCD Panel with a 1/480 Duty Cycle (1)

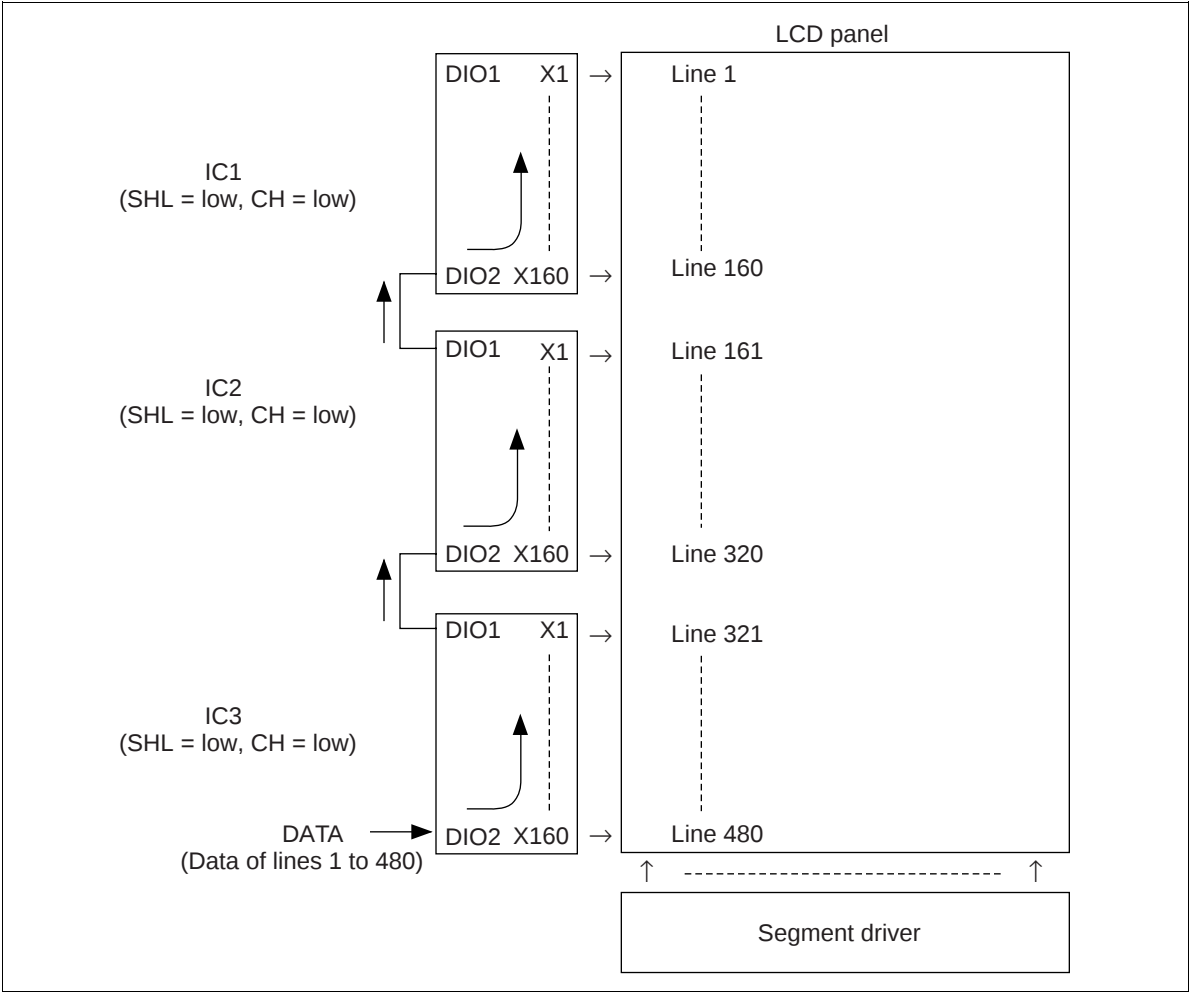


Figure 12 Single-Screen Configuration of a 480-Line LCD Panel with a 1/480 Duty Cycle (2)

Notes on Power-On/Off of the LCD Driver

To prevent an LCD driver display error at power on/off, the sequence for power-on signal activation must be as follows (see Figure 13):

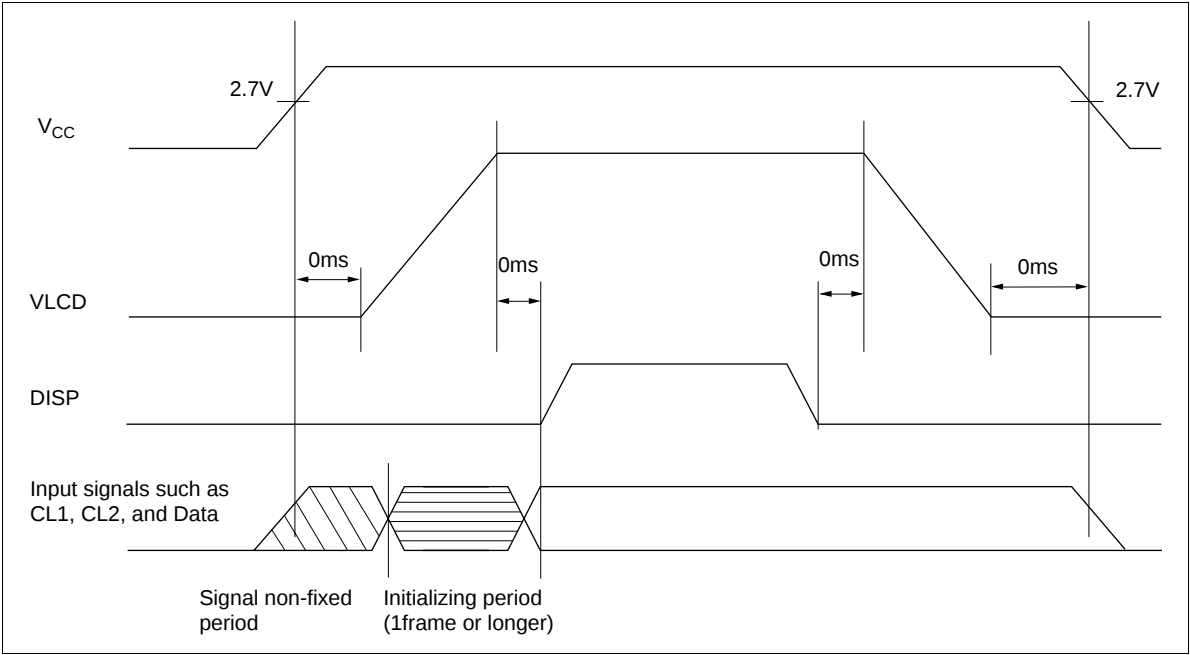


Figure 13 Sequence of Power-On/Off

At Power On

- (1) Power on V_{CC} . At this time, input 0 to the $\overline{\text{DISP}}$ pin.
- (2) Display-off function forces the LCD driver to output a V2 level (lowest level).
- (3) Display-off function takes priority even if the input signal status becomes irregular immediately after V_{CC} power-on.
- (4) Input the specified signals to initialize registers of the LCD driver. Its period must be 1 frame or longer.
- (5) Set the $\overline{\text{DISP}}$ level to 1 to cancel display-off function after steps (1) to (4). At this time, VLCD and each V pin input must be at the specified levels.

At Power Off

Basically, the power-off procedure is the reverse of the power-on procedure.

- (1) Set the $\overline{\text{DISP}}$ level to 0.
- (2) Lower LCD driver power supply to 0V
- (3) Lower V_{CC} and each input signals to 0V

At this time, each V pin input must be at 0V. Display-off function stops when V_{CC} falls to 0V, and therefore, the LCD driver may output a level other than V2 (lowest level). As a result, a display error may be caused at power-off or power-on.

LCD Driver LSI Power Supply Pin Connection

A feature of the LCD driver is the LCD drive power supply. As the number of pixel drives per LSI increases, so does the voltage and number of outputs.

Consequently, if multi-output CMOS circuits are switched simultaneously, a wiring voltage drop may occurs due to transient currents, and the potential between the LCD drive circuit power supply (V_{LCD}) and LCD drive level power supplies (V1, V6, and V3) or GND and the LCD level power supplies (V2, V5, and V4) may be inverted, resulting in latchup breakdown. To prevent this, it is recommended that, when designing the LCD drive power supply and board power supply wiring, the power supply wiring be designed as low-impedance and capacitors be inserted in the wiring between V_{LCD} and V1, V3, V6, and between V2, V4, V5 and GND. In set evaluation, it is recommended that a check be carried out to confirm that there is no inversion of the LCD drive power supply and level power supplies in the period between when the LCD drive power supply is turned on and turned off.

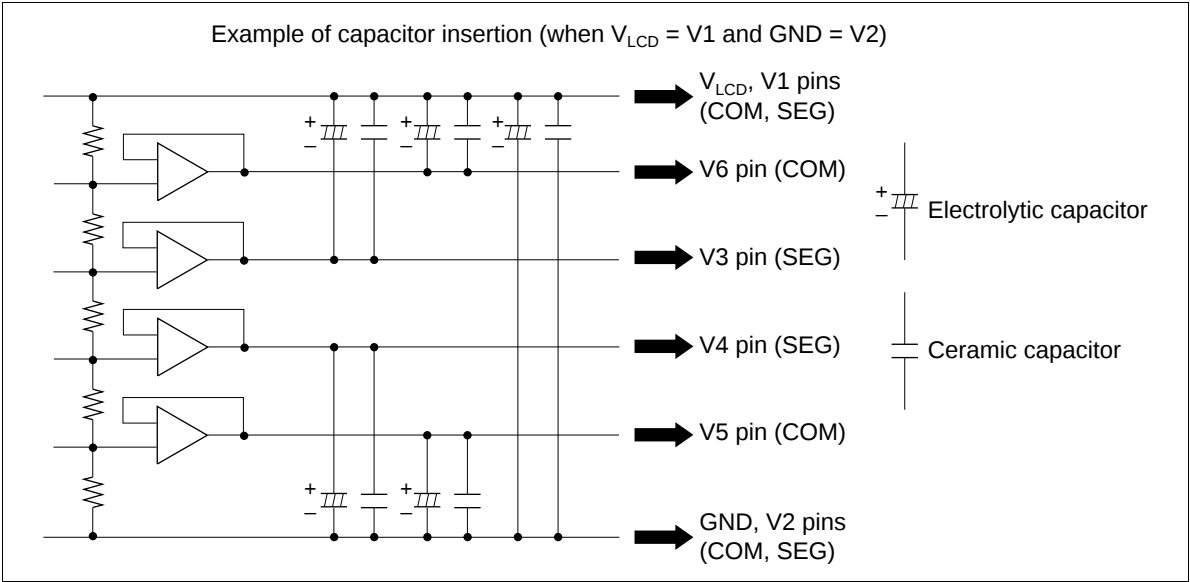


Figure 14 Example of Capacitor Insertion

Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits.
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL	NorthAmerica	: http://semiconductor.hitachi.com/
	Europe	: http://www.hitachi-eu.com/hel/ecg
	Asia (Singapore)	: http://www.has.hitachi.com.sg/grp3/sicd/index.htm
	Asia (Taiwan)	: http://www.hitachi.com.tw/E/Product/SICD_Frame.htm
	Asia (HongKong)	: http://www.hitachi.com.hk/eng/bo/grp3/index.htm
	Japan	: http://www.hitachi.co.jp/Sicd/indx.htm

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive, San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1> (408) 433-0223	Hitachi Europe GmbH Electronic components Group Dornacher Straße 3 D-85622 Feldkirchen, Munich Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00 Hitachi Europe Ltd. Electronic Components Group. Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 778322
--	---

Hitachi Asia Pte. Ltd. 16 Collyer Quay #20-00 Hitachi Tower Singapore 049318 Tel: 535-2100 Fax: 535-1533 Hitachi Asia Ltd. Taipei Branch Office 3F, Hung Kuo Building, No.167, Tun-Hwa North Road, Taipei (105) Tel: <886> (2) 2718-3666 Fax: <886> (2) 2718-8180	Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower, World Finance Centre, Harbour City, Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: <852> (2) 735 9218 Fax: <852> (2) 730 0281 Telex: 40815 HITEC HX
--	--

Copyright © Hitachi, Ltd., 1998. All rights reserved. Printed in Japan.