


MAX POWER 22W BTL×4CH AUDIO POWER IC

The KIA8255AH is 4ch BTL audio power amplifier for consumer application. It is designed low distortion ratio for 4ch BTL audio power amplifier, built-in stand-by function, muting function and junction temperature detection circuit. Additionally, the AUX. amplifier is built-in, it can make the beep signal etc. output to 2 channels (OUT1 and 4). It contains various kind of protectors for car audio.

FEATURES

- High Power
 - : $P_{OUT(MAX)}=22W(Typ.)$
($V_{CC}=13.7V$, $f=1kHz$, $R_L=4\Omega$)
 - : $P_{OUT(1)}=17W(Typ.)$
($V_{CC}=14.4V$, $f=1kHz$, $THD=10\%$, $R_L=4\Omega$)
 - : $P_{OUT(2)}=14W(Typ.)$
($V_{CC}=13.2V$, $f=1kHz$, $THD=10\%$, $R_L=4\Omega$)
- Low Distortion Ratio
 - : $THD=0.02\%(Typ.)$
($V_{CC}=13.2V$, $f=1kHz$, $P_{out}=3W$, $R_L=4\Omega$)
- Low Noise
 - : $V_{NO}=0.10mV_{rms}(Typ.)$
($V_{CC}=13.2V$, $R_g=0\Omega$, $G_v=34dB$, $BW=20\sim 20kHz$)
- Built-in stand-by switch function (Pin ②)
- Built-in muting function (Pin ①, ⑫)
- Built-in AUX. amplifier from single input to 2 channels output (Pin ⑩)
- Built-in junction temperature detection circuit (Pin ⑭)
 - : Pin ⑭ DC voltage rises at about $+10mV/^{\circ}C$ in proportion to junction temperature.
- Built-in various protection circuit.
 - : Thermal shut down, over voltage, out to GND, out to V_{CC} , out to out short.
- Operating supply voltage.
 - : $V_{CC(opr)}=9\sim 18V$.

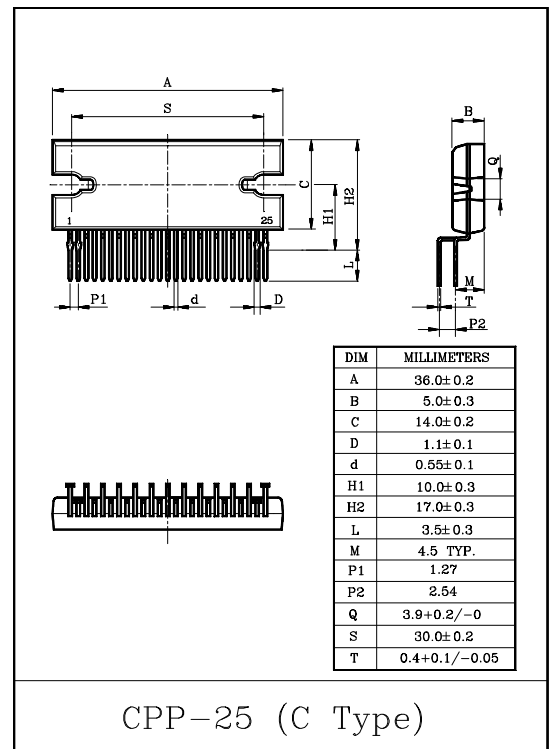

KIA8255AH

MAXIMUM RATINGS (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Peak Supply Voltage (0.2sec)	V _{CC} (surge)	50	V
DC Supply Voltage	V _{CC} (DC)	25	V
Operating Supply Voltage	V _{CC} (opr)	18	V
Output Current (Peak)	I _O (peak)	9	A
Power Dissipation	P _D (Note)	83	W
Operating Temperature	T _{opr}	-40~85	℃
Storage Temperature	T _{stg}	-55~150	℃

Note) Package thermal resistance $\theta_{j-T}=1.5^{\circ}\text{C/W}$ (Typ.)
(Ta=25℃, with infinite heat sink)

ELECTRICAL CHARACTERISTICS

(Unless otherwise specified, V_{CC}=13.2V, R_L=4Ω, f=1kHz, Ta=25℃)


CHARACTERISTIC	SYMBOL	TEST CIRCUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Quiescent Current	I _{CCQ}	—	V _{IN} =0	—	200	400	mA
Output Power	P _{OUT} MAX	—	V _{CC} =13.7V, MAX power	—	22	—	W
	P _{OUT} (1)	—	V _{CC} =14.4V, THD=10%	—	17	—	
	P _{OUT} (2)	—	THD=10%	10	14	—	
Total Harmonic Distortion Ratio	THD	—	P _{OUT} =3W	—	0.02	0.2	%
Voltage Gain	G _V	—	V _{OUT} =0.775V _{rms} (0dBm)	32	34	36	dB
Voltage Gain Ratio	ΔG _V	—	V _{OUT} =0.775V _{rms} (0dBm)	-1.0	0	1.0	
Output Noise Voltage	V _{NO} (1)	—	R _g =0Ω, DIN45405	—	0.12	—	mV _{rms}
	V _{NO} (2)	—	R _g =0Ω, BW=20Hz~20kHz	—	0.10	0.35	
Ripple Rejection Ratio	R.R.	—	f _{ripple} =100Hz, R _g =620Ω V _{rid} =0.775V _{rms} (0dBm)	40	55	—	dB
Cross Talk	C.T.	—	R _g =620Ω, V _{OUT} =0.775V _{rms} (0dBm)	—	75	—	
Output Offset Voltage	V _{OFFSET}	—	V _{IN} =0	-300	0	300	mV
Input Resistance	R _{IN}	—	—	—	30	—	kΩ
Stand-By Current	I _{SB}	—	Stand-by condition	—	100	150	μA
Stand-By Control Voltage	V _{SB} H	—	Power : ON	3.0	—	V _{CC}	V
	V _{SB} L	—	Power : OFF	0	—	1.5	
Mute Control Voltage (Note)	V _M H	—	Mute : OFF	OPEN			
	V _M L	—	Mute : ON	0	—	1.5	
Mute Attenuation	ATT M	—	Mute : ON	—	70	—	dB

Note) Muting function must be controlled by open and low logic.

This means that the mute control terminal : pin⑤ must not be pulled up.

KIA8255AH

BLOCK DIAGRAM

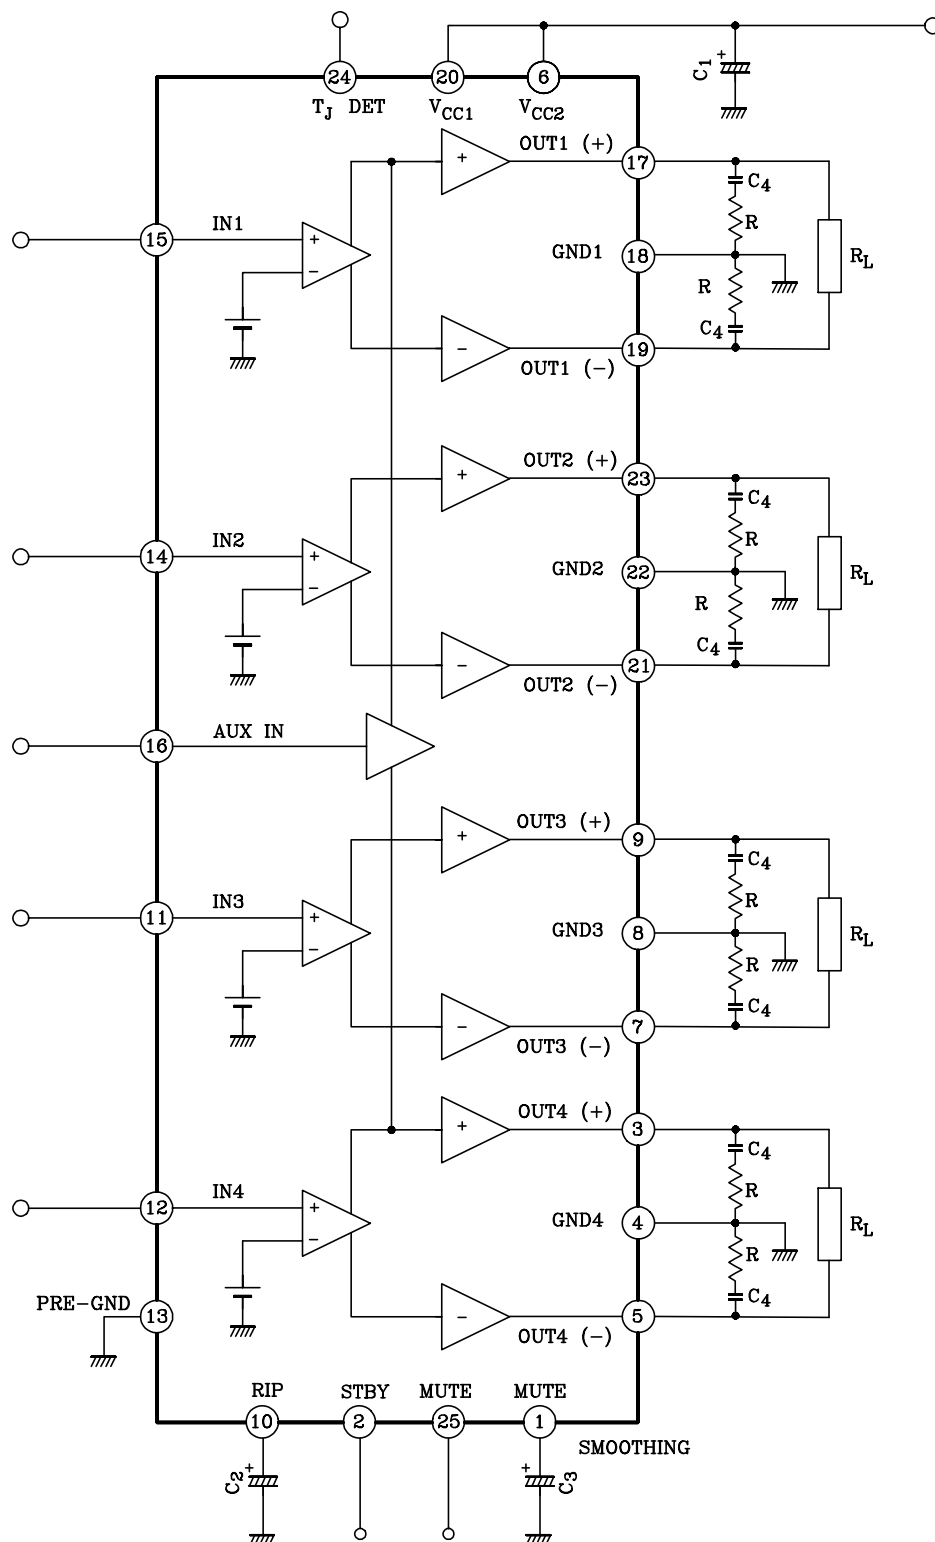


(Note) Please be careful that the pin ① and the pin ②⑤ are exchanged in comparison with before data sheet, and the non-inverse output and the inverse output are exchanged, too.

KIA8255AH

TEST CIRCUIT

($G_V=34\text{dB}$)

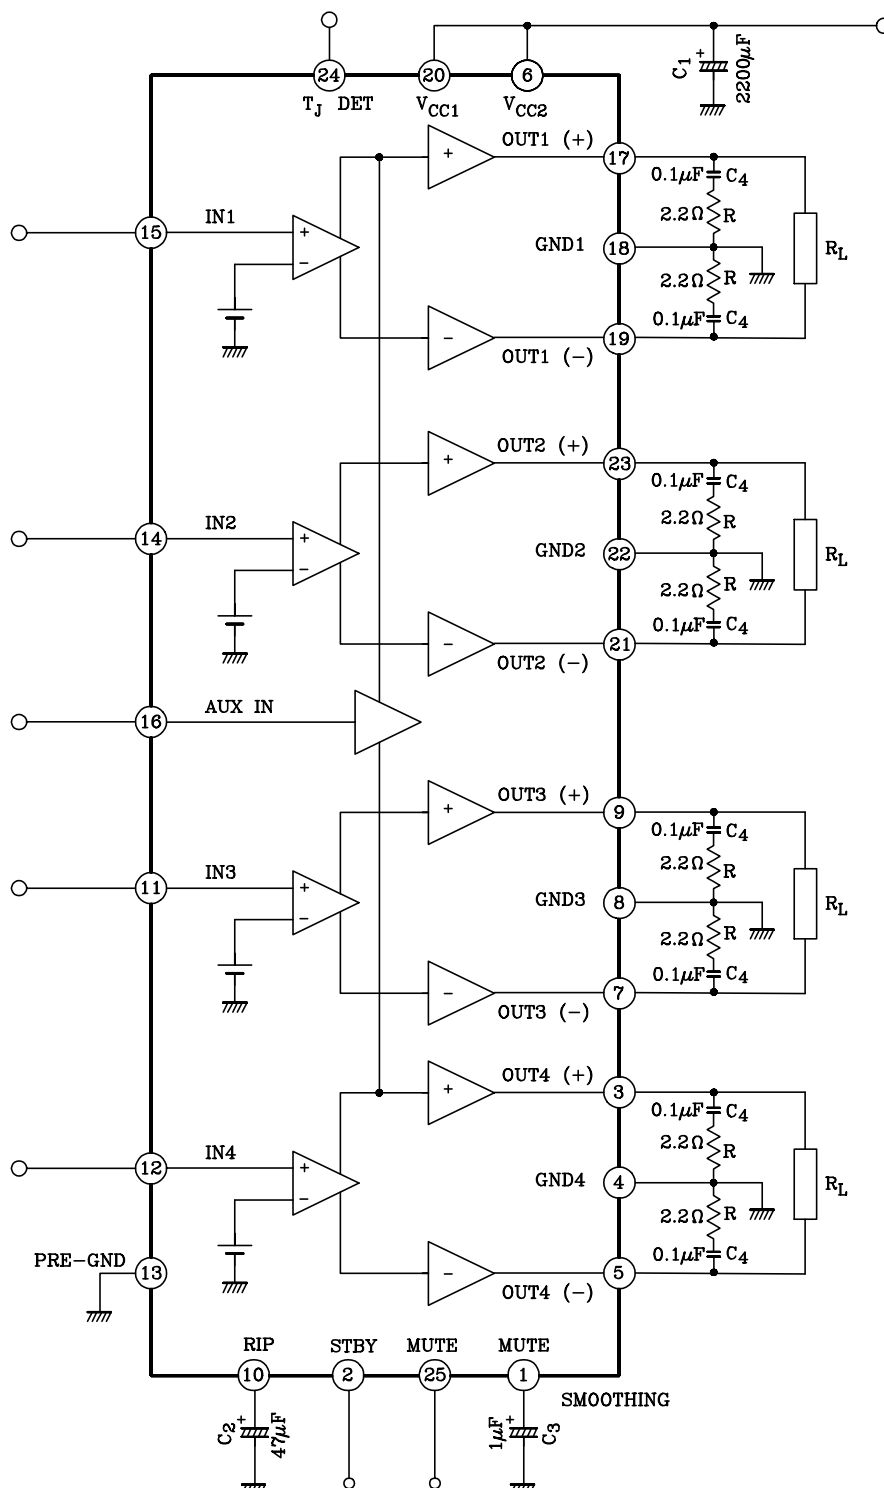

(Note) Please be careful that the pin ① and the pin ㉕ are exchanged in comparison with before data sheet, and the non-inverse output and the inverse output are exchanged, too.