



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-425-008 REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO : 4254SDRC/S845 ECN : Page: 1/4


■ Features :

- High luminous power.
- Can be driven at low current.
- 2.54mm lead spacing.
- Available on tape and reel.

■ Descriptions:

- The series is specially designed for applications require higher brightness than that achievable with standard lamp.
- The led lamps are available with different colors,intensities, epoxy colors, etc.

■ Package Dimensions:

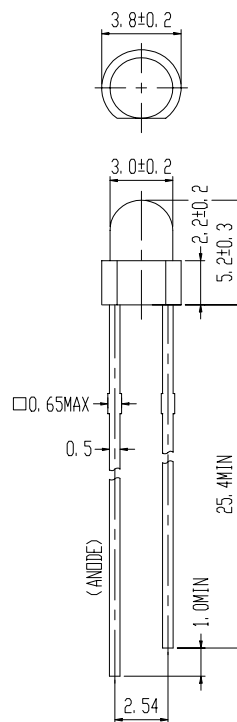

■ Applications :

- TV Set
- Monitor
- Telephone
- Computer

■ NOTES :

- 1.All dimensions are in millimeters.
- 2.Epoxy meniscus may extend about +0.0,-0.5mm down to the lead.

PART NO	CHIP		Lens Color
	Material	Emitted Color	
4254SDRC/S845	AlGaInP	Super Deep-Red	Water Clear

B89010158,T00045

Office : NO 25.Lane 76. Chung Yang Rd. Sec.3. Tucheng. Taipei 236. Taiwan. R.O.C.
TEL : 886-2-2267-2000,2266-9936(22 Lines)

FAX : 886-2-2267-6189

[http: //www.everlight.com](http://www.everlight.com)



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-425-008 REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO : 4254SDRC/S845 ECN : Page: 2/4

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	If	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	120	mA
Reverse Voltage	Vr	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	Iv	120	160	----	mcd	If=20mA
Viewing Angle	2 θ 1/2	-----	45	----	deg	If=20mA
Peak Wavelength	λ p	----	650	----	nm	If=20mA
Dominant Wavelength	λ d	----	639	----	nm	If=20mA
Spectrum Radiation Bandwidth	△ λ	----	20	----	nm	If=20mA
Forward Voltage	Vf	----	2.0	2.4	V	If=20mA
Reverse Current	Ir	----	----	10	μ A	Vr=5V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-425-008

REV: 1.0







3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO 4254SDRC/S845

ECN :

Page: 3/4

■ Typical Electro-Optical Characteristic Curves

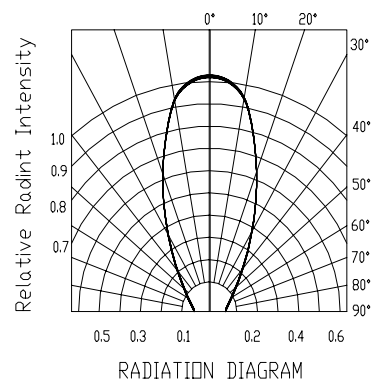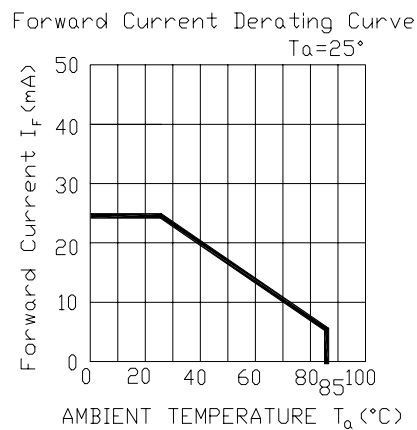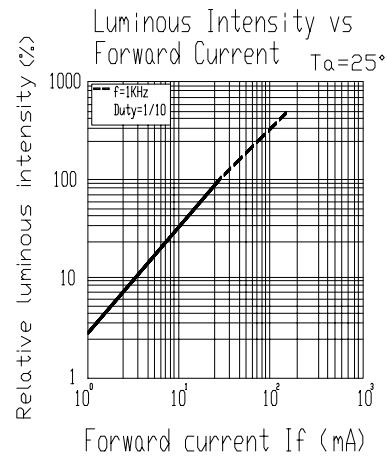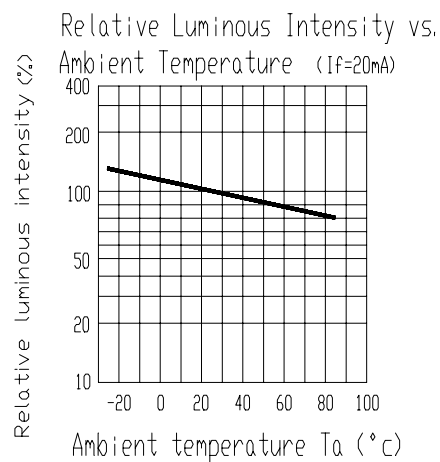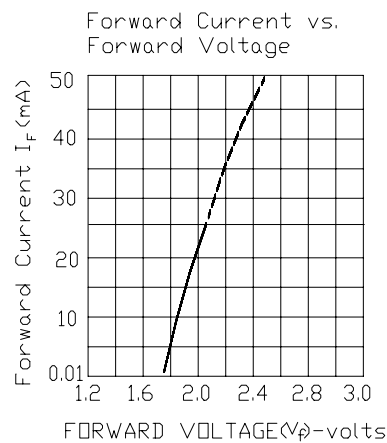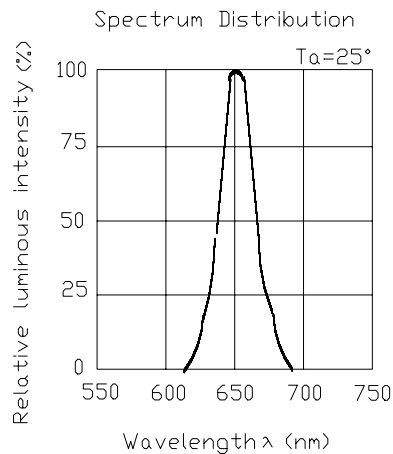



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-425-008

REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO 4254SDRC/S845

ECN :

Page: 4/4

■ Reliability test items and conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Soldering Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 Pcs	0/1