





# L4938E/ED L4938EPD

## ADVANCED VOLTAGE REGULATOR


- ENABLE AND SENSE INPUTS (EN, SI) PROTECTED AGAINST NEGATIVE TRANSIENTS DOWN TO -5V
- RESET THRESHOLD ADJUSTABLE FROM 3.8 TO 4.7V
- EXTREMELY LOW QUIESCENT CURRENT, 65µA (LESS THAN 90µA) IN STANDBY MODE
- OPERATING DC SUPPLY VOLTAGE RANGE 5V - 28V
- OPERATING TRANSIENT SUPPLY VOLTAGE UP TO 40V
- HIGH PRECISION STANDBY OUTPUT VOLTAGE  $5V \pm 1\%$  WITH 100mA CURRENT CAPABILITY
- OUTPUT 2 VOLTAGE  $5V \pm 2\%$  WITH 400mA CURRENT CAPABILITY (ADJ WIRED TO  $V_{OUT2}$ )
- OUTPUT 2 VOLTAGE ADJUSTABLE BY EXTERNAL VOLTAGE DIVIDER
- OUTPUT 2 DISABLE FUNCTION FOR STANDBY MODE



DIP (12+2+2)



SO20 (12+4+4)




PowerSO20

**ORDERING NUMBERS:** L4938E (DIP)  
L4938ED (SO)  
L4938EPD (PSO)

### DESCRIPTION

The L4938E/ED/EPD is a monolithic integrated dual voltage regulator with two very low dropout outputs and additional functions as power-on reset and input voltage sense. It is designed for supplying the microcomputer controlled systems especially in automotive applications.

### PIN CONNECTIONS

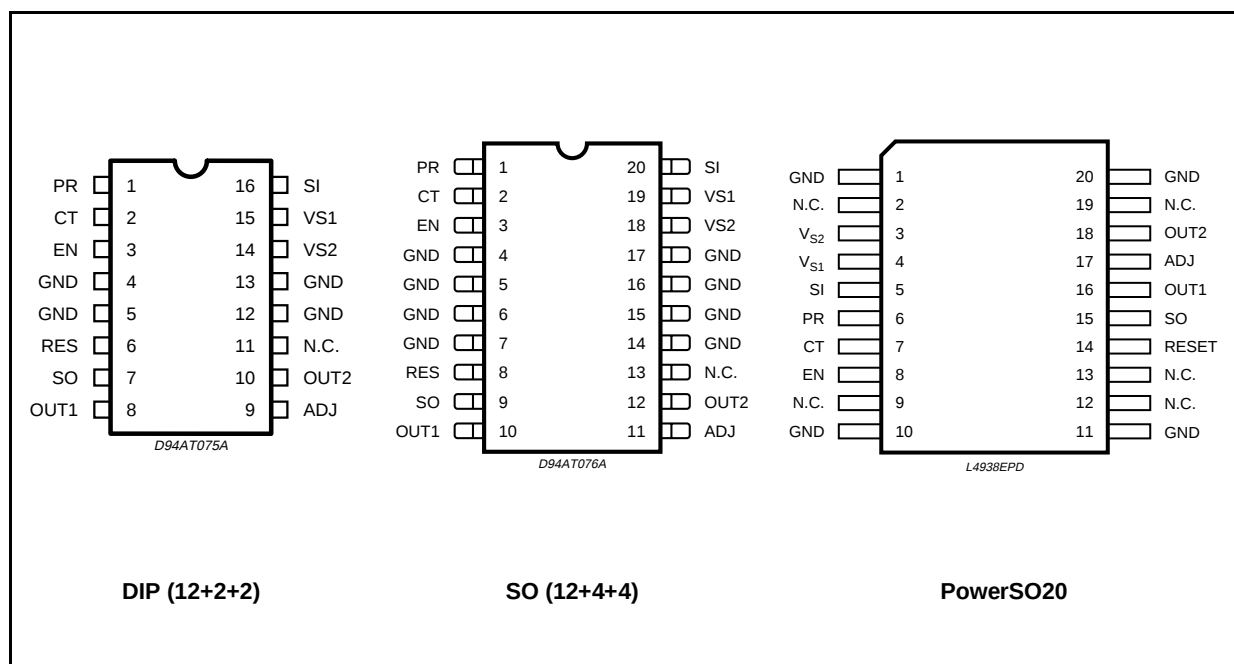


ABSOLUTE MAXIMUM RATINGS

| Symbol                             | Parameter                                                                                                         | Value              | Unit |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------------------|------|
| V <sub>INDC</sub>                  | DC Operating Supply Voltage                                                                                       | 28                 | V    |
| V <sub>INTR</sub>                  | Transient Operating Supply Voltage (T < 400ms)                                                                    | -14 to 40          | V    |
| I <sub>O</sub>                     | Output Current                                                                                                    | internally limited |      |
| V <sub>SI</sub>                    | Sense Input Voltage (Voltage Forced) (note 2)                                                                     | -20 to 20          | V    |
| I <sub>SI</sub>                    | Sense Input Current (Current Forced) (note 2)                                                                     | ±1                 | mA   |
| V <sub>EN</sub>                    | Enable Input Voltage (Voltage Forced) (note 2)                                                                    | -20 to 20          | V    |
| I <sub>EN</sub>                    | Sense Input Current (Current Forced) (note 2)                                                                     | ±1                 | mA   |
| V <sub>RES</sub> , V <sub>SO</sub> | Output Voltages                                                                                                   | -0.3 to 20         | V    |
| I <sub>RES</sub> , I <sub>SO</sub> | Output Currents (Output Low)                                                                                      | 5                  | mA   |
| P <sub>O</sub>                     | Power Dissipation at T <sub>amb</sub> = 80°C (note 3)<br>Powerdip 12+2+2                                          | 875                | mW   |
| T <sub>stg</sub>                   | Storage Temperature                                                                                               | -65 to 150         | °C   |
| T <sub>j</sub>                     | Operating Junction Temperature                                                                                    | -40 to 150         | °C   |
| T <sub>JSD</sub>                   | Thermal shutdown junction temperature Output 2 will shut-down typically at T <sub>j</sub> 10K lower than output 1 | 165                | °C   |

Note 1: The circuit is ESD protected according to MIL-STD-883C  
Note 2: Current forced means voltage unlimited but current limited to the specified value  
Voltage forced means voltage limited to the specified values while the current is not limited  
Note 3: Typical value soldered on a PC board with 8cm<sup>2</sup> copper ground plane (35mm thick).

BLOCK DIAGRAM

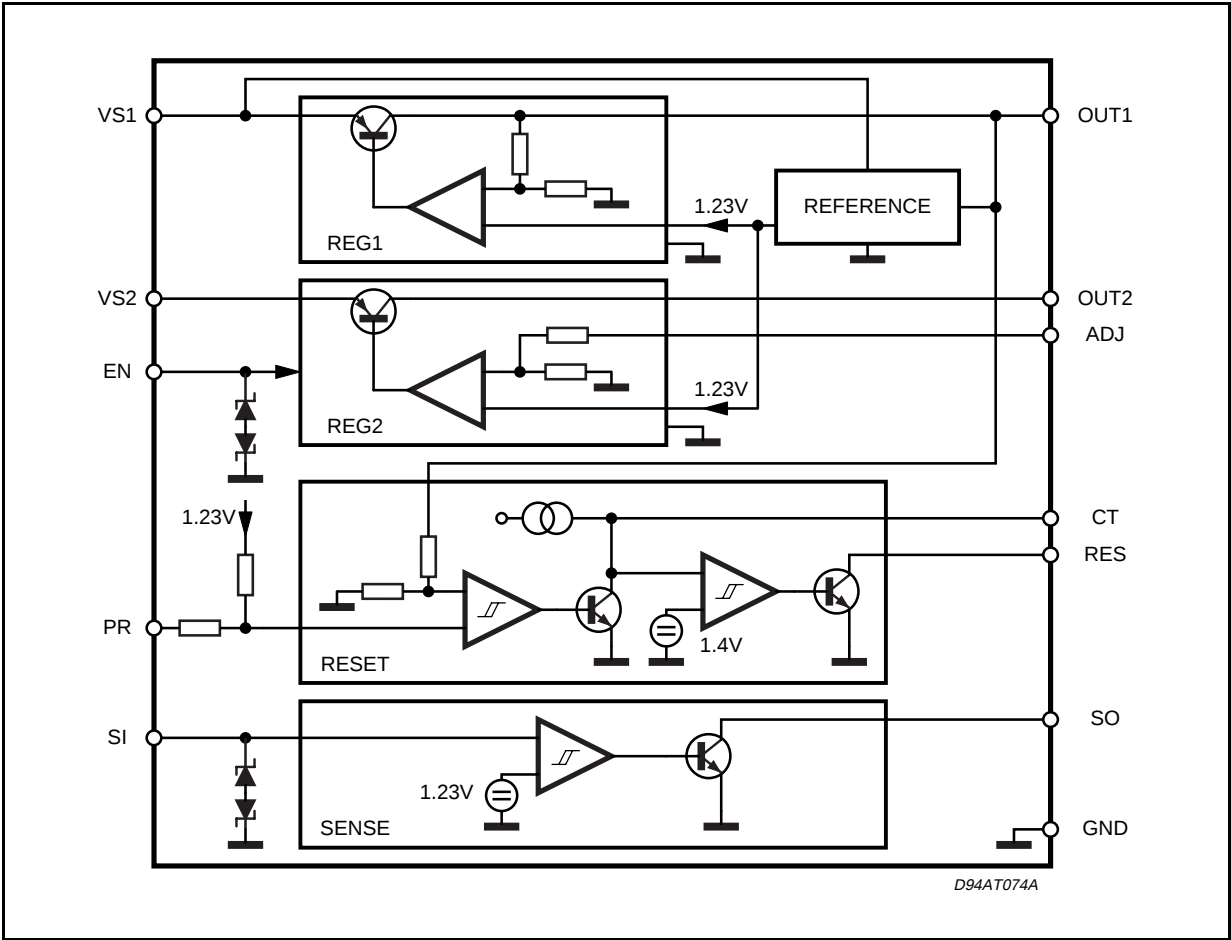

## THERMAL DATA

| Symbol           | Parameter                              | DIP 12+2+2 | SO 12+4+4 | PowerSO20 | Unit |
|------------------|----------------------------------------|------------|-----------|-----------|------|
| $R_{th\ j-amb}$  | Thermal Resistance Junction to ambient | 40         | 50        | -         | °C/W |
| $R_{th\ j-case}$ | Thermal Resistance Junction to case    | -          | -         | <2        | °C/W |

Note 3: Typical value soldered on a PC board with 8cm<sup>2</sup> copper ground plane (35mm thick).

## PIN FUNCTIONS

| PIN<br>(DIP 12+2+2) | PIN<br>(SO 12+4+4)            | PIN<br>PowerSO20 | Name  | Function                                       |
|---------------------|-------------------------------|------------------|-------|------------------------------------------------|
| 14                  | 18                            | 3                | VS2   | Supply Voltage (400mA Regulator)               |
| 15                  | 19                            | 4                | VS1   | Supply Voltage (100mA Regulator, Reset, Sense) |
| 16                  | 20                            | 5                | S1    | Sense Input                                    |
| 1                   | 1                             | 6                | PR    | Reset Theresold Programming                    |
| 2                   | 2                             | 7                | CT    | Reset Delay Capacitor                          |
| 3                   | 3                             | 8                | EN    | Enable (low will activate the 400mA regulator) |
| 4, 5, 12, 13        | 4, 5, 6, 7, 14,<br>15, 16, 17 | 1,10,11,20       | GND   | Ground                                         |
| 6                   | 8                             | 14               | RES   | Reset Output                                   |
| 7                   | 9                             | 15               | SO    | Sense Output                                   |
| 8                   | 10                            | 16               | OUT 1 | 100mA Regulator Output                         |
| 9                   | 11                            | 17               | ADJ   | Feedback of 400mA Regulator                    |
| 10                  | 12                            | 18               | OUT 2 | 400mA Regulator Output                         |
| 11                  | 13                            | 2,9,19           | NC    | Not Connected                                  |

ELECTRICAL CHARACTERISTICS ( $V_S = 14V$ ;  $T_J = -40$  to  $150^\circ C$  unless otherwise specified.)

| Symbol             | Parameter                                  | Test Condition                                                                          | Min. | Typ. | Max. | Unit    |
|--------------------|--------------------------------------------|-----------------------------------------------------------------------------------------|------|------|------|---------|
| <b>OUT 1</b>       |                                            |                                                                                         |      |      |      |         |
| $V_{O1}$           | Supply Output Voltage                      | $V_S = 6$ to $28V$ ;<br>$I_{O1} = 400\mu A$ to $100mA$                                  | 4.9  | 5    | 5.1  | V       |
|                    |                                            | $T_J \leq 125^\circ C$ ; $I_{O1} = 50$ to $400\mu A$                                    | 4.8  | 5    | 5.2  | V       |
| $V_{DP1}$          | Dropoutput Voltage 1                       | $I_{OUT1} = 10mA$                                                                       |      | 0.1  | 0.2  | V       |
|                    |                                            | $I_{OUT1} = 100mA$ ; $V_S = 4.8V$                                                       |      | 0.2  | 0.4  | V       |
| $V_{OL01}$         | Load Regulation 1                          | $I_{OUT1} = 1$ to $100mA$<br>(after regulation setting)                                 |      |      | 25   | mV      |
| $V_{LIM1}$         | Current Limit 1                            | $V_{OUT1} = 0.8$ to $4.5V$                                                              | 100  | 200  | 400  | mA      |
| $I_{QSB}$          | Quiescent Current in Standby Mode          | $I_{EN} \geq 2.4V$ (output 2 disabled)<br>$I_{O1} = 0.1mA$ ; $V_{SI} > 1.3V$            |      | 65   | 90   | $\mu A$ |
|                    |                                            | $T_J < 85^\circ C$ ; $R_{PR} = 0$                                                       |      | 75   |      | $\mu A$ |
| <b>OUT 2</b>       |                                            |                                                                                         |      |      |      |         |
| $V_{O2}$           | Output Voltage 2<br>ADJ connected to OUT 2 | Enable = LOW; $V_S = 6$ to $28V$ ;<br>$I_{O2} = 5$ to $400mA$                           | 4.9  |      | 5.1  | V       |
| $V_{DP2}$          | Dropoutput Voltage 2                       | $I_{OUT2} = 100mA$                                                                      |      | 0.2  | 0.3  | V       |
|                    |                                            | $I_{OUT2} = 400mA$ ; $V_S = 4.8V$                                                       |      | 0.3  | 0.6  | V       |
| $V_{OL02}$         | Load Regulation 2                          | $I_{OUT1} = 5$ to $400mA$<br>(after regulation setting)                                 |      |      | 50   | mV      |
| $R_{ADJ}$          | Adjust Input Resistance                    |                                                                                         | 60   | 100  | 150  | mA      |
| $I_{LIM2}$         | Current Limit 2                            | $V_{O2} = 0.8$ to $4.5V$                                                                | 450  | 650  | 1300 | mA      |
| $I_O$              | Quiescent Current                          | $I_{OUT1} = 100mA$ ; $I_{OUT2} = 400mA$                                                 |      |      | 20   | mA      |
| <b>OUT1, OUT 2</b> |                                            |                                                                                         |      |      |      |         |
| $V_{OLi\ 1,2}$     | Line Regulation                            | $V_S = 6$ to $28V$ ; $I_{O1} = 1mA$ ,<br>$I_{O2} = 5mA$ ,<br>(after regulation setting) |      |      | 20   | mV      |

## ELECTRICAL CHARACTERISTICS (Continued)

| Symbol               | Parameter                                        | Test Condition                                                                         | Min. | Typ.                 | Max.                 | Unit |
|----------------------|--------------------------------------------------|----------------------------------------------------------------------------------------|------|----------------------|----------------------|------|
| ENABLE INPUT         |                                                  |                                                                                        |      |                      |                      |      |
| V <sub>ENL</sub>     | Enable Input Low Voltage<br>(Output 2 Active)    |                                                                                        | -20  |                      | 1                    | V    |
| V <sub>ENH</sub>     | Enable Input High Voltage                        |                                                                                        | 1.4  |                      | 20                   | V    |
| V <sub>ENhyst</sub>  | Enable Hysteresis                                |                                                                                        | 20   | 30                   | 60                   | mV   |
| I <sub>EN LOW</sub>  | Enable Input Current Low                         | V <sub>EN</sub> = 0                                                                    | -20  | -8                   | -3                   | μA   |
| I <sub>EN HIGH</sub> | Enable Input Current High                        | V <sub>EN</sub> = 1.1 to 7V; T <sub>J</sub> < 130°C;                                   | -1   | 0                    | 1                    | μA   |
|                      |                                                  | V <sub>EN</sub> = 1.1 to 7V;<br>T <sub>J</sub> = 130 to 150°C;                         | -10  | 0                    | 10                   | μA   |
| RESET CIRCUIT        |                                                  |                                                                                        |      |                      |                      |      |
| V <sub>RT</sub>      | Reset Thersold Voltage<br>(note4)                | R <sub>PR</sub> = ∞                                                                    | 4.5  | V <sub>O1</sub> -0.3 | V <sub>O1</sub> -0.2 | V    |
|                      |                                                  | R <sub>PR</sub> = 0                                                                    | 3.65 | 3.8                  | 3.95                 | V    |
| V <sub>RTH</sub>     | Reset Thersold Hysteresis                        | R <sub>PR</sub> = ∞                                                                    | 30   | 60                   | 120                  | mV   |
| t <sub>RD min</sub>  | Reset Pulse Delay                                | C <sub>RES</sub> = 47nF; t <sub>r</sub> ≤ 30μs; (note 5)                               | 40   | 60                   | 100                  | ms   |
| t <sub>RD nom</sub>  | Reset Pulse Delay                                | C <sub>RES</sub> = 47nF; (note 6)                                                      | 60   | 100                  | 140                  | ms   |
| t <sub>RR</sub>      | Reset Reaction Time                              | C <sub>RES</sub> = 47nF                                                                | 10   | 50                   | 150                  | μs   |
| I <sub>CT</sub>      | Pull Down Capability of the<br>Discharge circuit | V <sub>OUT1</sub> < V <sub>RT</sub>                                                    | 3    | 6                    | 15                   | mA   |
| I <sub>CT</sub>      | Charge Current                                   | V <sub>OUT1</sub> > V <sub>RT</sub>                                                    | -1.3 | -1                   | 0.7                  | μA   |
| V <sub>RESL</sub>    | Reset Output Low Voltage                         | R <sub>RES</sub> = 10KΩ to V <sub>OUT1</sub><br>V <sub>OUT1</sub> ≥ 1.5V               |      |                      | 0.4                  | V    |
| V <sub>RESH</sub>    | Reset Output High Leakage<br>current             | V <sub>RES</sub> = 5V                                                                  |      |                      | 1                    | μA   |
| SENSE COMPARATOR     |                                                  |                                                                                        |      |                      |                      |      |
| V <sub>SI</sub>      | Functional Range                                 |                                                                                        | -20  |                      | 20                   | V    |
| V <sub>SIT</sub>     | Sense Threshold Voltage                          | Falling Edge; T <sub>J</sub> <130°C                                                    | 1.08 | 1.16                 | 1.24                 | V    |
|                      |                                                  | Falling Edge; T <sub>J</sub> <130 to 150°C                                             | 1.05 | 1.16                 | 1.29                 | V    |
| V <sub>SITH</sub>    | Sense Threshold Hysteresis                       |                                                                                        | 10   | 30                   | 60                   | mV   |
| V <sub>SOL</sub>     | Sense Output Low Voltage                         | V <sub>SI</sub> ≤ 1.05V; R <sub>SO</sub> =10KΩ<br>connected to 5V; V <sub>S</sub> ≥ 5V |      |                      | 0.4                  | V    |
| I <sub>SOH</sub>     | Sense Output Leakage                             | V <sub>SO</sub> = 5V; V <sub>SI</sub> ≥ 1.5V                                           |      |                      | 1                    | μA   |
| I <sub>SI HIGH</sub> | Sense Input Current High                         | V <sub>SI</sub> = 1.1 to 7V; T <sub>J</sub> <130°C                                     | -1   | 0                    | 1                    | μA   |
|                      |                                                  | V <sub>SI</sub> = 1.1 to 7V; T <sub>J</sub> <130 to 150°C                              | -10  | 0                    | 10                   | μA   |
| I <sub>SI LOW</sub>  | Sense Input Current Low                          | V <sub>SI</sub> = 0V                                                                   | -20  | -8                   | -3                   | μA   |

Note :

- 4) The reset threshold can be programmed continuously from typ 3.8V to 4.7V by changing a value of an external resistor from pin PR to GN
- 5) This is a minimum reset time according to the hysteresis of the comparator. Delay time starts with  $V_{OUT1}$  exceeding  $V_{RT}$
- 6) This is the nominal reset time depending on the discharging limit of  $C_T$  (saturation voltage) and the upper threshold of the timer comparator. Delay time starts with  $V_{OUT1}$  exceeding  $V_{RT}$
- 7) The leakage of  $C_T$  must be less than 0.5mA (2V). If an external resistor between  $C_T$  and  $V_{OUT1}$  is applied, the leakage current may be increased. The external resistor should have more than 30K $\Omega$ .  
for stability:  $C_S \geq 1\mu F$ ,  $C_{O1} \geq 10\mu F$ ,  $C_{O2} \geq 10\mu F$ ,  $ESR \leq 5\Omega$  (designed target) For details see application note.
- 8) For transients exceeding 20V or -20V external protection is required at the Pins SI and EN as shown at Pin EN. The protection proposed will provide proper function for transients in the range of  $\pm 200V$ . If the zener diode is omitted the external resistor should be raised to 200K $\Omega$  to limit the current to 1mA. Without the zener diode, the function 20V or -20V can not be guaranteed.



Connecting a resistor divider  $R_{1E}$ ,  $R_{2E}$  to the ADJ, OUT2 pin the output voltage 2 can be programmed to the value of

$$V_{OUT2} = V_{OUT1} \left( 1 + \frac{R_{1E}(R_{2E} + R_{ADJ})}{R_{2E} \cdot R_{ADJ}} \right)$$

with  $R_{ADJ} = 60K$  to  $150K$  and  $V_{OUT1} = 4.95$  to  $5.05V$ .

For an exact calculation the temperature coefficient ( $T_c$  -2000ppm) of the internal resistor ( $R_{ADJ}$ ) must be taken into account. Pin ADJ in this mode should not have a capacitive burden because this would reduce the phase margin of the regulator loop.

### Reset circuit

The reset circuit supervises the standby output voltage. The reset output (RES) is defined from  $V_{OUT} \geq 1V$ .

Even if  $V_S$  is lacking, the reset generator is supplied by the output voltage  $V_{OUT1}$ .

The reset threshold of  $4.7V$  is defined with the internal reference voltage (note 9) and standby output divider, when pin PR is left open. The reset threshold voltage can be programmed in the range from  $3.8V$  to  $4.7V$  by connecting an external resistor from pin PR to GND.

The value of the programming resistor  $R_{PR}$  can be calculated with:

$$R_{PR} = \frac{22K}{\frac{4.7K}{V_{RT}} - 1} - 92.9K, 3.8V \leq V_{RT} \leq 4.7V$$

The reset pulse delay time  $t_{RD}$ , is defined with the charge time of an external capacitor  $C_T$ :

$$t_{RDmin} = \frac{C_T \cdot 0.6V}{1\mu A} \text{ (note 5)}$$

$$t_{RDnom} = \frac{C_T \cdot 1.4V}{1\mu A} \text{ (note 6)}$$

The reaction time of the reset circuit originates from the noise immunity. Standby output voltage drops below the reset threshold only a bit longer than the reaction time results in a shorter reset delay time. The nominal reset delay time will be generated for standby output voltage drops longer

than approximately  $50\mu s$ .

The minimum reset time is generated if reset condition only occurs for a short time triggering a reset pulse but not completely discharging  $C_T$ . The reset can be related to output2 on request. If higher charge currents for the reset capacitor are required a resistors from Pin  $C_T$  to OUT1, may be used to increase the current. We recommended the use of  $10K\Omega$  to  $5V$  as an output pull up.

### Sense Comparator

The sense comparator compares an input signal with an internal voltage reference of typical  $1.23V$ . The use of an external voltage divider makes this comparator very flexible in the application. It can be used to supervise the input voltage either before or after the protection diode and to give additional information to the microprocessor like low voltage warnings. We recommended the use of  $10K\Omega$  to  $5V$  as an output pull up.

Note 9:

The reference is alternatively supplied from  $V_S$  or  $V_{OUT1}$ . If one supply is present, the reference is operating.

### Thermal Protection

Both outputs are provided with an overtemperature shut down regulation power dissipation down to uncritical values.

Output 2 will shut down approximately  $10K$  before output 1.

Under normal conditions shut down of output 2 will allow the chip to cool down again. Thus output 1 will be unaffected.

The thermal shut down reduces the output voltages until power dissipation and the flow of thermal energy out of the chip balance.

### Transient Sensitivity

In proper operation ( $V_{OUT} > 4.5V$ ) the reference is supplied by  $V_{OUT1}$  thus reducing sensitivity to input transients.

Precise Data will be issued as soon as samples are available.




## INPUT PROTECTION


The Inputs Enable (EN) and sense in(SI) are pro-

tected against negative transients. Figure 5 is showing the simplified schematic

Figure 5.

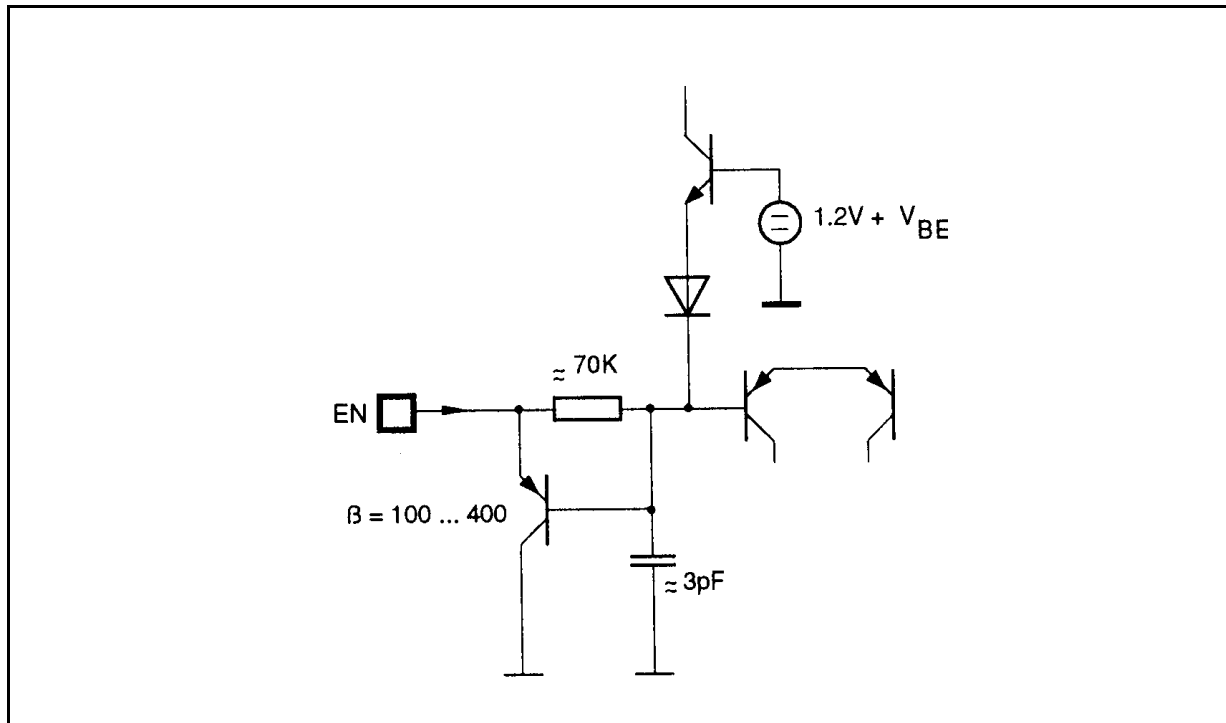


## Input Characteristics of SI, EN:

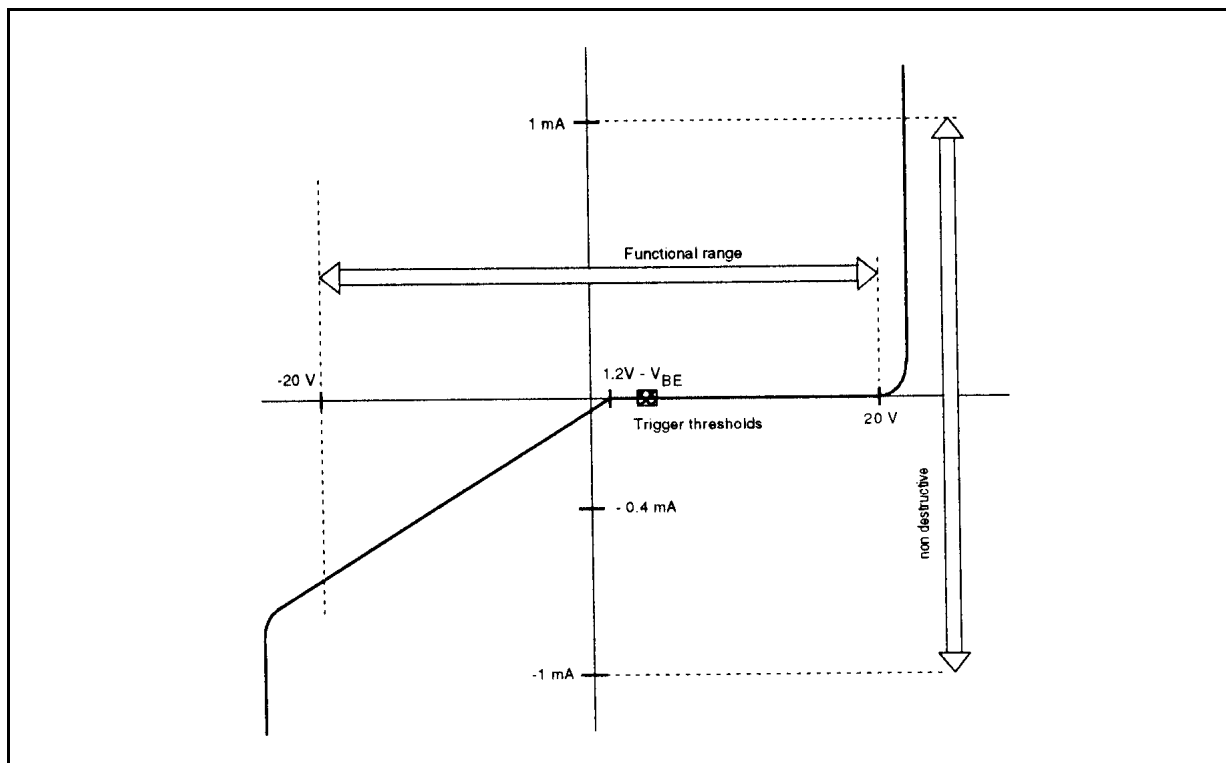


| DIM. | mm   |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.85 |       | 1.40 | 0.033 |       | 0.055 |
| b    |      | 0.50  |      |       | 0.020 |       |
| b1   | 0.38 |       | 0.50 | 0.015 |       | 0.020 |
| D    |      |       | 20.0 |       |       | 0.787 |
| E    |      | 8.80  |      |       | 0.346 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.10 |       |       | 0.280 |
| I    |      |       | 5.10 |       |       | 0.201 |
| L    |      | 3.30  |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |

OUTLINE AND  
MECHANICAL DATA




Powerdip 16

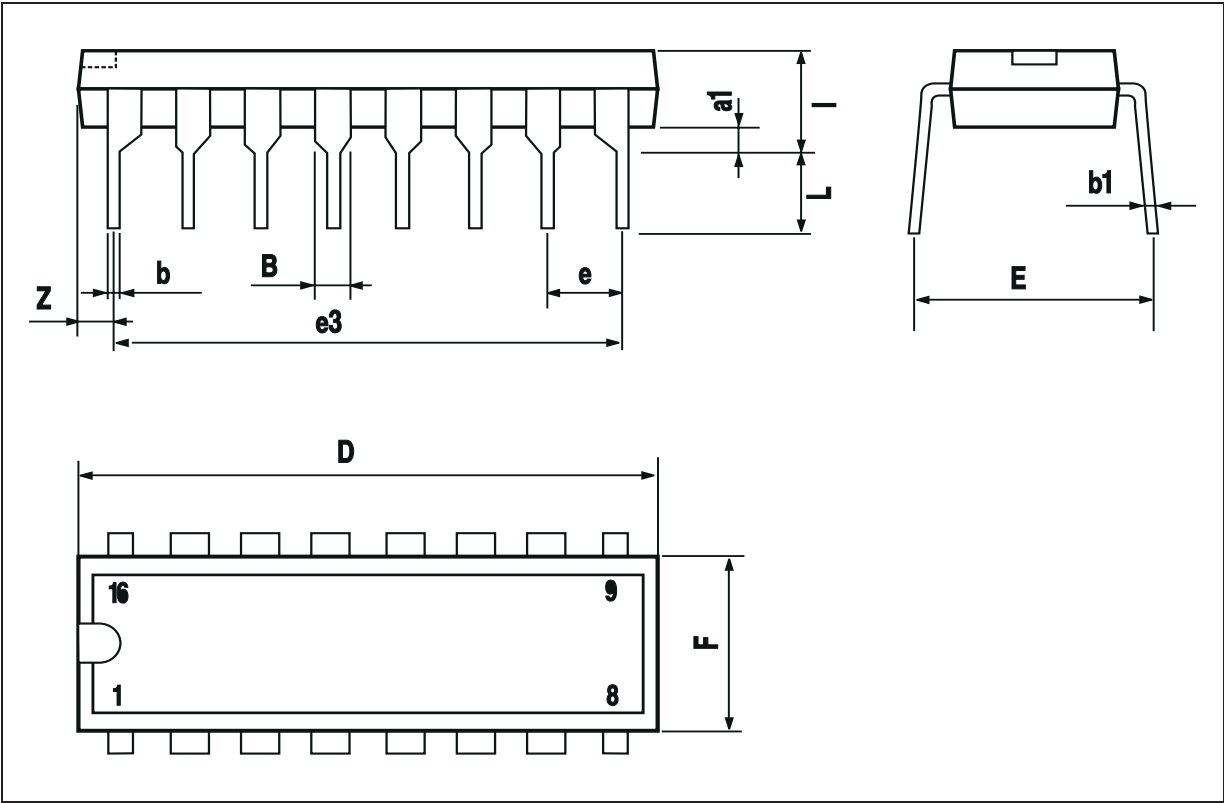


**L4938E - L4938ED - L4938EPD**

| DIM. | mm                 |      |       | inch  |       |       |
|------|--------------------|------|-------|-------|-------|-------|
|      | MIN.               | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 2.35               |      | 2.65  | 0.093 |       | 0.104 |
| A1   | 0.1                |      | 0.3   | 0.004 |       | 0.012 |
| B    | 0.33               |      | 0.51  | 0.013 |       | 0.020 |
| C    | 0.23               |      | 0.32  | 0.009 |       | 0.013 |
| D    | 12.6               |      | 13    | 0.496 |       | 0.512 |
| E    | 7.4                |      | 7.6   | 0.291 |       | 0.299 |
| e    |                    | 1.27 |       |       | 0.050 |       |
| H    | 10                 |      | 10.65 | 0.394 |       | 0.419 |
| h    | 0.25               |      | 0.75  | 0.010 |       | 0.030 |
| L    | 0.4                |      | 1.27  | 0.016 |       | 0.050 |
| K    | 0° (min.)8° (max.) |      |       |       |       |       |

**OUTLINE AND  
MECHANICAL DATA**

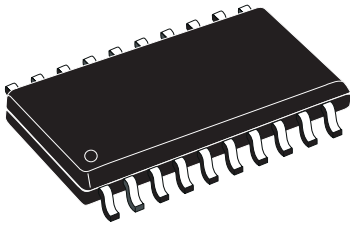


**SO20**

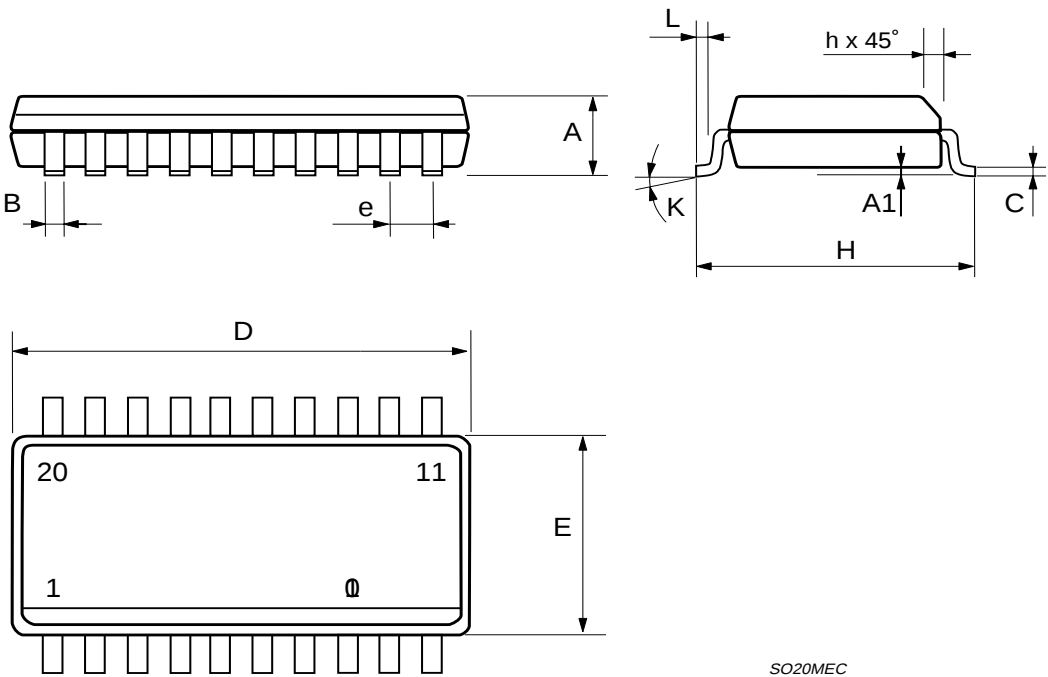

| DIM.   | mm         |       |      | inch  |       |       |
|--------|------------|-------|------|-------|-------|-------|
|        | MIN.       | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| A      |            |       | 3.6  |       |       | 0.142 |
| a1     | 0.1        |       | 0.3  | 0.004 |       | 0.012 |
| a2     |            |       | 3.3  |       |       | 0.130 |
| a3     | 0          |       | 0.1  | 0.000 |       | 0.004 |
| b      | 0.4        |       | 0.53 | 0.016 |       | 0.021 |
| c      | 0.23       |       | 0.32 | 0.009 |       | 0.013 |
| D (1)  | 15.8       |       | 16   | 0.622 |       | 0.630 |
| D1     | 9.4        |       | 9.8  | 0.370 |       | 0.386 |
| E      | 13.9       |       | 14.5 | 0.547 |       | 0.570 |
| e      |            | 1.27  |      |       | 0.050 |       |
| e3     |            | 11.43 |      |       | 0.450 |       |
| E1 (1) | 10.9       |       | 11.1 | 0.429 |       | 0.437 |
| E2     |            |       | 2.9  |       |       | 0.114 |
| E3     | 5.8        |       | 6.2  | 0.228 |       | 0.244 |
| G      | 0          |       | 0.1  | 0.000 |       | 0.004 |
| H      | 15.5       |       | 15.9 | 0.610 |       | 0.626 |
| h      |            |       | 1.1  |       |       | 0.043 |
| L      | 0.8        |       | 1.1  | 0.031 |       | 0.043 |
| N      | 10° (max.) |       |      |       |       |       |
| S      | 8° (max.)  |       |      |       |       |       |
| T      |            | 10    |      |       | 0.394 |       |


(1) "D and F" do not include mold flash or protrusions.  
- Mold flash or protrusions shall not exceed 0.15 mm (0.006").  
- Critical dimensions: "E", "G" and "a3"

## OUTLINE AND MECHANICAL DATA



JEDEC MO-166

PowerSO20

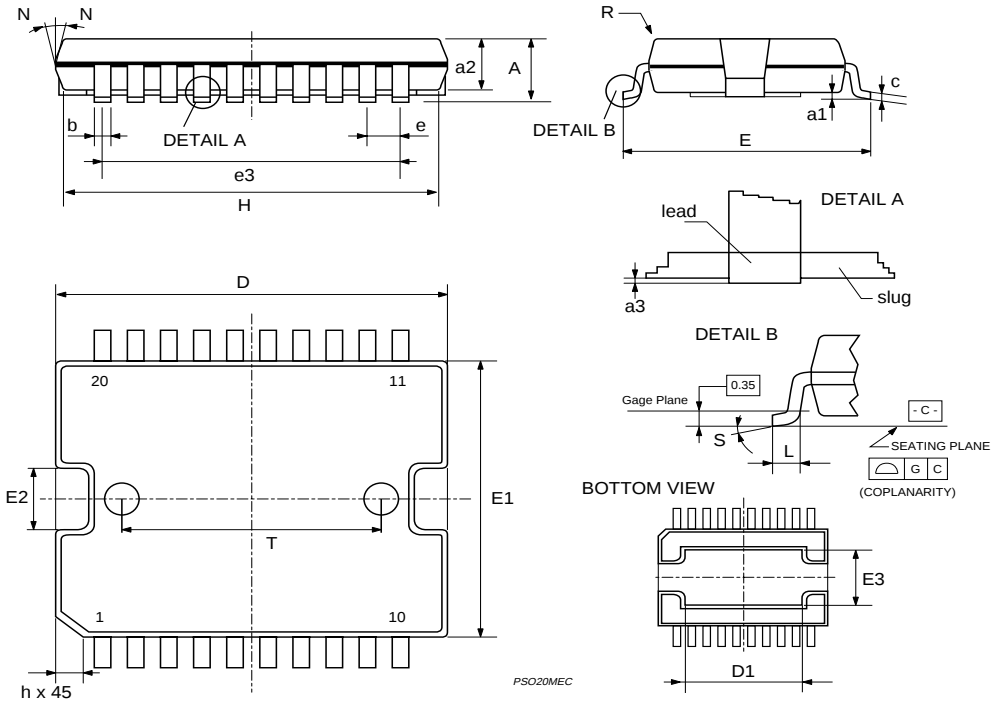

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.  
<http://www.st.com>