

AUDIO PROCESSOR


■ GENERAL DESCRIPTION

The **NJW1134** is a sound processor includes both the BBE sound enhancement and SRS 3D-Stereo. It includes all of the functions processing audio signal for TV, such as tone control, balance, volume, mute, and AGC functions.

Also the **NJW1134** performs sound enhancement and surround. The sound enhancement regenerates high definitive and nearly real sound, and SRS 3D-Stereo regenerates 3D surround sound with two speakers.

All of the internal status and variables are controlled by I²C BUS interface.

■ PACKAGE OUTLINE




NJW1134G

■ FEATURES

- Operating Voltage (8 to 13V)
- I²C BUS Interface
- BBE Sound Enhancement (Low Boost and High Boost: 15dB max.)
- Internal 6 Input Audio Selectors and Monitor Output
- The AGC circuit reduces volume difference among input sources.
- Variable AGC Compression Level via I²C (4-levels)
- Includes Dual Surround (SRS 3D-Stereo and NJRC Original Simulated Stereo)
- Variable Surround Effect Level via I²C (SRS mode, 2-Levels)
- Low Noise VCA
- Bi-CMOS Technology
- Package Outline (SOP40)

■ BLOCK DIAGRAM

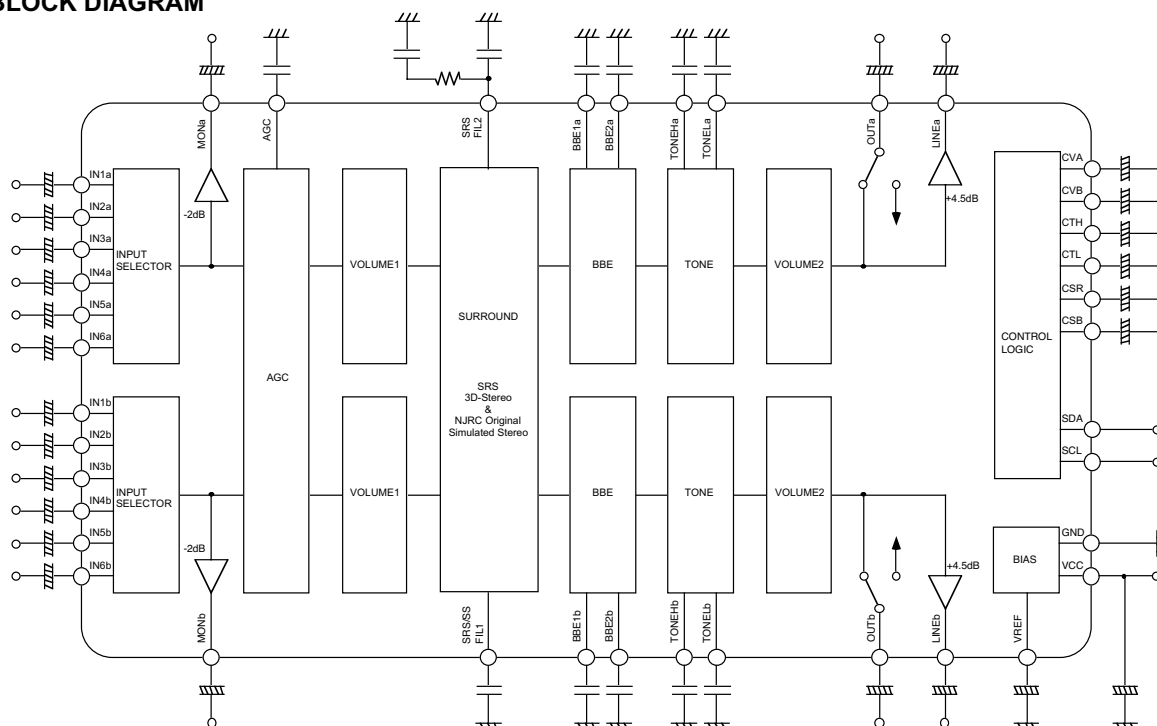

■ PIN CONFIGURATION

Ach Input Selector 1	1	IN1a	IN1b	40	Bch Input Selector 1
Ach Input Selector 2	2	IN2a	IN2b	39	Bch Input Selector 2
Ach Input Selector 3	3	IN3a	IN3b	38	Bch Input Selector 3
Ach Input Selector 4	4	IN4a	IN4b	37	Bch Input Selector 4
Ach Input Selector 5	5	IN5a	IN5b	36	Bch Input Selector 5
Ach Input Selector 6	6	IN6a	IN6b	35	Bch Input Selector 6
Ach Monitor Output(-2dB)	7	MONa	MONb	34	Bch Monitor Output(-2dB)
Surround Filter 1	8	SRS/SS FIL1	SRS FIL2	33	Surround Filter 2
Ach BBE Filter 1	9	BBE1a	BBE1b	32	Bch BBE Filter 1
Ach BBE Filter 2	10	BBE2a	BBE2b	31	Bch BBE Filter 2
Ach Tone High Frequency	11	TONE-Ha	TONE-Hb	30	Bch Tone High Frequency
Ach Tone Low Frequency	12	TONE-La	TONE-Lb	29	Bch Tone Low Frequency
Ach Line Output (4.5dB)	13	LINEa	LINEb	28	Bch Line Output (4.5dB)
Ach Main Output (0dB)	14	OUTa	OUTb	27	Bch Main Output (0dB)
AGC	15	AGC	CSR	26	DAC Output for Surround ON/OFF
DAC Output for Ach Volume & Balance	16	CVa	CTH	25	DAC Output for Tone High Frequency
DAC Output for Bch Volume & Balance	17	CVb	CTL	24	DAC Output for Tone Low Frequency
I ² C Bus SDA	18	SDA	CSB	23	DAC Output for BBE ON/OFF
I ² C Bus SCL	19	SCL	Vref	22	Reference Voltage
GND	20	GND	V+	21	Power Supply

■ ABSOLUTE MAXIMUM RATING (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺	14	V
Power Dissipation	P _D	700	mW
Operating Temperature Range	Topr	-20 to +75	°C
Storage Temperature Range	Tstg	-40 to +125	°C

■ ELECTRICAL CHARACTERISTICS (Ta=25°C, V⁺=9V, Rg=600Ω, R_L=47kΩ, Vin=100mVrms/1kHz)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺		8.0	9.0	13.0	V
Supply Current	I _{CC}	No Signal	-	30	50	mA
Reference Voltage	V _{REF}	No Signal	4.0	4.5	5.0	V
Maximum Input Voltage	V _{IM}	VOL=-20dB, THD=1%	2.8	3.0	-	Vrms
Maximum Output Voltage1	V _{OM1}	OUTPUT VOL=0dB, THD=1%	-	2.5	-	Vrms
Maximum Output Voltage2	V _{OM2}	LINEOUT VOL=0dB, THD=1%	-	2.5	-	Vrms
MON OUT Gain	G _{VMON}	MON OUT	-	-2.0	-	dB
LINEOUT Gain	G _{VLINE}	LINEOUT, VOL=0dB	2.5	4.5	6.5	dB
Maximum Gain	G _{VMAX}	VOL=0dB	-2.0	0.0	2.0	dB
Minimum Gain	G _{VMIN}	VOL=Mute, Vin=1Vrms BW=400Hz to 30kHz	-	-	-70	dB
Channel Balance	G _{CB}	VOL=0dB	-1.5	0.0	1.5	dB
Balance Level A-A	BAL _{AA}	Full panning to Ach, OUTa	-2.0	0.0	2.0	dB
Balance Level A-B	BAL _{AB}	Full panning to Ach, OUTb Vin=1Vrms BW=400Hz to 30kHz	-	-	-70	dB
Balance Level B-B	BAL _{BB}	Full panning to Bch, OUTb	-2.0	0.0	2.0	dB
Balance Level B-A	BAL _{BA}	Full panning to Bch, OUTa Vin=1Vrms BW=400Hz to 30kHz	-	-	-70	dB
Total Harmonic Distortion	THD	Vo=0.5Vrms BW=400Hz to 30kHz	-	0.02	0.1	%
Input Selector Cross Talk	CT	Vin=1Vrms BW=400Hz to 30kHz	-	-	-70	dB
Channel Separation	CS	Vin=1Vrms BW=400Hz to 30kHz	-	-	-70	dB
Output Noise 1	V _{NO1}	VOL=0dB BW=400Hz to 30kHz	-	-90 (31.6)	-85 (56.2)	dBV (μVrms)
Output Noise 2	V _{NO2}	VOL=Mute BW=400Hz to 30kHz	-	-106 (5.0)	-96	dBV (μVrms)
Output Noise 3	V _{NO3}	LINEOUT, VOL=0dB BW=400Hz to 30kHz	-	-85 (56.2)	-80 (100)	dBV (μVrms)
Output Noise 4	V _{NO4}	LINEOUT, VOL=Mute BW=400Hz to 30kHz	-	-101 (8.9)	-91	dBV (μVrms)

■ **ELECTRICAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$, $V^+=9\text{V}$, $R_g=600\Omega$, $R_L=47\text{k}\Omega$, $V_{in}=100\text{mVrms}/1\text{kHz}$)

● **TONE CONTROL** (Tone Control-ON)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
High Frequency Boost	HF_{BST}	TREBLE=+15dB, $f=10\text{kHz}$	12.5	15.0	17.5	dB
High Frequency Flat	HF_{FLT}	TRBE=0dB, $f=10\text{kHz}$	-2.0	0.0	2.0	dB
High Frequency Cut	HF_{CUT}	TREBLE=-15dB, $f=10\text{kHz}$	-17.5	-15.0	-12.5	dB
Low Frequency Boost	LF_{BST}	BASS=+15dB, $f=50\text{Hz}$	12.5	15.0	17.5	dB
Low Frequency Flat	LF_{FLT}	BASS=0dB, $f=50\text{Hz}$	-2.0	0.0	2.0	dB
Low Frequency Cut	LF_{CUT}	BASS=-15dB, $f=50\text{Hz}$	-17.5	-15.0	-12.5	dB

● **SUB-TONE CONTROL** (Sub-Tone Control-ON)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
High Frequency Boost	SHF_{BST}	SUB-TREBLE=+3dB, $f=10\text{kHz}$	2.0	3.0	4.0	dB
High Frequency Flat	SHF_{FLT}	SUB-TREBLE=0dB, $f=10\text{kHz}$	-2.0	0.0	2.0	dB
High Frequency Cut	SHF_{CUT}	SUB-TREBLE=-3dB, $f=10\text{kHz}$	-4.0	-3.0	-2.0	dB
Low Frequency Boost	SLF_{BST}	SUB-BASS=+3dB, $f=50\text{Hz}$	2.0	3.0	4.0	dB
Low Frequency Flat	SLF_{FLT}	SUB-BASS=0dB, $f=50\text{Hz}$	-2.0	0.0	2.0	dB
Low Frequency Cut	SLF_{CUT}	SUB-BASS=-3dB, $f=50\text{Hz}$	-4.0	-3.0	-2.0	dB

● **AGC** (AGC-ON)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
AGC BOOST	AGC_{BST}	$V_{in}=50\text{mVrms}$	1.5	3.5	5.5	dB
AGC FLAT 1	AGC_{FLT1}	$V_{in}=300\text{mVrms}$	-2.5	0.0	2.5	dB
AGC FLAT 2	AGC_{FLT2}	$V_{in}=400\text{mVrms}$	-2.5	0.0	2.5	dB
AGC FLAT 3	AGC_{FLT3}	$V_{in}=500\text{mVrms}$	-2.5	0.0	2.5	dB
AGC FLAT 4	AGC_{FLT4}	$V_{in}=600\text{mVrms}$	-2.5	0.0	2.5	dB
AGC CUT	AGC_{CUT}	$V_{in}=2\text{Vrms}$	-14	-10	-6.0	dB

● **BBE** (BBE-ON)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
BBE Low Frequency Boost Level	BBE_{LOW}	BBE-Low=+15dB	-	15.0	-	dB
BBE High Frequency Boost Level	BBE_{HIGH}	BBE-High=+15dB	-	15.0	-	dB

■ **ELECTRICAL CHARACTERISTICS** ($T_a=25^{\circ}\text{C}$, $V^+=9\text{V}$, $R_g=600\Omega$, $R_L=47\text{k}\Omega$, $V_{in}=100\text{mV}_{rms}$)


● **SIMULATED SURROUND** (Simulated Surround-ON, $f=1\text{kHz}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
SURROUND SIM A	SR_{SMA}	$A_{in}+B_{in} \rightarrow A_{out}$	1.0	3.0	5.0	dB
SURROUND SIM B	SR_{SMB}	$A_{in}+B_{in} \rightarrow B_{out}$	1.0	3.0	5.0	dB

● **SRS 3D-Stereo** (SRS 3D Stereo-ON, $f=125\text{Hz}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
SRS GAIN HIGH 1	SRS_{GH1}	$A_{in} \rightarrow A_{out}$, Mode=High	10.0	12.0	14.0	dB
SRS GAIN HIGH 2	SRS_{GH2}	$B_{in} \rightarrow B_{out}$, Mode=High	10.0	12.0	14.0	dB
SRS GAIN LOW 1	SRS_{GL1}	$A_{in} \rightarrow A_{out}$, Mode=Low	7.0	9.0	11.0	dB
SRS GAIN LOW 2	SRS_{GL2}	$B_{in} \rightarrow B_{out}$, Mode=Low	7.0	9.0	11.0	dB
SRS GAIN HIGH 3	SRS_{GH3}	$B_{in} \rightarrow A_{out}$, Mode=High	6.8	8.8	10.8	dB
SRS GAIN HIGH 4	SRS_{GH4}	$A_{in} \rightarrow B_{out}$, Mode=High	6.8	8.8	10.8	dB

APPLICATION CIRCUIT

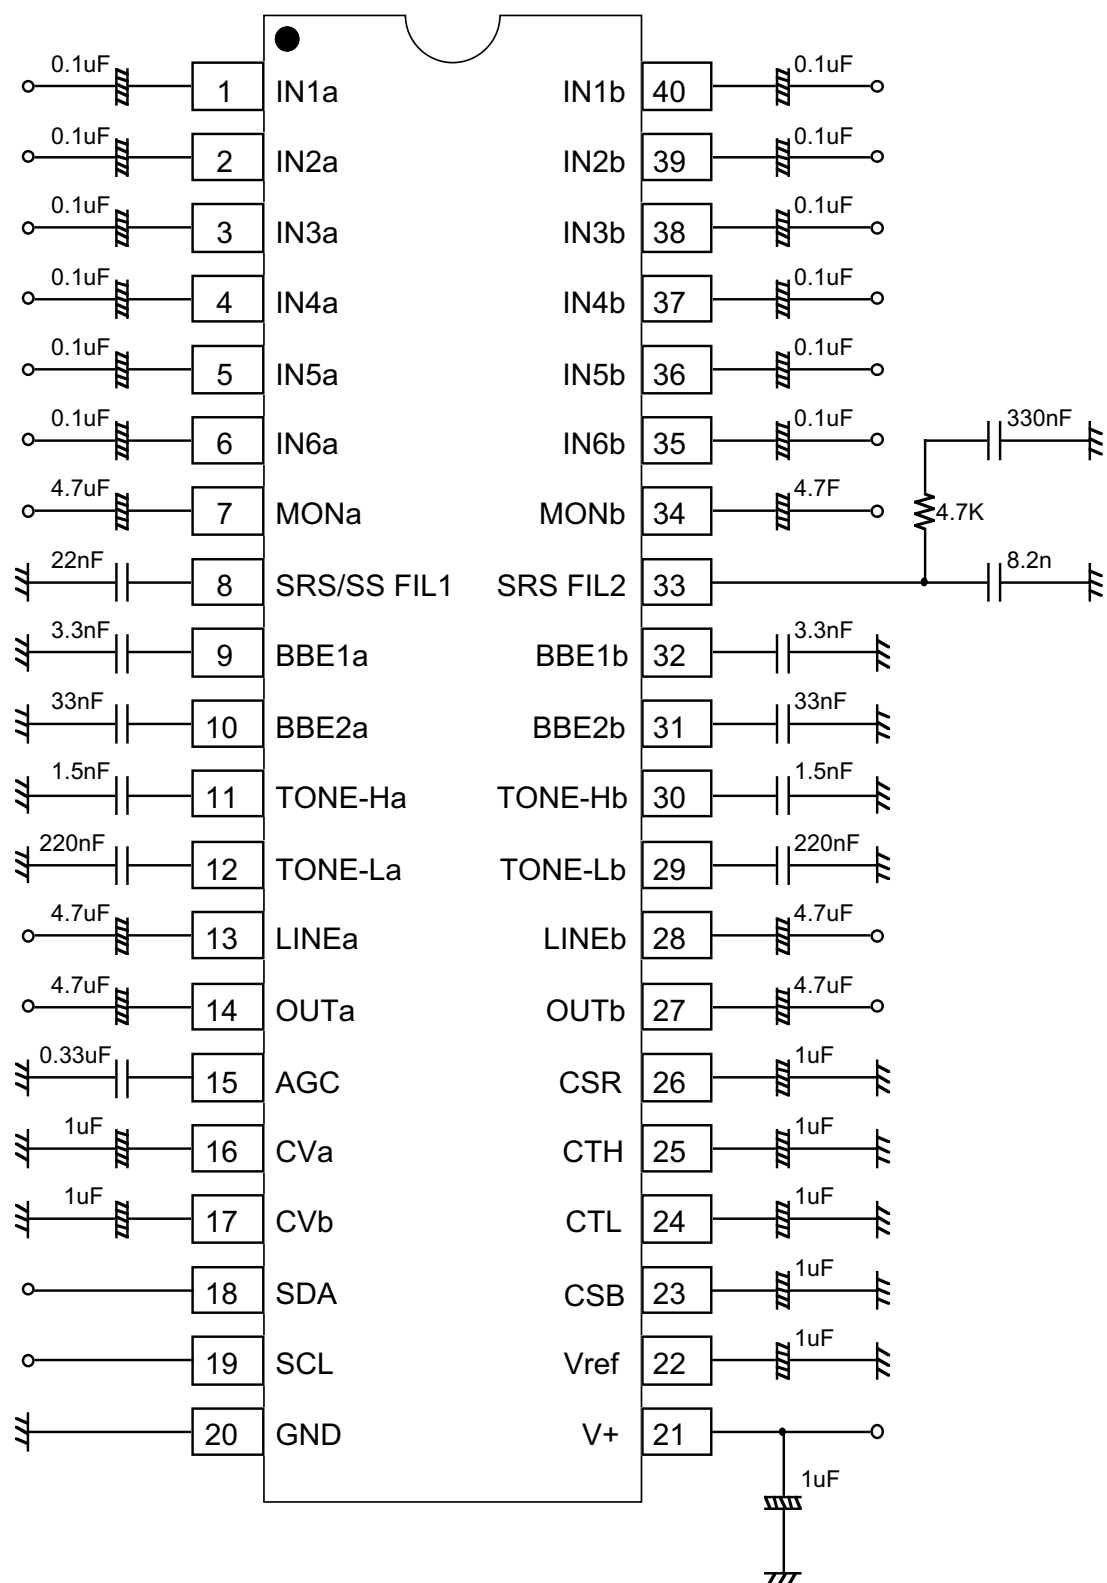


■ I²C BUS Block CHARACTERISTICS (SDA, SCL)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT
High Level Input Voltage	V _{IH}	3.0	-	5.0	V
Low Level Input Voltage	V _{IL}	0	-	1.5	V
High Level Input Current	I _{IH}	-	-	10	μA
Low Level Input Current	I _{IL}	-	-	10	μA
Low Level Output Voltage (3mA at SDA pin)	V _{OL}	0	-	0.4	V
Maximum Output Current	I _{OL}	-3.0	-	-	mA
Maximum Clock Frequency	f _{SCL}	0	-	100	kHz
Data Change Minimum Waiting Time	t _{BUF}	4.7	-	-	μS
Data Transfer Start Minimum Waiting Time	t _{HD:STA}	4.0	-	-	μS
Low Level Clock Pulse Width	t _{LOW}	4.7	-	-	μS
High Level Clock Pulse Width	T _{HIGH}	4.0	-	-	μS
Minimum Start Preparation Waiting Time	t _{SU:STA}	4.7	-	-	μS
Minimum Data Hold Time	t _{HD:DAT}	5.0	-	-	μS
Minimum Data Preparation Time	t _{SU:DAT}	250	-	-	nS
Rise Time	t _R	-	-	1.0	μS
Fall Time	t _F	-	-	300	nS
Minimum Stop Preparation Waiting Time	t _{SU:STO}	4.7	-	-	μS

I²C BUS Load Condition: Pull up resistance 4kΩ (Connected to +5V)

Load capacitance 200pF (Connected to GND)

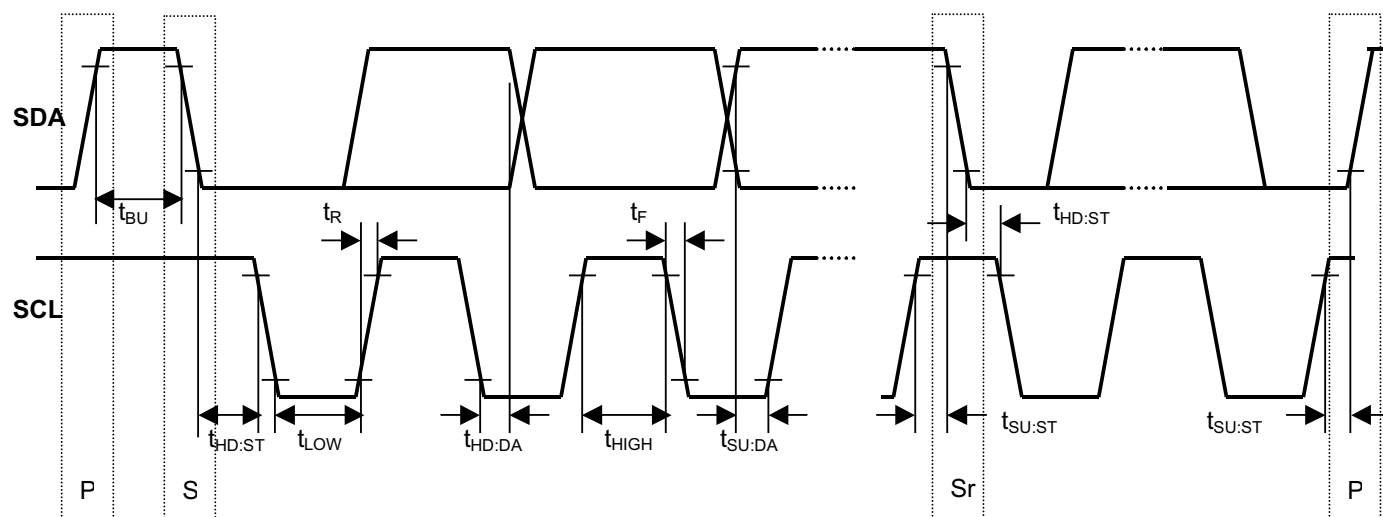

■ DEFINITION OF I²C REGISTER

● I²C BUS FORMAT

MSB	LSB	MSB	LSB	MSB	LSB		
S	Slave Address	A	Select Address	A	Data	A	P
1bit	8bit	1bit	8bit	1bit	8bit	1bit	1bit

S: Starting Term

A: Acknowledge Bit

P: Ending Term

● SLAVE ADDRESS

MSB							LSB
1	0	0	0	0	0	1	R/W

R/W=0: Receive Only

● CONTROL REGISTER TABLE

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
00H	VOL							
01H	CHS	BAL					SR1	SR0
02H	BCB	BASS				BCSB	SUB-BASS	
03H	BCT	TREB				BCST	SUB-TREB	
04H	BBE-Low				BBE-High			
05H	OUT	SEL			AGC1	AGC0	AGC	BBE

● CONTROL REGISTER DEFAULT VALUE

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
00H	0	0	0	0	0	0	0	0
01H	0	0	0	0	0	0	0	0
02H	0	0	0	0	0	0	0	0
03H	0	0	0	0	0	0	0	0
04H	0	0	0	0	0	0	0	0
05H	0	0	0	0	0	0	0	0

■ I²C CONTROL COMMAND DESCRIPTION

● MASTER VOLUME CONTROL

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
00H	VOL							

The attenuator is consisted of both the Volume1 and Volume2. The total attenuation level is summing of each attenuation level of the Volume1 and Volume2. The attenuation for both the Volume1 and Volume2 are always synchronized to have the same attenuation levels for each other, and are not controllable independently for each other.

- "VOL" : Sets the total attenuation level for the both Ach and Bch(up to 84dB, 0.33dB/step)

For the detail, you can refer to the table on the page 12.

● CHANNEL BALANCE AND SURROUND MODE CONTROL

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
01H	CHS	BAL					SR1	SR0

◆ Channel Balance Control

To control the balance between Ach and Bch, the both commands "CHS" and "BAL" should be set. For example, to move a sound image to Ach-side, Bch should be attenuated with no attenuation on Ach. The command "CHS" defines the channel should be attenuate, and the command "BAL" defines the attenuation level itself. The attenuation for the balance control is consisted of the both Volume1 and Volume2, has the same structure with Master Volume Control described above.

- "CHS" : Defines the channel should be attenuated

The channel should be attenuated	CHS (D7)
Bch	0
Ach	1

- "BAL" : Defines the attenuation level for the specified channel with command "CHS"(up to 30dB, 1dB/Step)

For the detail, you can refer to the table on the page 14.

◆ Surround Mode Control

- "SR1", "SR0" : Surround Mode Switch

Surround Mode	SR1 (D1)	SR0 (D0)
Surround OFF (Bypass)	0	0
NJRC Original Simulated Surround	0	1
SRS 3D-Stereo – High Mode	1	0
SRS 3D-Stereo – Low Mode	1	1

●BASS-TONE CONTROL SETTING

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
02H	BCB	BASS				BCSB	SUB-BASS	

- "BCB" : Defines the Bass-Tone Control Mode as Boost or Cut

Bass Tone Control Mode	BCB (D7)
Cut	0
Boost	1

- "BASS" : Sets the Cut or Boost level for Bass-Tone Control(up to 15dB, 1dB/Step)
For the detail, you can refer to the table on the page 15.

- "BCSB" : Defines the Sub-Bass-Tone Control Mode as Boost or Cut

Sub-Bass Tone Control Mode	BCSB (D2)
Cut	0
Boost	1

- "SUB-BASS" : Sets the Cut or Boost level for Sub-Bass-Tone Control(up to 3dB, 1dB/Step)
For the detail, you can refer to the table on the page 15.

●TREBLE-TONE CONTROL SETTING

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
03H	BCT	TREB				BCST	SUB-TREB	

- "BCT" : Defines the Treble-Tone Control Mode as Boost or Cut

Treble-Tone Control Mode	BCT (D7)
Cut	0
Boost	1

- "TREB" : Sets the Cut or Boost level for Treble-Tone Control(up to 15dB, 1dB/Step)
For the detail, you can refer to the table on the page 15.

- "BCST" : Defines the Sub-Treble-Tone Control Mode as Boost or Cut

Sub-Treble-Tone Control Mode	BCST (D2)
Cut	0
Boost	1

- "SUB-TREB" : Sets the Cut or Boost level for Sub-Treble-Tone Control(up to 3dB, 1dB/Step)
For the detail, you can refer to the table on the page 15.

●BBE BOOST LEVEL SETTING

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
04H	BBE-Low				BBE-High			

The command “BBE-Low” and “BBE-High” can set the only BBE boost level, not BBE ON/OFF control. To activate the BBE, the command “BBE”(Address=05H) must be ON.

- “BBE-Low” : Sets the BBE low frequency boost level(up to 15dB, 1dB/Step)
- “BBE-High” : Sets the BBE high frequency boost level(up to 15dB, 1dB/Step)

For the detail, you can refer to the table on the page 16.

●OUTPUT ON/OFF, INPUT SELECTOR, AGC and BBE ON/OFF CONTROL

Select Address	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
05H	OUT	SEL			AGC1	AGC0	AGC	BBE

◆Output ON/OFF

- “OUT” : Output ON/OFF Switch

Output	OUT (D7)
Output OFF(Mute)	0
Output ON	1

◆Input Selector

- “SEL” : Input Selector Control

For the detail, you can refer to the table on the page 17.

◆AGC Control

- “AGC1”, “AGC0” : Set the AGC Flat Level
- “AGC” : AGC ON/OFF Switch

AGC Flat Level	AGC1 (D3)	AGC0 (D2)	AGC (D0)
300mVrms	0	0	1
400mVrms	0	1	1
500mVrms	1	0	1
600mVrms	1	1	1
AGC OFF	-	-	0

◆BBE ON/OFF Control

- “BBE” : BBE ON/OFF Switch

BBE ON/OFF	BBE (D0)
BBE OFF	0
BBE ON	1

■ I²C CONTROL COMMAND SETTING TABLE

● MASTER VOLUME CONTROL (Select Address : 00H)

Gain (dB)	HEX	VOL							
		D7	D6	D5	D4	D3	D2	D1	D0
0	FF	1	1	1	1	1	1	1	1
-1	FC	1	1	1	1	1	1	0	0
-2	F9	1	1	1	1	1	0	0	1
-3	F6	1	1	1	1	0	1	1	0
-4	F3	1	1	1	1	0	0	1	1
-5	F0	1	1	1	1	0	0	0	0
-6	ED	1	1	1	0	1	1	0	1
-7	EA	1	1	1	0	1	0	1	0
-8	E7	1	1	1	0	0	1	1	1
-9	E4	1	1	1	0	0	1	0	0
-10	E1	1	1	1	0	0	0	0	1
-11	DE	1	1	0	1	1	1	1	0
-12	DB	1	1	0	1	1	0	1	1
-13	D8	1	1	0	1	1	0	0	0
-14	D5	1	1	0	1	0	1	0	1
-15	D2	1	1	0	1	0	0	1	0
-16	CF	1	1	0	0	1	1	1	1
-17	CC	1	1	0	0	1	1	0	0
-18	C9	1	1	0	0	1	0	0	1
-19	C6	1	1	0	0	0	1	1	0
-20	C3	1	1	0	0	0	0	1	1
-21	C0	1	1	0	0	0	0	0	0
-22	BD	1	0	1	1	1	1	0	1
-23	BA	1	0	1	1	1	0	1	0
-24	B7	1	0	1	1	0	1	1	1
-25	B4	1	0	1	1	0	1	0	0
-26	B1	1	0	1	1	0	0	0	1
-27	AE	1	0	1	0	1	1	1	0
-28	AB	1	0	1	0	1	0	1	1
-29	A8	1	0	1	0	1	0	0	0
-30	A5	1	0	1	0	0	1	0	1
-31	A2	1	0	1	0	0	0	1	0
-32	9F	1	0	0	1	1	1	1	1
-33	9C	1	0	0	1	1	1	0	0
-34	99	1	0	0	1	1	0	0	1
-35	96	1	0	0	1	0	1	1	0
-36	93	1	0	0	1	0	0	1	1
-37	90	1	0	0	1	0	0	0	0
-38	8D	1	0	0	0	1	1	0	1
-39	8A	1	0	0	0	1	0	1	0
-40	87	1	0	0	0	0	1	1	1

(MASTER VOLUME CONTROL cont'd)

		VOL							
Gain (dB)	HEX	D7	D6	D5	D4	D3	D2	D1	D0
-41	84	1	0	0	0	0	1	0	0
-42	81	1	0	0	0	0	0	0	1
-43	7E	0	1	1	1	1	1	1	0
-44	7B	0	1	1	1	1	0	1	1
-45	78	0	1	1	1	1	0	0	0
-46	75	0	1	1	1	0	1	0	1
-47	72	0	1	1	1	0	0	1	0
-48	6F	0	1	1	0	1	1	1	1
-49	6C	0	1	1	0	1	1	0	0
-50	69	0	1	1	0	1	0	0	1
-51	66	0	1	1	0	0	1	1	0
-52	63	0	1	1	0	0	0	1	1
-53	60	0	1	1	0	0	0	0	0
-54	5D	0	1	0	1	1	1	0	1
-55	5A	0	1	0	1	1	0	1	0
-56	57	0	1	0	1	0	1	1	1
-57	54	0	1	0	1	0	1	0	0
-58	51	0	1	0	1	0	0	0	1
-59	4E	0	1	0	0	1	1	1	0
-60	4B	0	1	0	0	1	0	1	1
-61	48	0	1	0	0	1	0	0	0
-62	45	0	1	0	0	0	1	0	1
-63	42	0	1	0	0	0	0	1	0
-64	3F	0	0	1	1	1	1	1	1
-65	3C	0	0	1	1	1	1	0	0
-66	39	0	0	1	1	1	0	0	1
-67	36	0	0	1	1	0	1	1	0
-68	33	0	0	1	1	0	0	1	1
-69	30	0	0	1	1	0	0	0	0
-70	2D	0	0	1	0	1	1	0	1
-71	2A	0	0	1	0	1	0	1	0
-72	27	0	0	1	0	0	1	1	1
-73	24	0	0	1	0	0	1	0	0
-74	21	0	0	1	0	0	0	0	1
-75	1E	0	0	0	1	1	1	1	0
-76	1B	0	0	0	1	1	0	1	1
-77	18	0	0	0	1	1	0	0	0
-78	15	0	0	0	1	0	1	0	1
-79	12	0	0	0	1	0	0	1	0
-80	0F	0	0	0	0	1	1	1	1
-81	0C	0	0	0	0	1	1	0	0
-82	09	0	0	0	0	1	0	0	1
-83	06	0	0	0	0	0	1	1	0
-84	03	0	0	0	0	0	0	1	1
Mute	00	0	0	0	0	0	0	0	0

●CHANNEL BALANCE CONTROL(Select Address : 01H)

Gain(dB)	BAL				
	D6	D5	D4	D3	D2
0	0	0	0	0	0
-1	0	0	0	0	1
-2	0	0	0	1	0
-3	0	0	0	1	1
-4	0	0	1	0	0
-5	0	0	1	0	1
-6	0	0	1	1	0
-7	0	0	1	1	1
-8	0	1	0	0	0
-9	0	1	0	0	1
-10	0	1	0	1	0
-11	0	1	0	1	1
-12	0	1	1	0	0
-13	0	1	1	0	1
-14	0	1	1	1	0
-15	0	1	1	1	1
-16	1	0	0	0	0
-17	1	0	0	0	1
-18	1	0	0	1	0
-19	1	0	0	1	1
-20	1	0	1	0	0
-21	1	0	1	0	1
-22	1	0	1	1	0
-23	1	0	1	1	1
-24	1	1	0	0	0
-25	1	1	0	0	1
-26	1	1	0	1	0
-27	1	1	0	1	1
-28	1	1	1	0	0
-29	1	1	1	0	1
-30	1	1	1	1	0
Mute	1	1	1	1	1

●BASS-TONE CONTROL(Select Address : 02H)

/ TREBLE-TONE CONTROL(Select Address : 03H)

		BASS TREB			
Cut Gain(dB)	Boost Gain(dB)	D6	D5	D4	D3
0	0	0	0	0	0
-1	1	0	0	0	1
-2	2	0	0	1	0
-3	3	0	0	1	1
-4	4	0	1	0	0
-5	5	0	1	0	1
-6	6	0	1	1	0
-7	7	0	1	1	1
-8	8	1	0	0	0
-9	9	1	0	0	1
-10	10	1	0	1	0
-11	11	1	0	1	1
-12	12	1	1	0	0
-13	13	1	1	0	1
-14	14	1	1	1	0
-15	15	1	1	1	1

●SUB-BASS-TONE CONTROL(Select Address : 02H)

/ SUB-TREBLE-TONE CONTROL(Select Address : 03H)

		SUB-BASS SUB-TREB	
Cut Gain(dB)	Boost Gain(dB)	D1	D0
0	0	0	0
-1	1	0	1
-2	2	1	0
-3	3	1	1

●BBE Low-Frequency Boost Level(Select Address : 04H)

	BBE-Low			
Boost Gain(dB)	D6	D5	D4	D3
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
10	1	0	1	0
11	1	0	1	1
12	1	1	0	0
13	1	1	0	1
14	1	1	1	0
15	1	1	1	1

●BBE High-Frequency Boost Level(Select Address : 04H)

	BBE-High			
Boost Gain(dB)	D3	D2	D1	D0
0	0	0	0	0
1	0	0	0	1
2	0	0	1	0
3	0	0	1	1
4	0	1	0	0
5	0	1	0	1
6	0	1	1	0
7	0	1	1	1
8	1	0	0	0
9	1	0	0	1
10	1	0	1	0
11	1	0	1	1
12	1	1	0	0
13	1	1	0	1
14	1	1	1	0
15	1	1	1	1

●Input Selector Control(Select Address : 05H)

Input Channel Selected	SEL		
	D6	D5	D4
1	0	0	0
2	0	0	1
3	0	1	0
4	0	1	1
5	1	0	0
6	1	0	1

■ NOTE

1)The **NJW1134** is manufactured by New Japan Radio Co., Ltd. under license from BBE Sound Inc. BBE is a registered trademark of BBE Sound Inc. A license from BBE Sound Inc. must be required before the **NJW1134** can be purchased from New Japan Radio Co., Ltd.

BBE Sound, Inc.
5381 Production Drive
Huntington Beach, CA 92649 USA
Tel : (714)897-6766 Fax : (714)896-0736

2)The SRS technology right incorporated in the **NJW1134** is owned by SRS Labs, a U.S. Corporation and licensed to New Japan Radio Co., Ltd. SRS is protected under U.S. and foreign patents issued and/or pending. SRS and the (●) , are trademarks of SRS Labs, Inc. in the United States and selected foreign countries. Neither the purchase of the NJW1134, nor the corresponding sale of audio enhancement equipment conveys the right to sell commercialized recording made with any SRS technology.

SRS Labs requires that all users of the **NJW1134** must enter into a license agreement directly with SRS Labs if the royalty is not included in the purchase price. SRS Labs also requires any users to company with all rules and regulations as outlined in the SRS Trademark Usage Manual.

For further information, please contact:
SRS Labs, Inc.
2909 Daimler Street, Santa Ana, CA 92705 USA
Tel : (714)442-1070 Fax: : (714)852-1099 www.srslabs.com

3)Purchase of I2C components of New Japan Radio Co., Ltd or one of its sublicensed Associated Companies conveys a license under the Philips I2C Patent Rights to use these components in an I2C system, provided that the system conforms to the I2C Standard Specification as defined by Philips.

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.