
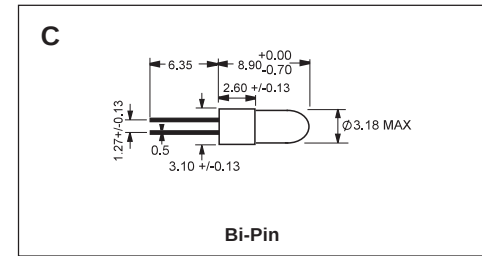


T-¾ Lamps , Visible-Infrared

Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Drawing
4115	5.0	0.115	0.150	40,000	CC-6	A
4115-2A	5.0	0.115	0.150	40,000	CC-6	B

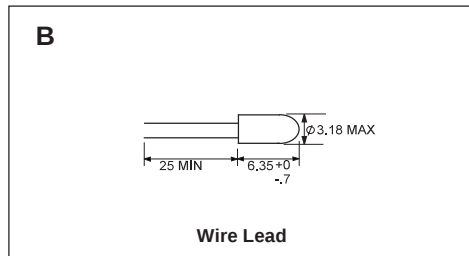


T-1 Lamps, Visible-Infrared

Part No.	Volts	Amps	M.S.C.P.	Life Hours	Filament Type	Drawing
1045	5.0	0.045	0.060	10,000	CC-6	B
1045-9A	5.0	0.045	0.060	10,000	CC-6	C
1600	5.0	0.060	0.050	100,000	CC-6	B
1600-9A	5.0	0.060	0.050	100,000	CC-6	C
1150	5.0	0.115	0.150	40,000	CC-6	B
1150-9A	5.0	0.115	0.150	40,000	CC-6	C
1088	5.0	0.140	0.200	18,000	CC-6	B
1088-9A	5.0	0.140	0.200	18,000	CC-6	C



Straight Double Coiled CC-6 Filament

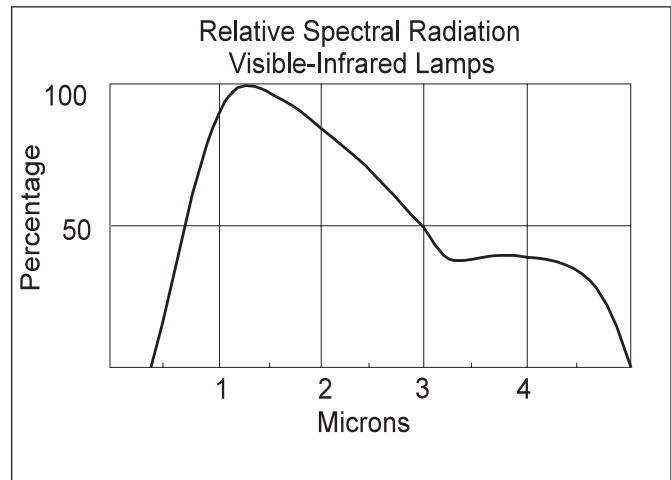

Double coiled CC-6 tungsten filaments and thin wall glass envelopes contribute to the improved infrared radiation of these lamps.