



Inductive sensor

Ni25-G47-AP4X



- threaded barrel, PG36
- chrome-plated brass
- 3-wire DC, 10...65 VDC
- normally open pnp output
- cable connection

Wiring diagram



Function principles

Inductive proximity switches are designed for wear-free non-contact detection of metal objects. For this they use a high-frequency electro-magnetic AC field that interacts with the target. With inductive sensors, this field is generated by an LC resonant circuit with a ferrite core coil.

Type	Ni25-G47-AP4X
Ident-No.	15646
Rated operating distance Sn	25 mm
Mounting mode	non-flush
Hysteresis (switching distance)	3... 15 %
Min. repeat accuracy	≤ 2 %
Temperature drift	≤ ± 10 %
Operating temperature	-25 ... + 70 °C
Rated operational voltage (DC) U_B	10... 65 VDC
Max. ripple	≤ 10 % U _{pp}
Rated operational current (DC) I _e	≤ 200 mA
No-load current I ₀	≤ 15 mA
Max. OFF-state current	≤ 0,1 mA
Max. switching frequency	≤ 0,1 kHz
Rated insulation voltage	≤ 0,5 kV
Output function	3-wire, normally open, PNP
Short-circuit protection	yes, cyclic
Max. voltage drop at I _e	≤ 1,8 V
Wire breakage / reverse polarity protection	yes / complete
Housing style	threaded barrel; PG36
Dimensions	70 mm
Housing material	metal, CuZn, chrome-plated
Active face	plastic, PA12-GF30
Max. fixing torque of coupling nut	90 Nm
Wiring	cable
Cable	Ø 5,2, LifYY, PVC, 2 m
Cable cross section	3 x 0,75 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 x g (11 ms)
Degree of protection	IP67
Switching status indication	LED yellow

Inductive sensor


Ni25-G47-AP4X

Mounting instructions

	minimum gap
Gap D	3 x B
Gap W	3 x Sn
Gap T	3 x B
Gap S	1,5 x B
Gap G	6 x Sn
Gap N	40 mm

Diameter of active face B

Ø 47 mm

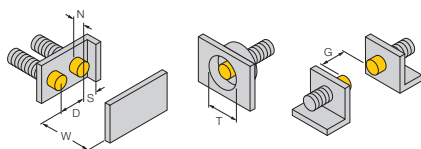

Inductive sensor

Ni25-G47-AP4X

Accessories

Typ	Ident-No.	Description	Dimension drawing
MW47	69452	mounting bracket; material: zinc-plated steel plate	