

SPECIFICATION SHEET

PART NO

48065750

REV

A

SPECIFICATIONS:

Inductance: 10 kHz, 0.1VRMS 1-2+3-4: 850 uH $\pm$ 5%


DCR: (1-3): 0.85 ohms max
(2-4): 0.85 ohms max
(8-6): 0.35 ohms max
(7-5): 0.40 ohms max

Hipot: 1875VAC between Line Side (Pri) and IC side (Sec)

Leakage Inductance: 100 kHz, .1VRMS
1-(2+3)-4, 5+6+7+8 tied: 5 uH max.

Turns Ratio (Pri:Sec): 1.8:1 $\pm$ 2%

Meets the specifications for supplementary insulation
per IEC-950 with a working voltage of 250V.

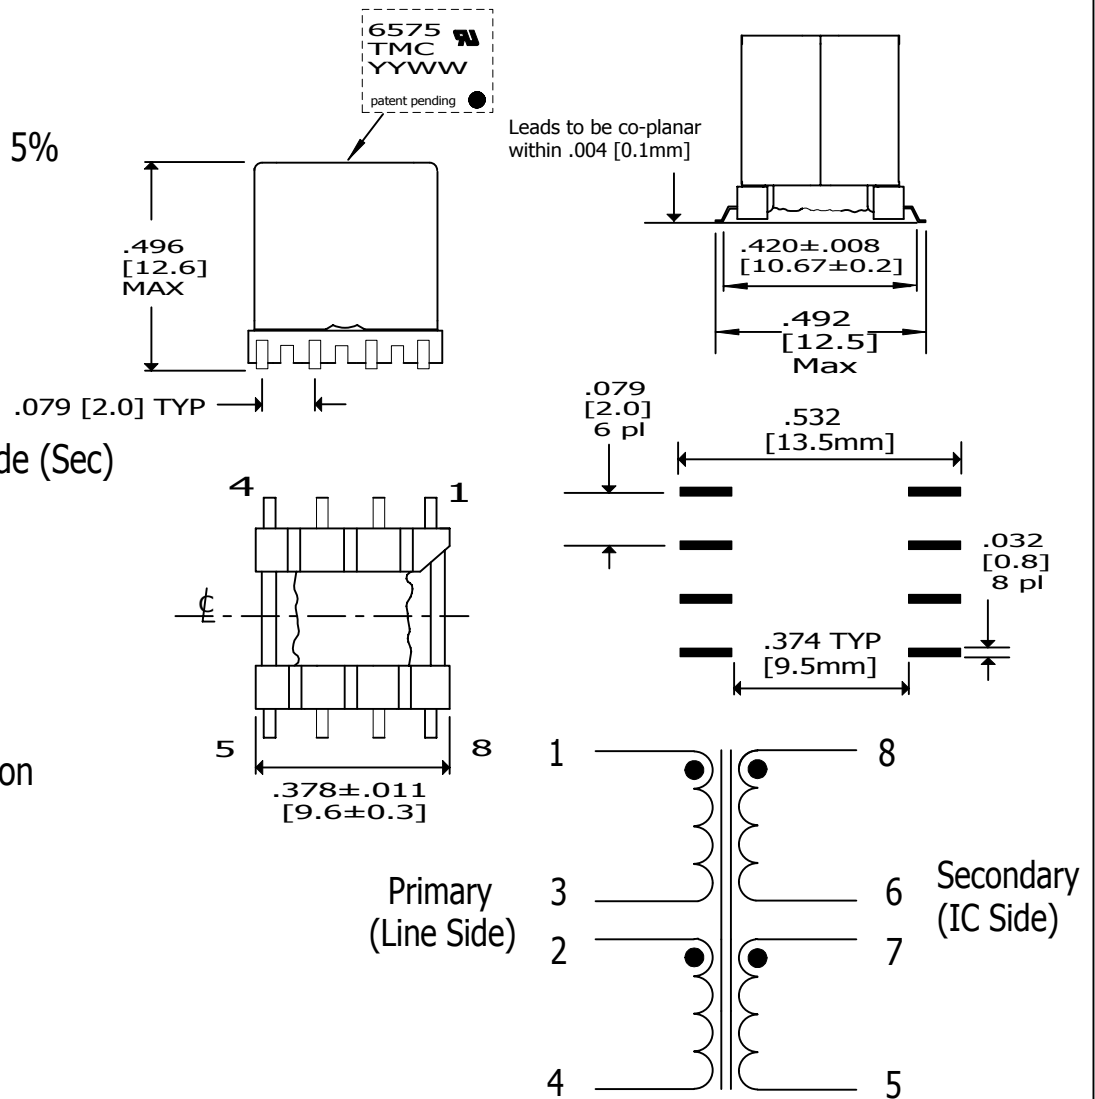

Patent Pending

TRACY MINNTRONIX

1045 CRAIG AVENUE, TRACY, MN 56175

TITLE ADSL over POTS Transformer for CO

For use with Centillium ADSL IC

SHEET 1 OF 1

TEMP CLASS 130 °C

TOLERANCES UNLESS OTHERWISE NOTED

2 PLACES	3 PLACES	ANGLE
$\pm$.03	$\pm$.010	$\pm$ 1°