

SPECIFICATION SHEET

PART NO

48065740

REV

B

SPECIFICATIONS:

Inductance: 10 kHz, 0.1VRMS 1-2+3-4: 100 uH $\pm$ 5%


DCR: (1-3): 0.5 ohms max
(2-4): 0.5 ohms max
(8-6): 0.6 ohms max
(7-5): 0.6 ohms max

Hipot: 1875VAC between Line Side (Pri) and IC side (Sec)

Leakage Inductance: 100 kHz, .1VRMS
1-(2+3)-4, 5+6+7+8 tied: 10 uH max.

Turns Ratio (Pri:Sec): 1.4:1 $\pm$ 2%

Meets the specifications for supplementary insulation
per IEC-950 with a working voltage of 250V.

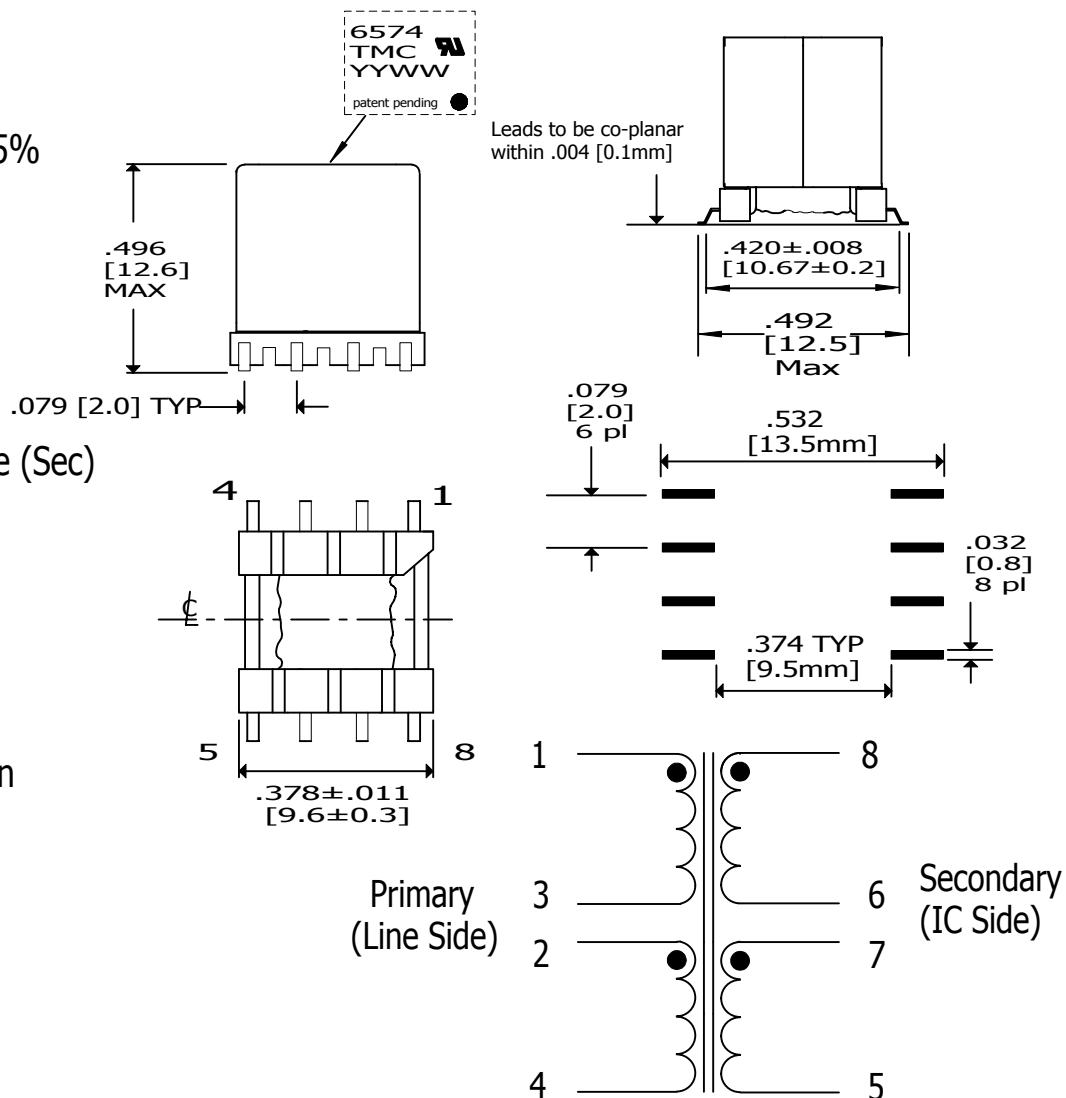

Patent Pending

TRACY MINNTRONIX

1045 CRAIG AVENUE, TRACY, MN 56175

TITLE

ADSL over ISDN Transformer for CO

SHEET

1 OF 1

TOLERANCES

UNLESS OTHERWISE NOTED

For use with Globespan G7266

TEMP CLASS

130 °C

2 PLACES

$\pm$.03

3 PLACES

$\pm$.010

ANGLE

$\pm$ 1°