

SPECIFICATION SHEET

PART NO

48065710

REV

A

SPECIFICATIONS:

Inductance: 10 kHz, 0.1VRMS 1-2+3-4: 410 uH $\pm$ 5%

DCR: (1-3): 0.6 ohms max
(2-4): 0.6 ohms max
(8-6): 0.4 ohms max
(7-5): 0.4 ohms max

Hipot: 1875VAC between Line Side (Pri) and IC side (Sec)


Leakage Inductance: 100 kHz, 0.1VRMS
1-(2+3)-4, 5+6+7+8 tied: 10 uH max.

Longitudinal Balance: 50 dB minimum at 1.1 MHz

Turns Ratio (Pri:Sec): 2:1 $\pm$ 2%

Meets the specifications for supplementary insulation per IEC-950 with
a working voltage of 250V.

Patent Pending

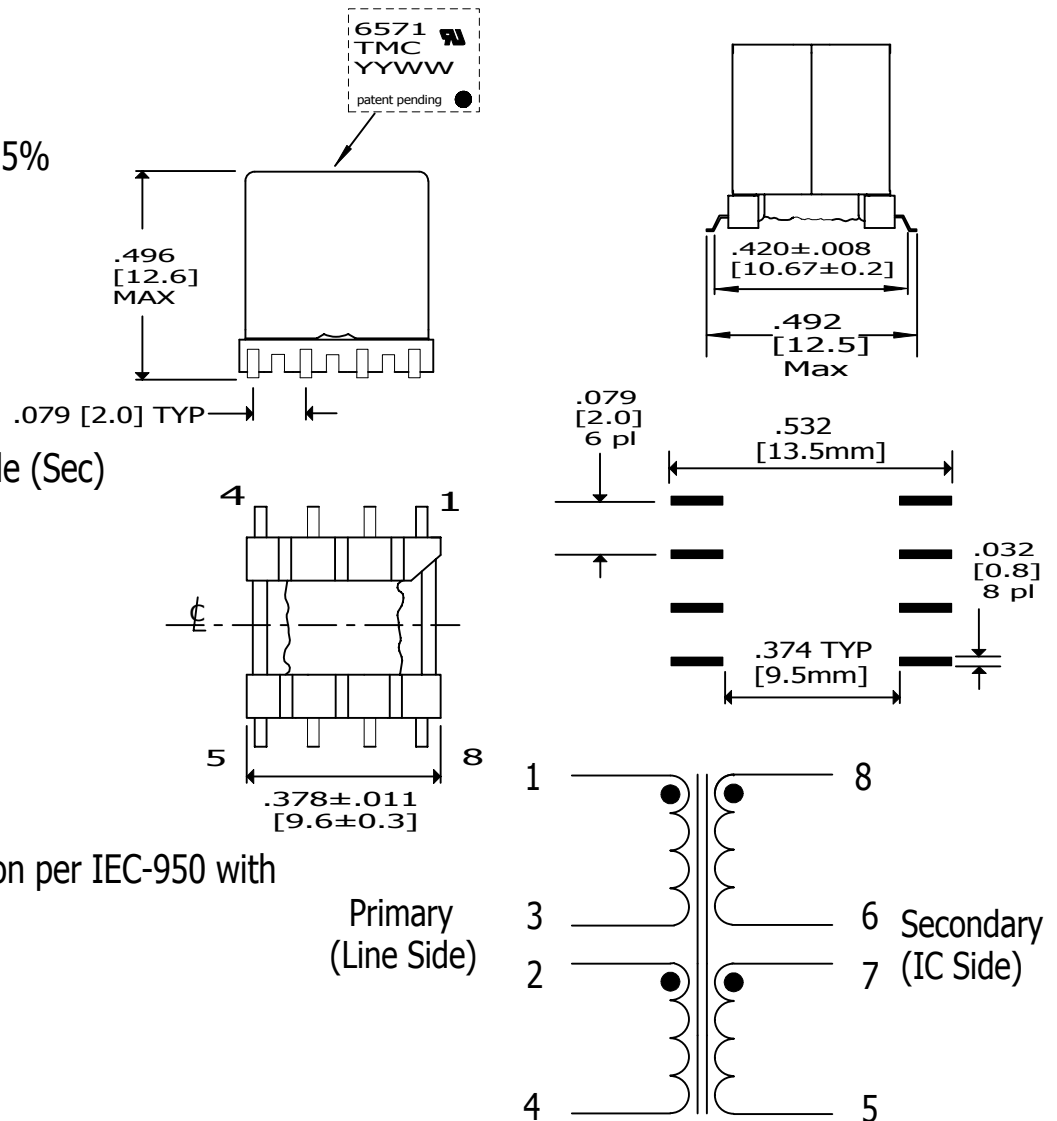

TRACY MINNTRONIX
1045 CRAIG AVENUE, TRACY, MN 56175

TITLE

ADSL Transformer for CO

For use with Alcatel 20150, 20450

SHEET

1 OF 1

TEMP CLASS

130 °C

TOLERANCES

UNLESS OTHERWISE NOTED

2 PLACES	3 PLACES	ANGLE
$\pm$.03	$\pm$.010	$\pm$ 1°