

■ Features

The thermopile sensor consists of a series of 44 thermoelements, forming a sensitive area of $0.5 \times 0.5 \text{ mm}^2$. The sensor is hermetically sealed into a TO-18 metal housing, with optical filter. This standard filter allows measurements to be made in the spectral range above $5 \mu\text{m}$ wavelength. The thermosensor exhibits an almost white noise, comparable to an ohmic resistance. It has a constant signal versus frequency up to its frequency limit, and is directly proportional to incident radiation. The thermopile sensors are featured with an additional thermistor on the same package. The standard version of thermistor is housing connected to ground.

■ Applications

- * Ear thermometers; clinic thermometers
- * Infrared thermometers
- * Consumer applications: hair dryer, micro-wave oven, air conditioner, refrigerator
- * Continuous temperature control of manufacturing
- * Security system
- * Radiation monitor switch system
- * Absorbing measurement for gas analysis
- * Thermoelectric converter
- * Heat flux flowmeter


■ Electrical Characteristics

Parameter	Condition	Min.	Typ.	Max.	Unit
Thermopile					
Number of thermojunctions		---	44	---	
Chip size		---	1920*1725	---	μm^2
Active area	Interference layer	---	500*500	---	μm^2
Thickness of substrate	Silicon-substrate	600	625	650	μm
Resistance of thermopile	25°C	60	70	80	K Ω
Sensitivity	With 5-14 μm filter	40	55	70	V/W
Detecctivity		4*10 ⁷	7*10 ⁷	9*10 ⁷	cm*Hz ^{1/2} /W
Time Constant		---	30	---	ms
Noise voltage		---	34	---	nV/Hz ^{1/2}
NEP		---	0.8	---	nW/Hz ^{1/2}
Temperature range	Operation	-20	---	100	°C
Temperature reference resistor					
Resistance	25°C	29.1	30.0	30.9	K Ω
β value	25°C	3773	3811	3849	


Measured at 1 Hz chopper frequency, within spectral range 5-14 μm , using a blackbody radiator of 500K temperature.

Note : Thermistor should be operated under 1mA.

■ Frequency response

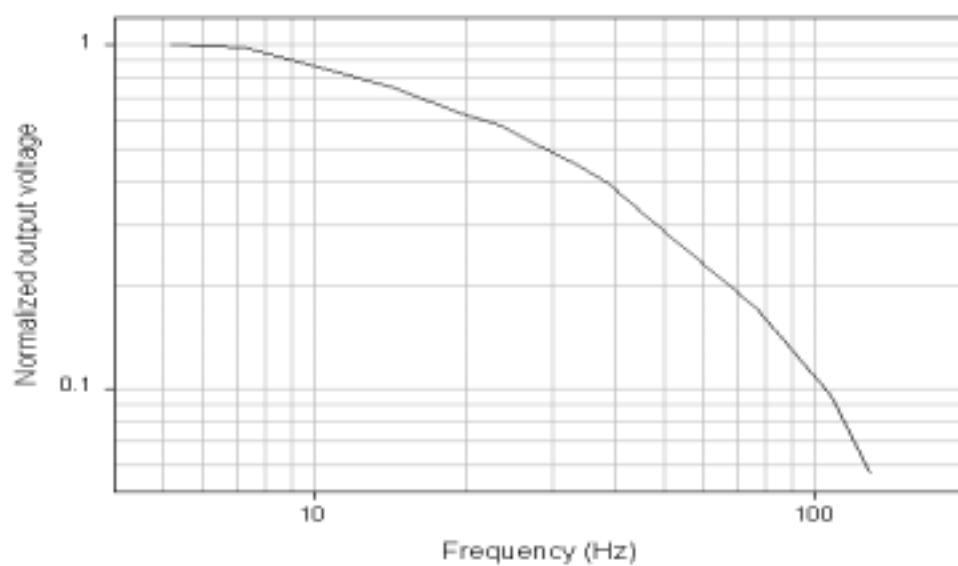


■ Field of view

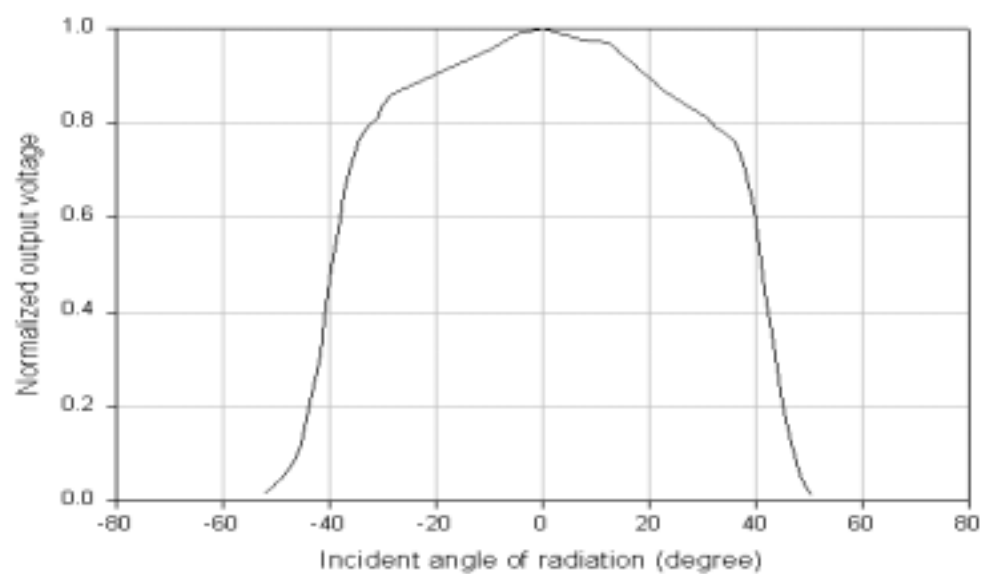

■ Thermistor vs. temperature


The resistance of the temperature reference resistor varies with temperature and the behaviour is illustrated in the following figure.

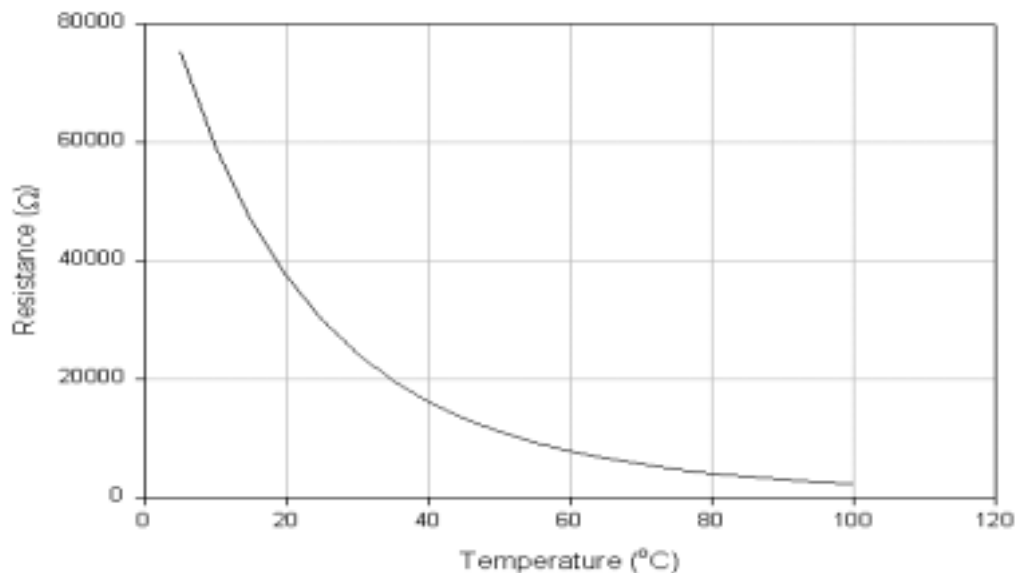


At temperature 25°C, $R(T) = R_{25} e^{\beta \left[\frac{1}{T} - \frac{1}{T_{25}} \right]}$ describes the resistance vs. temperature, where R_{25} is the resistance at ambient temperature 25°C and T, T_{25} are the ambient temperatures in unit of kelvin degrees.

■ Pin assignment & description

- 2 thermistor pin
- 4 thermistor pin (GND)
- 1 thermopile output pin (+)
- 3 thermopile output pin (-)



BACKSIDE VIEW

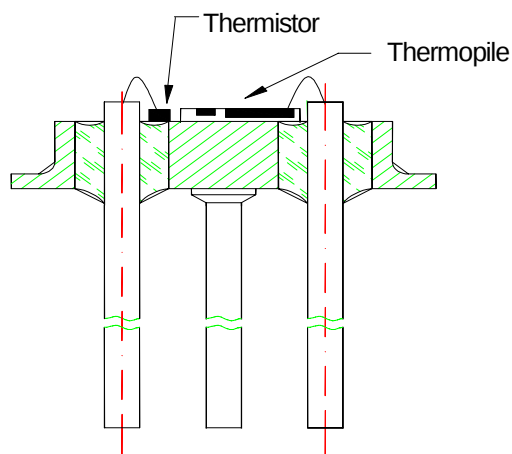


SIDE VIEW

■ Order information : OTC-239-A

- A : 1 : standard filter (5-14 μ m)
- 2 : silicon filter with flat band transmission
- 3 : band pass filter


Transmission of filter

Transmission of optical filter is measured by FTIR from $2\ \mu\text{m}$

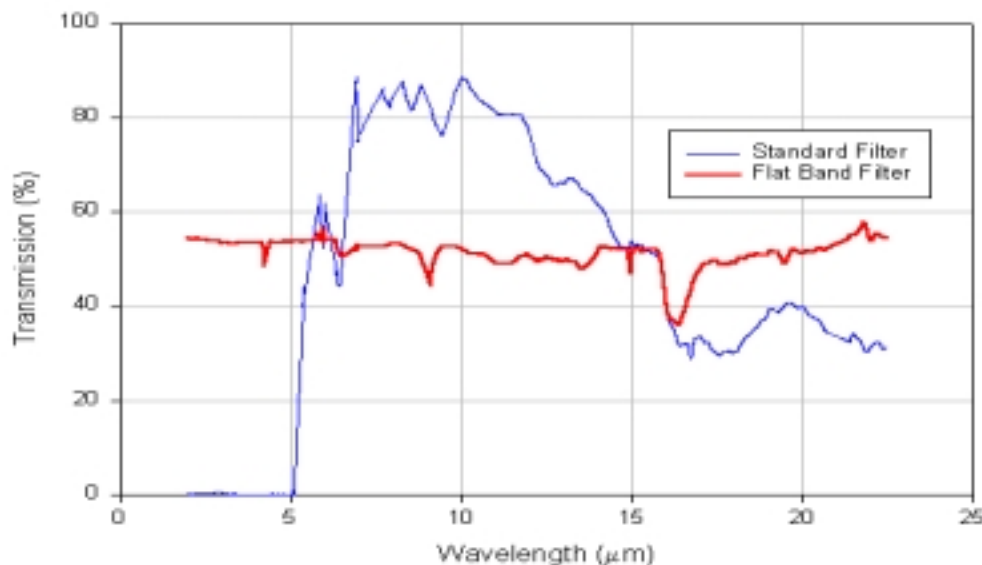


Package

The sensor is hermetically sealed into a TO-18 metal housing, with optical filter. This standard filter allows measurements to be made in the spectral range above $5\ \mu\text{m}$ wavelength. The dimensions of header and cap are shown below.

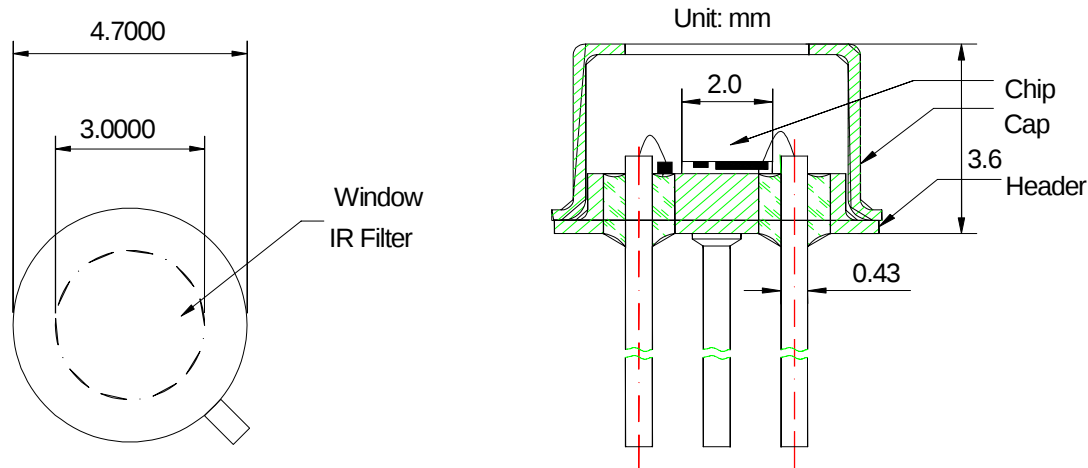

Application circuit

Circuit 1 :

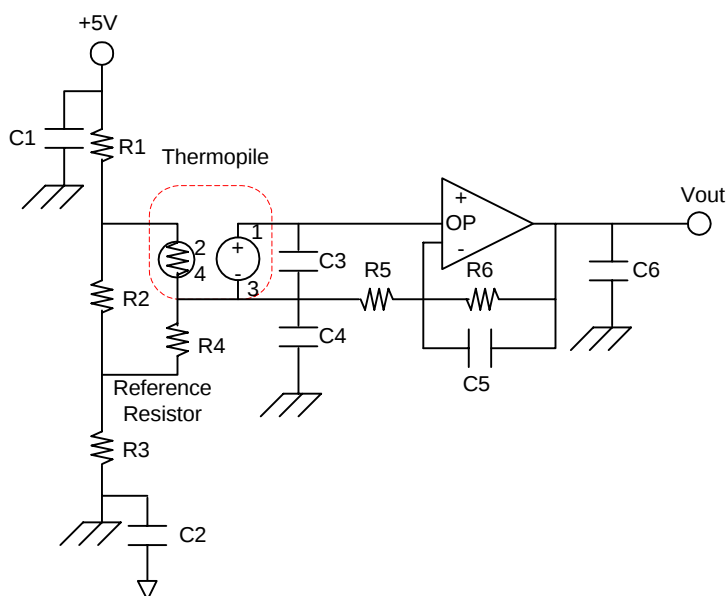

Circuit 2 :

