

Terminations

DC-40 GHz

MILLIMETER WAVE FIXED TERMINATIONS

with 2.9 mm Connector

- DC-40 GHz
- Miniature Size
- Low VSWR
- SMA Compatible





SPECIFICATIONS


FREQUENCY RANGE (GHz)	MODEL	POWER		VSWR (Max)	IMPEDANCE (Ohms)	WEIGHT (Max)	
		AVERAGE (Watts)	PEAK (kW)			Oz	Gr
DC-40	4388	2.0	0.2	1.20	50	0.16	4.5
DC-40	4387	2.0	0.2	1.25	50	0.16	4.5

When ordering specify "M" for male and "F" for female connectors, i.e. 4388F or 4388M.


TYPICAL PERFORMANCE CURVES

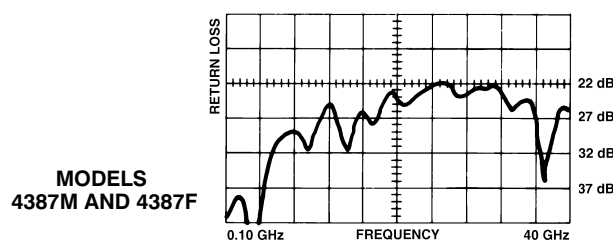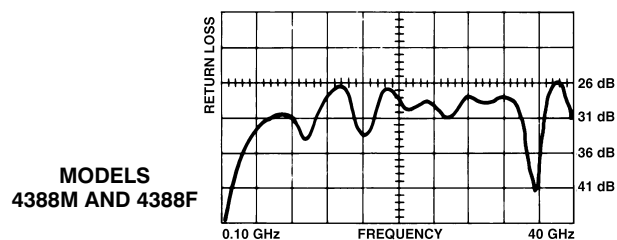

OUTLINE DRAWINGS

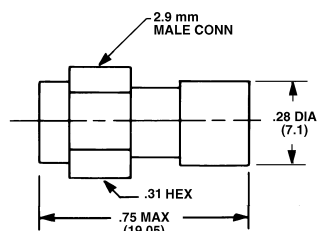

MALE
MODELS 4388M, 4387M

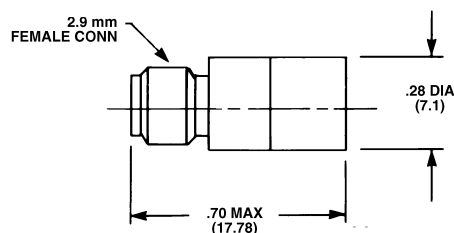

FEMALE
MODELS 4388F, 4387F

TOL: XX = $\pm .02$ (.50)

Dimensions in parentheses are in millimeters and for reference only.