


OE HYBRID

2.48832Gbps Transmitter

OD-J8660-0A01/HA01

OC-48: SR

STM-16: I-16

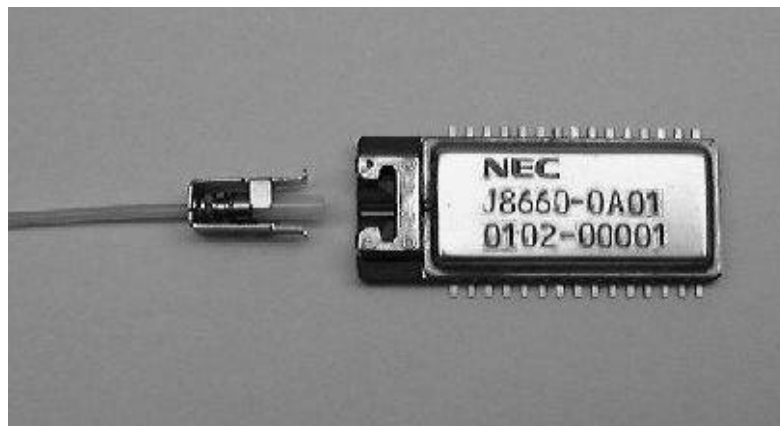

- Contents -

| | |
|-----------------------------------------------------|-----------|
| 1. PRODUCT NUMBER | 3 |
| 2. SPECIFICATIONS..... | 3 |
| 2.1 ABSOLUTE MAXIMUM RATINGS | 3 |
| 2.2 ENVIRONMENTAL CONDITIONS..... | 3 |
| 2.3 OPTICAL SIGNAL INTERFACE SPECIFICATIONS..... | 4 |
| 2.4 ELECTRICAL SIGNAL INTERFACE SPECIFICATIONS..... | 5 |
| 3. FUNCTIONAL BLOCK DIAGRAM..... | 6 |
| 3.1 FUNCTIONAL BLOCK DIAGRAM..... | 6 |
| 3.2 ALARM, MONITOR AND CONTROL FUNCTION..... | 7 |
| 4. RELIABILITY | 7 |
| 4.1 FIT NUMBER..... | 7 |
| 4.2 RELIABILITY TEST ITEMS AND CONDITIONS..... | 7 |
| 5. PACKAGE SIZE, PIN ASSIGNMENT..... | 8 |
| 5.1 OUTLINE DIAGRAM, PIN LAYOUT | 8 |
| 5.2 PIN ASSIGNMENT..... | 9 |
| 6. PAD LAYOUT..... | 10 |
| 7. RECOMMENDED MOUNTING CONDITIONS..... | 11 |
| 7.1 MOUNT PROHIBIT AREA..... | 11 |
| 7.2 RE-FLOW SOLDERING CONDITIONS..... | 11 |
| 7.3 SOLVENT CLEANING..... | 12 |
| 7.4 MOUNTING PRECAUTIONS..... | 12 |
| 7.5 DE-SOLDERING FROM THE PRINTED BOARD | 12 |
| 7.6 PIGTAIL ATTACHMENT..... | 12 |
| 7.7 SHIPMENT PACKING..... | 14 |
| 8. APPLICATION PRECAUTIONS..... | 15 |

1. Product Number

| Product Number | Specification | Operating Case Temperature |
|----------------|-----------------------------------------------------|----------------------------|
| OD-J8660-0A01 | SONET OC-48 SR , and ITU-T G. 957 I-16 compliant | 0 to +75 deg.C |
| OD-J8660-HA01 | | -40 to +85 deg.C |

Pigtail fiber cord is not included with the above products, it has to be separately ordered. The applicable pigtail fiber cords are listed below. Please refer to section 7.6 for connecting a pigtail cord to the above products.

| Product Number | Connector Type | Fiber Cord Length |
|-----------------|----------------|-------------------|
| OD-S524-SC-SM | SC | 51 to 55 cm |
| OD-S524-FCPC-SM | FC | |
| OD-S524-MUJ-SM | MUJ | |

2. Specifications

2.1 Absolute Maximum Ratings

| Parameter | Specification | | Unit | Note |
|------------------------------------------|---------------|------|-------|--------------------------------------------------------------------------|
| | Min | Max | | |
| Supply Voltage (Vcc) | -0.3 | +4.0 | V | |
| Storage temperature | -40 | +85 | deg.C | |
| RF Input Pins (AC-coupled, 50 ohms) | 0 | +1.2 | Vpp | Pin 11: CLK IN Pin 13: CLK INB Pin 18: DATA IN Pin 20: DATA INB |
| Input pins (Except for RF input pins) | 0 | Vcc | V | |

2.2 Environmental Conditions

| Parameter | Specification | Note |
|----------------------------|-------------------|--------------------------------------|
| Data Rate | 2.48832 Gbps | |
| Data Format | Scrambled NRZ | Scrambler is not included. |
| Transmission Cable | Single-mode fiber | SI-10/125 |
| Operating Case Temperature | 0 to +75 deg.C | OD-J8660-0A01 |
| | -40 to +85 deg.C | OD-J8660-HA01 |
| Supply Voltage | +3.3V +/-5% | |
| Power Consumption | 0.33 W (Typ) | Under condition at +25 deg.C, +3.30V |
| | 0.6 W (Max) | Under condition at +85deg.C, +3.47V |

2.3 Optical Signal Interface Specifications

| Parameter | Specification | | Unit | Note |
|------------------------------|-------------------------------|------|------|-----------------|
| | Min | Max | | |
| Average Optical Output Power | -10 | -3 | dBm | |
| Extinction Ratio | 8.2 | - | dB | |
| RMS Spectral Width | - | 4 | nm | |
| RMS Center Wavelength | 1266 | 1360 | nm | |
| Optical Output Eye Diagram | ITU-T G.957 compliant | | | Refer to fig. 1 |
| Laser Diode Classification | IEC 60825-1 Class 1 compliant | | | |
| Optical Signal Polarity | Positive logic | | | |

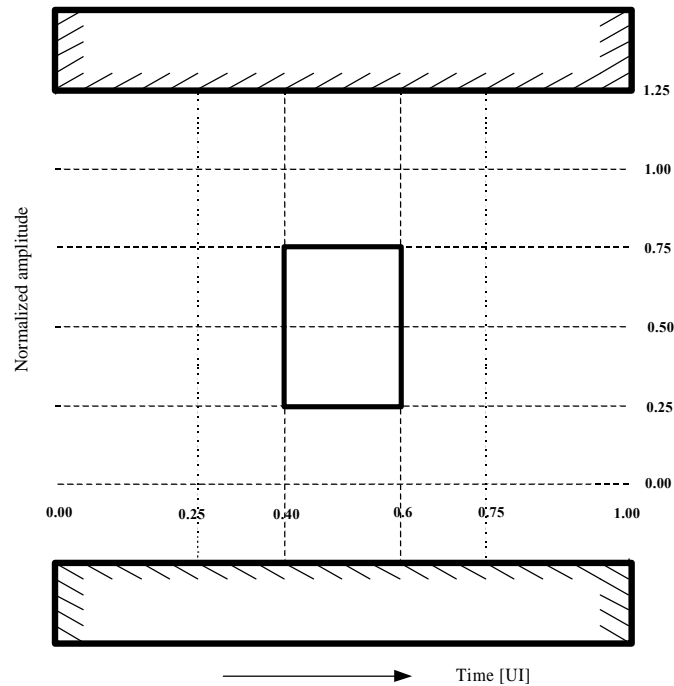


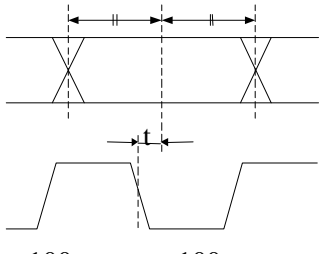


Fig. 1 Optical output signal mask specifications of SONET/ITU standard specified by the waveform after passing through 4th order Bessel-filter which has cut-off frequency of $2.48832\text{GHz} \times 0.75$.

2.4 Electrical Signal Interface Specifications

[Data and Clock Input]

| Parameter | Specification | | Unit | Note |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-----------------------------------------|
| | Min | Max | | |
| Input Signal Level | 500 | 2000 | mVpp | AC-coupled, 50 ohms, Differential input |
| | DATA IN [CLK IN]  DATA INB [CLK INB] (DATA IN) - (DATA INB), (CLK IN) - (CLK INB)  | | | |
| Data and Clock Signal |  -100 ps < t < 100 ps | | | |

[Alarm Output (OPT OUT ALM, CURR ALM)]

| Parameter | Specification | | | Unit | Note |
|--------------|---------------|------------------|-----|------|------|
| | | Min | Max | | |
| Output level | VOH | 2.4 | Vcc | V | |
| | VOL | 0 | 0.5 | V | |
| Status | 'L' | Fault condition | | | |
| | 'H' | Normal condition | | | |
| Fan-out | IOH | -0.2 | | mA | |
| | IOL | 0.2 | | mA | |

[Control input (SHUT DOWN)]

| Parameter | Specification | | | Unit | Note |
|--------------|---------------|------------------------|-----------|------|------|
| | | Min | Max | | |
| Output level | VIH | 0.7 x Vcc | Vcc | V | |
| | VIL | 0 | 0.3 x Vcc | V | |
| Status | 'L' | Optical output disable | | | |
| | 'H' | Optical output enable | | | |

[Control input (CURR ALM TST)]


| Parameter | Specification |
|-----------|--------------------------------------------------------------------------|
| Status | When CURR_ALM_TST is connected to GND, CURR ALM will be asserted to 'L'. |
| | Leave open in normal operation. |

[Performance Monitor]

| Parameter | Specification | Unit | Note |
|-----------|----------------------------------------------------|------|------------------------------------------------------------------------|
| OPT MON | 550 (max.) | mV | Voltage output. Please receive with high impedance (>1M ohms) circuit. |
| BIAS MON | 42 x Ib (Ib: Laser bias compensation current:[mA]) | mV | Voltage output. Please receive with high impedance (>1M ohms) circuit. |

3. Functional Block Diagram

3.1 Functional Block Diagram

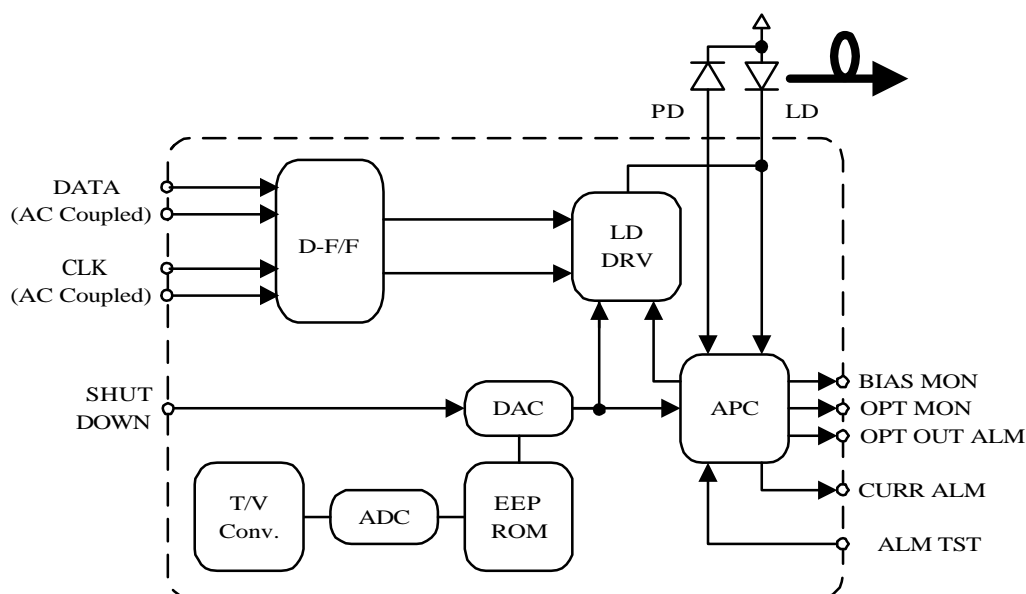

D-F/F: D flip-flop, LD DRV: Laser diode driver, DAC: Digital to analogue converter, T/V Conv.: Temperature to voltage converter, APC: Automatic power control circuit ADC: Analogue to digital converter, EEPROM: Electronic erasable ROM, PD: PIN photo diode, LD: 1.3 um Fabry-Perot laser diode

3.2 Alarm, monitor and control function

| Parameter | Symbol | Function |
|---------------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optical output power loss alarm | OPT OUT ALM | To alert loss of power condition. Alarm does not assert until power degradation exceeds 3 dB. |
| Laser degrade alarm | CURR ALM | To alert laser degradation. Alarm asserts when laser bias compensation current (Ib) increases by 25 mA +/- 5 mA from the initial value. |
| Laser shut down | SHUT DOWN * | To shutdown laser output. |
| Current alarm test | CURR ALM TST | To test CURR ALM function. When connected to GND, CURR ALM is forced to active 'L'. |
| Laser bias current monitor | BIAS MON | To monitor laser bias compensation current (Ib). The Ib is calculated from output voltage (Vo) of this terminal; $I_b = V_o / 42 \text{mA}$. Initial value is nearly 0V. |
| Optical output power monitor | OPT MON | To monitor the voltage that is proportional to optical launched power. |

* In the event of the loss of signal (data and clock), laser output status is undefined. The SHUT DOWN is required to disable the laser radiation.

4. Reliability

4.1 FIT Number


T.B.D.

4.2 Reliability Test Items and Conditions

| Item | Condition |
|-------------------------|------------------------------------------------------------------|
| Accelerated aging | +85 deg.C, +3.465 V, 5000 hours |
| Temperature cycle | -40 to +85 deg.C, 4 h/cycle, 500 cycles |
| Damp heat | +85 deg.C, 85%RH, 500 hours |
| Vibration | 10 to 55 Hz, 1.5 mm, 1 hour for x, y, z each direction |
| Mechanical shock | 50 G, 11 ms, 3 times for x, y, z each direction |
| Thermal shock | 0 and +100 deg.C in water, 5 minutes each temperature, 20 cycles |
| Low temperature storage | -40 deg.C, 2000 hours |

5. Package size, Pin Assignment

5.1 Outline diagram, Pin layout

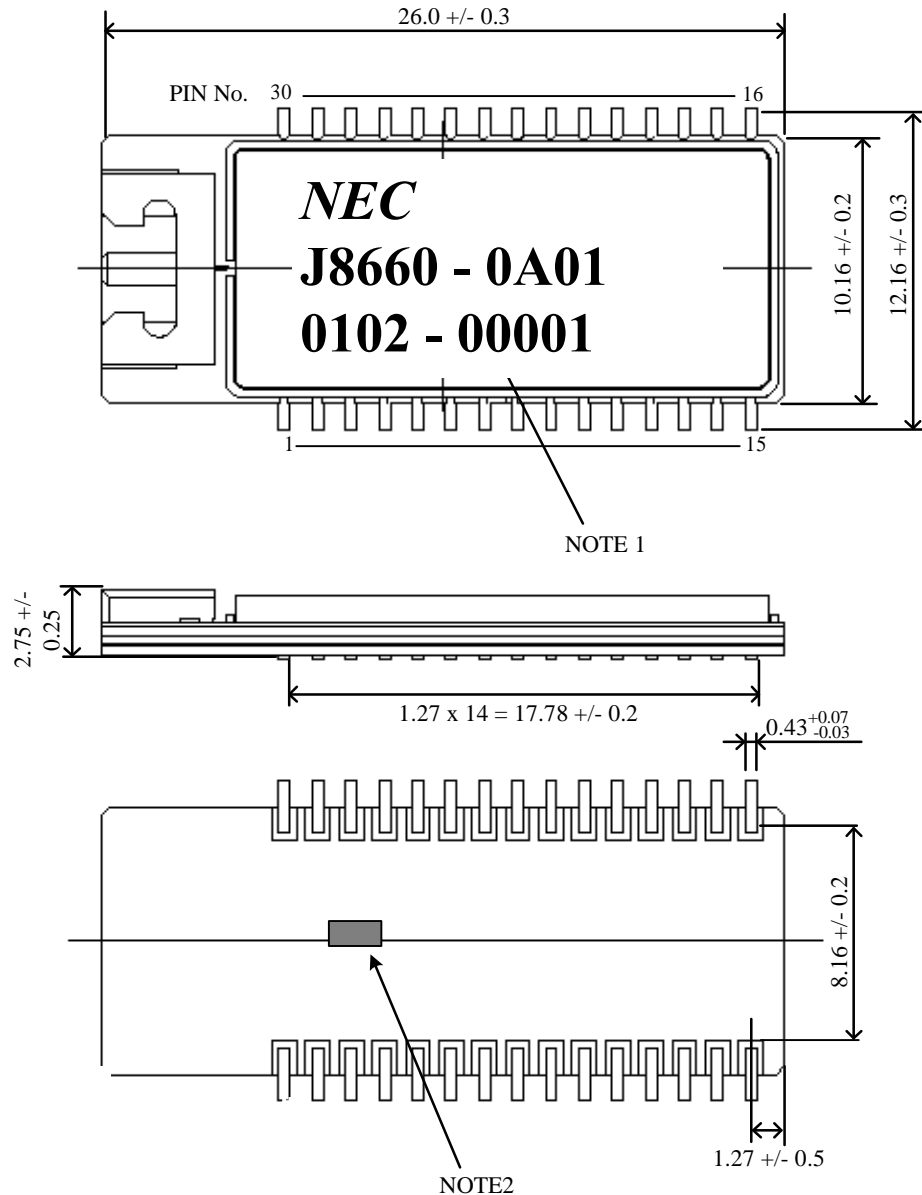

(Unit in mm)

Note1 Product name description is given below:

NEC :NEC logo mark

J8660-*A01 :Product Number

****_**** :Production year/month-serial number


Note 2 Product testing terminal : Please keep open and don't connect to any other pattern or GND.

5.2 Pin Assignment

| Pin No. | Symbol | I/O | Note |
|---------|--------------|-----|------------------------------------------|
| 1 | Vcc | I | +3.3 V |
| 2 | GND | I | |
| 3 | OPT MON | O | Optical output power monitor |
| 4 | NC | --- | (Leave open) |
| 5 | SHUT DOWN | I | Laser shutdown. Active 'L' |
| 6 | GND | I | |
| 7 | Vcc | I | + 3.3 V |
| 8 | CURR ALM | O | Laser bias current alarm |
| 9 | OPT OUT ALM | O | Laser degrade alarm |
| 10 | GND | I | |
| 11 | CLK IN | I | Clock signal input. AC coupled. |
| 12 | GND | I | |
| 13 | CLK INB | I | Inverted clock signal input. AC coupled. |
| 14 | GND | I | |
| 15 | GND | I | |
| 16 | GND | I | |
| 17 | GND | I | |
| 18 | DATA IN | I | Data signal input. AC coupled |
| 19 | GND | I | |
| 20 | DATA INB | I | Inverted data signal input. AC coupled |
| 21 | BIAS MON | O | Laser bias current monitor. |
| 22 | EXTC | --- | Connect 0.1 uF capacitor to ground. |
| 23 | CURR ALM TST | I | Current alarm test. |
| 24 | GND | I | |
| 25 | GND | I | |
| 26 | GND | I | |
| 27 | GND | I | |
| 28 | GND | I | |
| 29 | Vcc | I | +3.3 V |
| 30 | GND | I | |


I: input terminal, O: output terminal

6. Pad layout

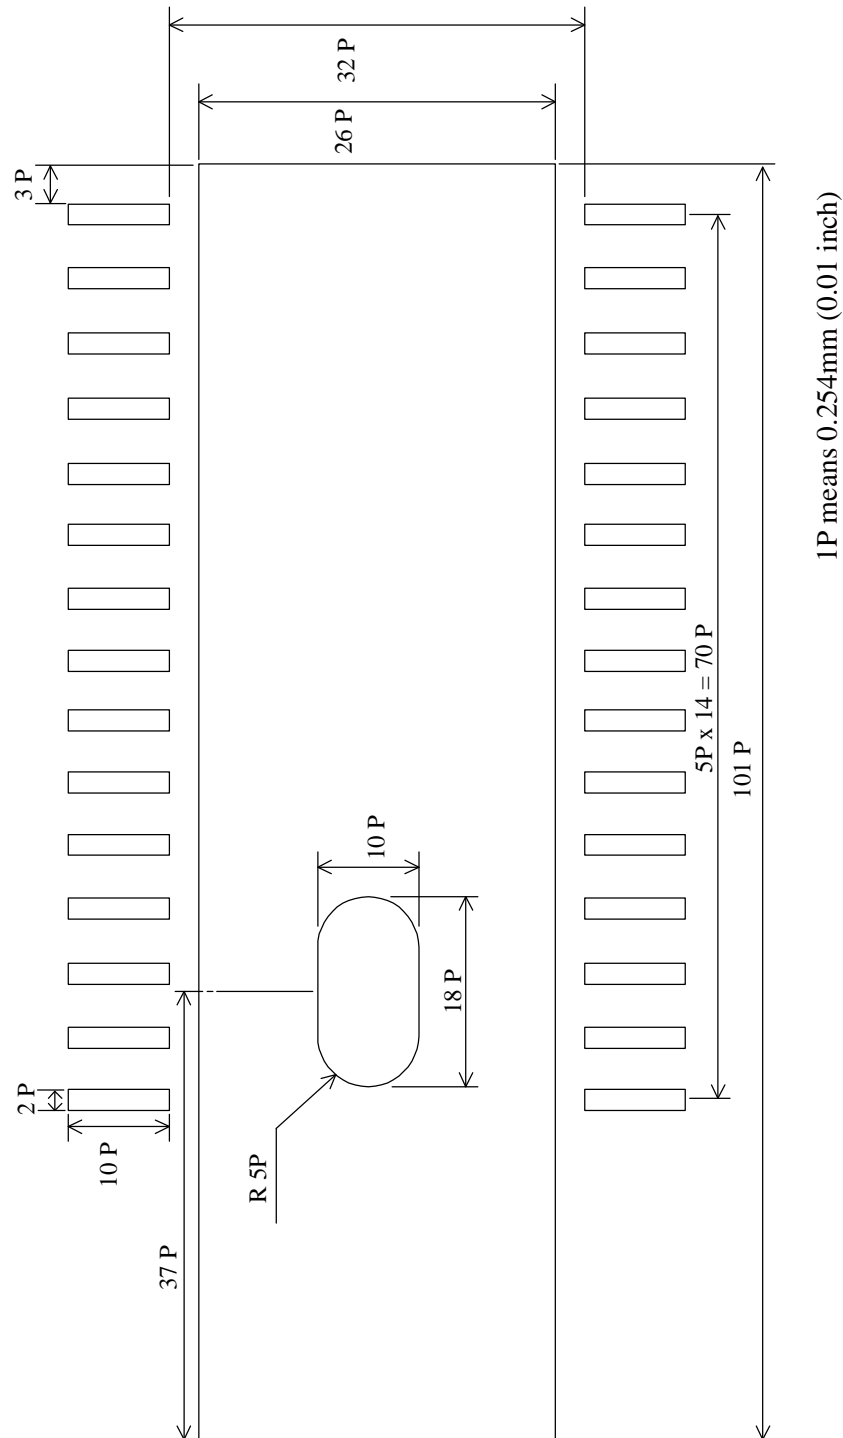

7. Recommended Mounting Conditions


7.1 Mount prohibit area

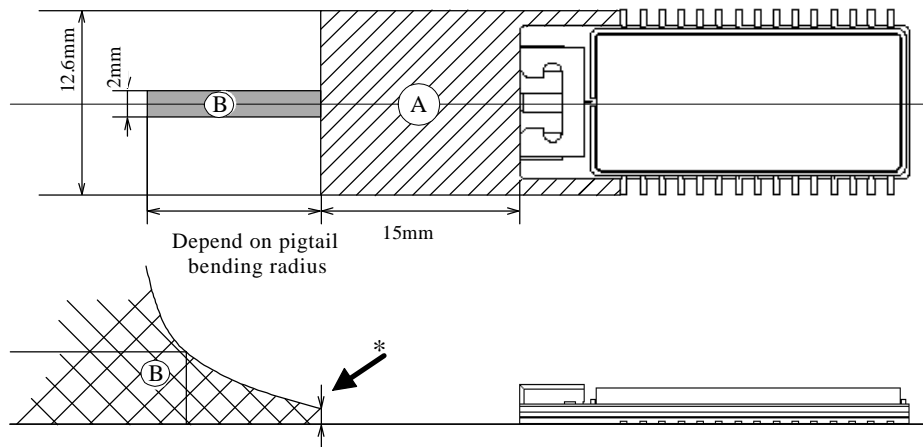

- a) 'A' is necessary space for the pigtail connection tool. Keep this area (12.6mm x 15.0mm) empty.
- b) 'B' is space for pigtail cord. Keep the bending radius of pigtail cord more than 30mm.
- c) Start bending pigtail cord after '*' point.

7.2 Re-flow Soldering Conditions

- a) Soldering temperature: At the temperature more than +200 deg.C, the time should be less than 30 sec., +230 deg.C max.
- b) Pre-heating time: That is not specified particularly (depends on PCB). Typically +150 deg.C, 30 to 60 sec.
- c) Temperature rise and falling time: less than 5 deg.C/ sec.

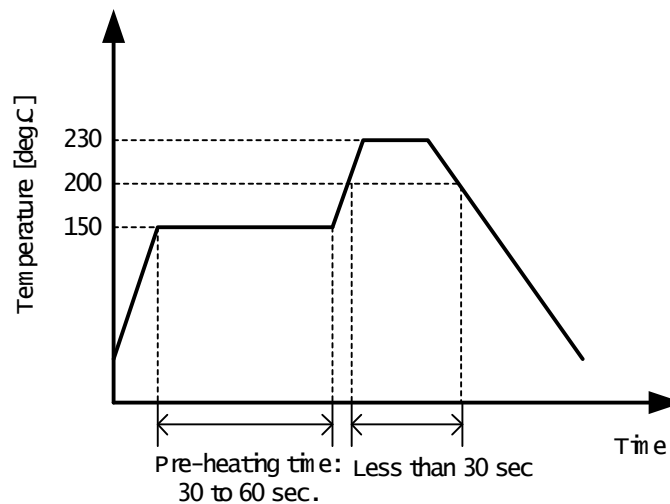


7.3 Solvent Cleaning

Solvent cleaning is not recommended.

7.4 Mounting Precautions

Do not remove safety cap over the ferrule at the time of re-flow soldering.

Please remove the safety cap after re-flow soldering.

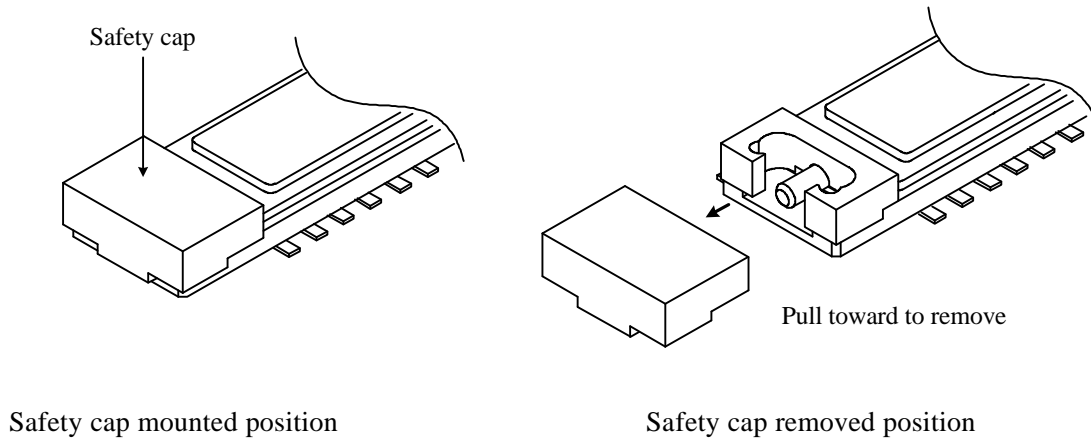

7.5 De-soldering from the Printed Board


The product performance is not guaranteed in case of de-soldering from a PCB. If it is necessary to de-solder, Please detach pigtail in advance. Pigtail can be used again.

7.6 Pigtail Attachment

Pigtail should be attached after soldering the product on PCB. Please pay attention to following points while attaching a pigtail:

- To attach pigtail use pigtail attach / detach tool specially designed for this device.
- Please refer to instruction manual of pigtail attach / detach tool for details. (Supplied separately)
- Ferrule may be broken upon applying excess strength and its characteristics may be changed.
Don't stretch or bend pigtail cord more than specified values. Recommended value for stretch is less than 200gf and bending radius should be more than 30 mm.

d) Please clean the ferrule surface by a cotton stick before attaching a pigtail.

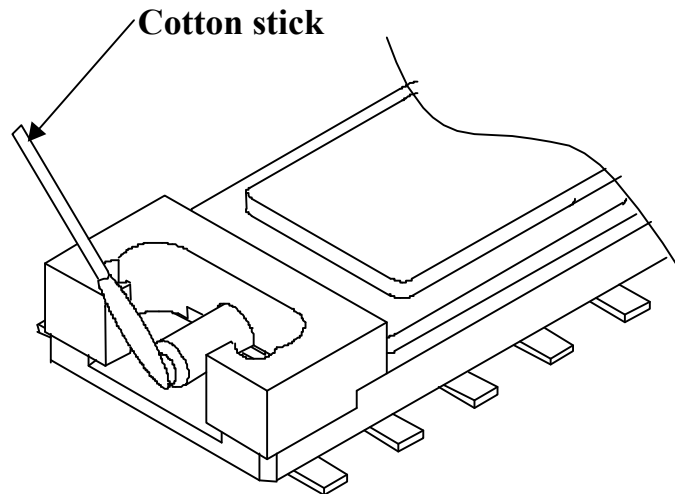


Recommended cotton stick

Maker :NTT ME

Product name :CLETOP stick type

Product Number :14100400

7.7 Shipment Packing

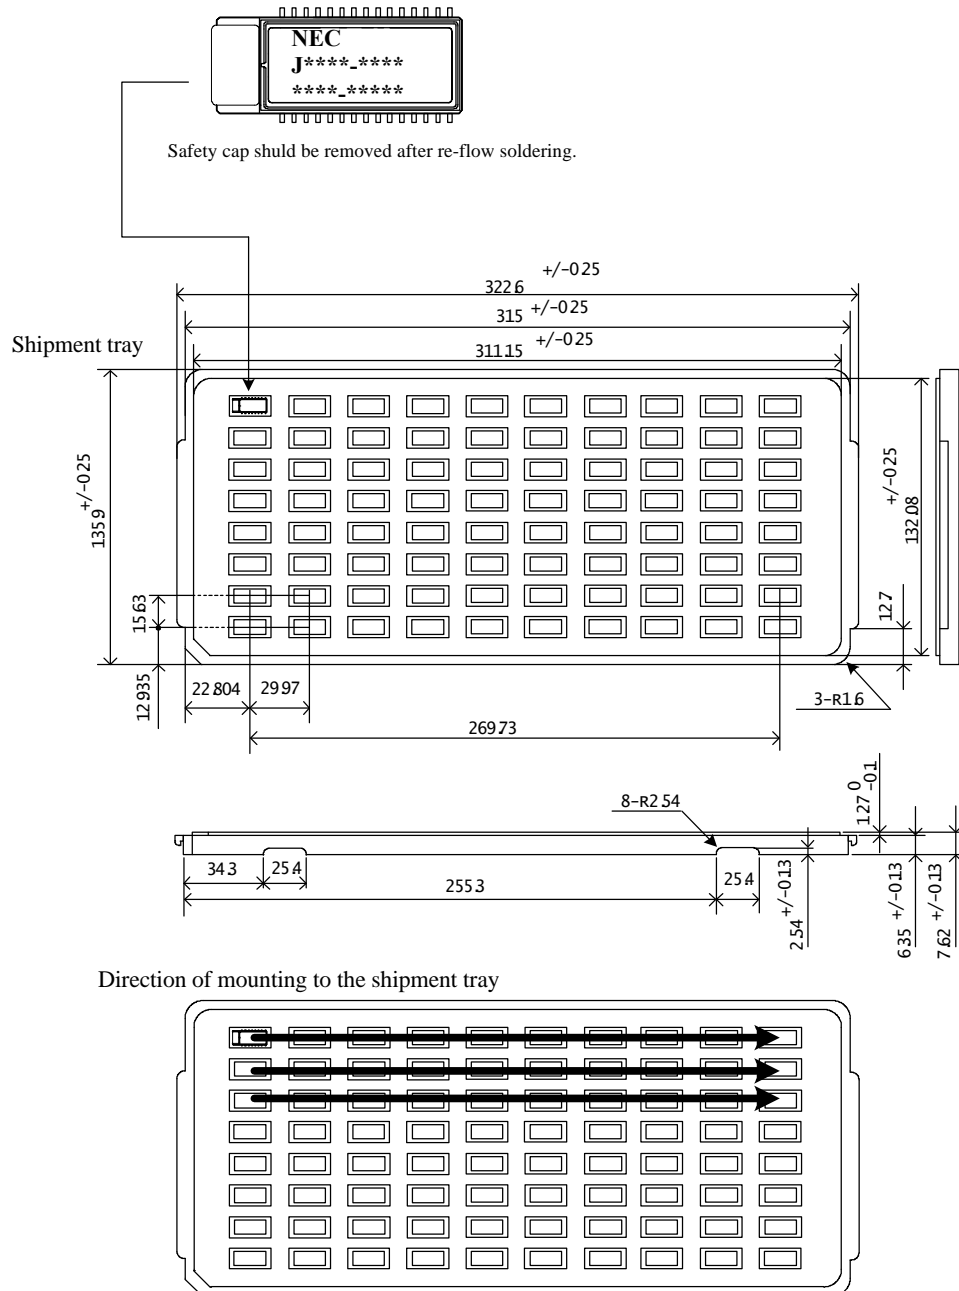

8. Application Precautions

- a) To prevent optical connector surface from crack or stain, please put the dust cap while this device is not in use. When the connector surface is stained, please wipe with a kind of lens paper.
- b) The bending radius for pigtail fiber cord should be more than 30mm.
- c) Optical components are mounted inside this device. Please handle with care. Mechanical shock due to falling could lead permanent damage.
- d) The device performance given in this manual is guaranteed for correct applications. Device performances are not guaranteed under incorrect use.
- e) Sudden heating or cooling by dryer or cooling spray could lead permanent damage to the device. The device may not work normally while sudden heating or cooling.
- f) This product should be handled as a CMOS product.