

Features

- 6.6 SPECint95, 5.5 SPECfp95 @ 266 MHz (estimated)
- Superscalar 603e core
- Integer unit (IU), floating-point unit (FPU) (user enabled or disabled), load/store unit (LSU), system register unit (SRU), and a branch processing unit (BPU).
- 16-Kbyte instruction cache
- 16-Kbyte data cache
- Lockable L1 caches-entire cache or on a per-way basis up to 3 of 4 ways.
- Dynamic power management.
- High-bandwidth bus (32/64 bits data bus) to DRAM.
- Supports 1-Mbyte to 1-Gbyte DRAM memory.
- 32-bit PCI interface operating up to 66 MHz.
- PCI 2.1-compliant, 5.0 V tolerance
- Fint MAX = 250 MHz (tbc).
- FBus MAX = 66 MHz (tbc)

Description

The PC8240 combines a PowerPC™ 603e core microprocessor with a PCI bridge. The PC8240's PCI support will allow system designers to rapidly design systems using peripherals already designed for PCI and the other standard interfaces. The PC8240 also integrates a high-performance memory controller which supports various types of DRAM and ROM. The PC8240 is the first of a family of products that provide system level support for industry standard interfaces with a PowerPC microprocessor core.

The peripheral logic integrates a PCI bridge, memory controller, DMA controller, EPIC interrupt controller, I²O controller, and an I²C controller. The 603e core is a full-featured, high-performance processor with floating-point support, memory management, 16-Kbyte instruction cache, 16-Kbyte data cache, and power management features. The integration reduces the overall packaging requirements and the number of discrete devices required for an embedded system.


The PC8240 contains an internal peripheral logic bus that interfaces the 603e core to the peripheral logic. The core can operate at a variety of frequencies, allowing the designer to trade off performance for power consumption. The 603e core is clocked from a separate PLL, which is referenced to the peripheral logic PLL. This allows the microprocessor and the peripheral logic block to operate at different frequencies, while maintaining a synchronous bus interface. The interface uses a 64- or 32-bit data bus (depending on memory data bus width) and a 32-bit address bus along with control signals that enable the interface between the processor and peripheral logic to be optimized for performance. PCI accesses to the PC8240's memory space are passed to the processor bus for snooping purposes when snoop mode is enabled.

The PC8240's features serve a variety of embedded applications. In this way, the 603e core and peripheral logic remain general-purpose. The PC8240 can be used as either a PCI host or an agent controller.

SCREENING/QUALITY/PACKAGING

This product is manufactured in full compliance with :

- Upscreening based upon TCS standards.
- Full military temperature range
(T_c = 55°C, T_c = +125°C)
- Industrial temperature range
(T_c = -40°C, T_c = +110°C)
- Core power supply :
 - . 2.5 +/- 5 % V (L-Spec for 200 MHz)
 - . 2.50 V to 2.75 V (R-Spec for 250 MHz) (tbc)
- I/O power supply : 3.0 to 3.6 V
- 352 Tape Ball Grid Array (TBGA).

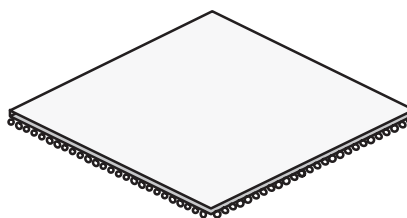

TP suffix

TBGA352

Tape Ball Grid Array



PC8240

Integrated Processor Family

Preliminary specification alpha SITE

July 2000



SUMMARY

A. GENERAL DESCRIPTION	3
1. BLOCK DIAGRAM	3
2. PINOUT LISTINGS	4
B. DETAILED SPECIFICATIONS	9
1. SCOPE	9
2. APPLICABLE DOCUMENTS	9
3. REQUIREMENTS	9
3.1. General	9
3.2. Design and construction	9
3.2.1. Terminal connections	9
3.3. Absolute maximum ratings	9
3.4. Recommended Operating Conditions	10
3.5. Thermal information	12
3.5.1. Thermal characteristics	12
3.5.2. Thermal Management Information	12
3.5.3. Internal Package Conduction Resistance	14
3.5.4. Heat Sink Selection Example	16
3.6. Power consideration	17
3.7. Marking	18
4. ELECTRICAL CHARACTERISTICS	18
4.1. Static characteristics	18
4.2. Dynamic Electrical Characteristics	20
4.2.1. Clock AC Specifications	21
4.2.2. Input AC Timing Specifications	23
4.2.3. Output AC Timing Specification	25
4.2.4. I2C AC Timing Specifications	28
4.2.5. EPIC Serial Interrupt Mode AC Timing Specifications	31
4.2.6. IEEE 1149.1 (JTAG) AC Timing Specifications	32
5. PREPARATION FOR DELIVERY	34
5.1. Packaging	34
5.2. Certificate of compliance	34
6. HANDLING	35
6.1. Package description	35
6.1.1. Package Parameters for the PC8240	35
6.1.2. Pin Assignments and Package Dimensions	36
6.2. PLL Configuration	37
6.3. System Design Information	38
6.3.1. PLL Power Supply Filtering	38
6.3.2. Power Supply Voltage Sequencing	39
6.3.3. Power Supply Sizing	39
6.3.4. Decoupling Recommendations	39
6.3.5. Connection Recommendations	39
6.3.6. Pull-up/Pull-down Resistor Requirements	40
6.3.7. JTAG Configuration Signals	40
7. DEFINITIONS	42
8. DIFFERENCES WITH COMMERCIAL PART	42
9. ORDERING INFORMATION	43

A. GENERAL DESCRIPTION

1. BLOCK DIAGRAM

The PC8240 integrated processor is comprised of a peripheral logic block and a 32-bit superscalar PowerPC 603e core, as shown in Figure 1.

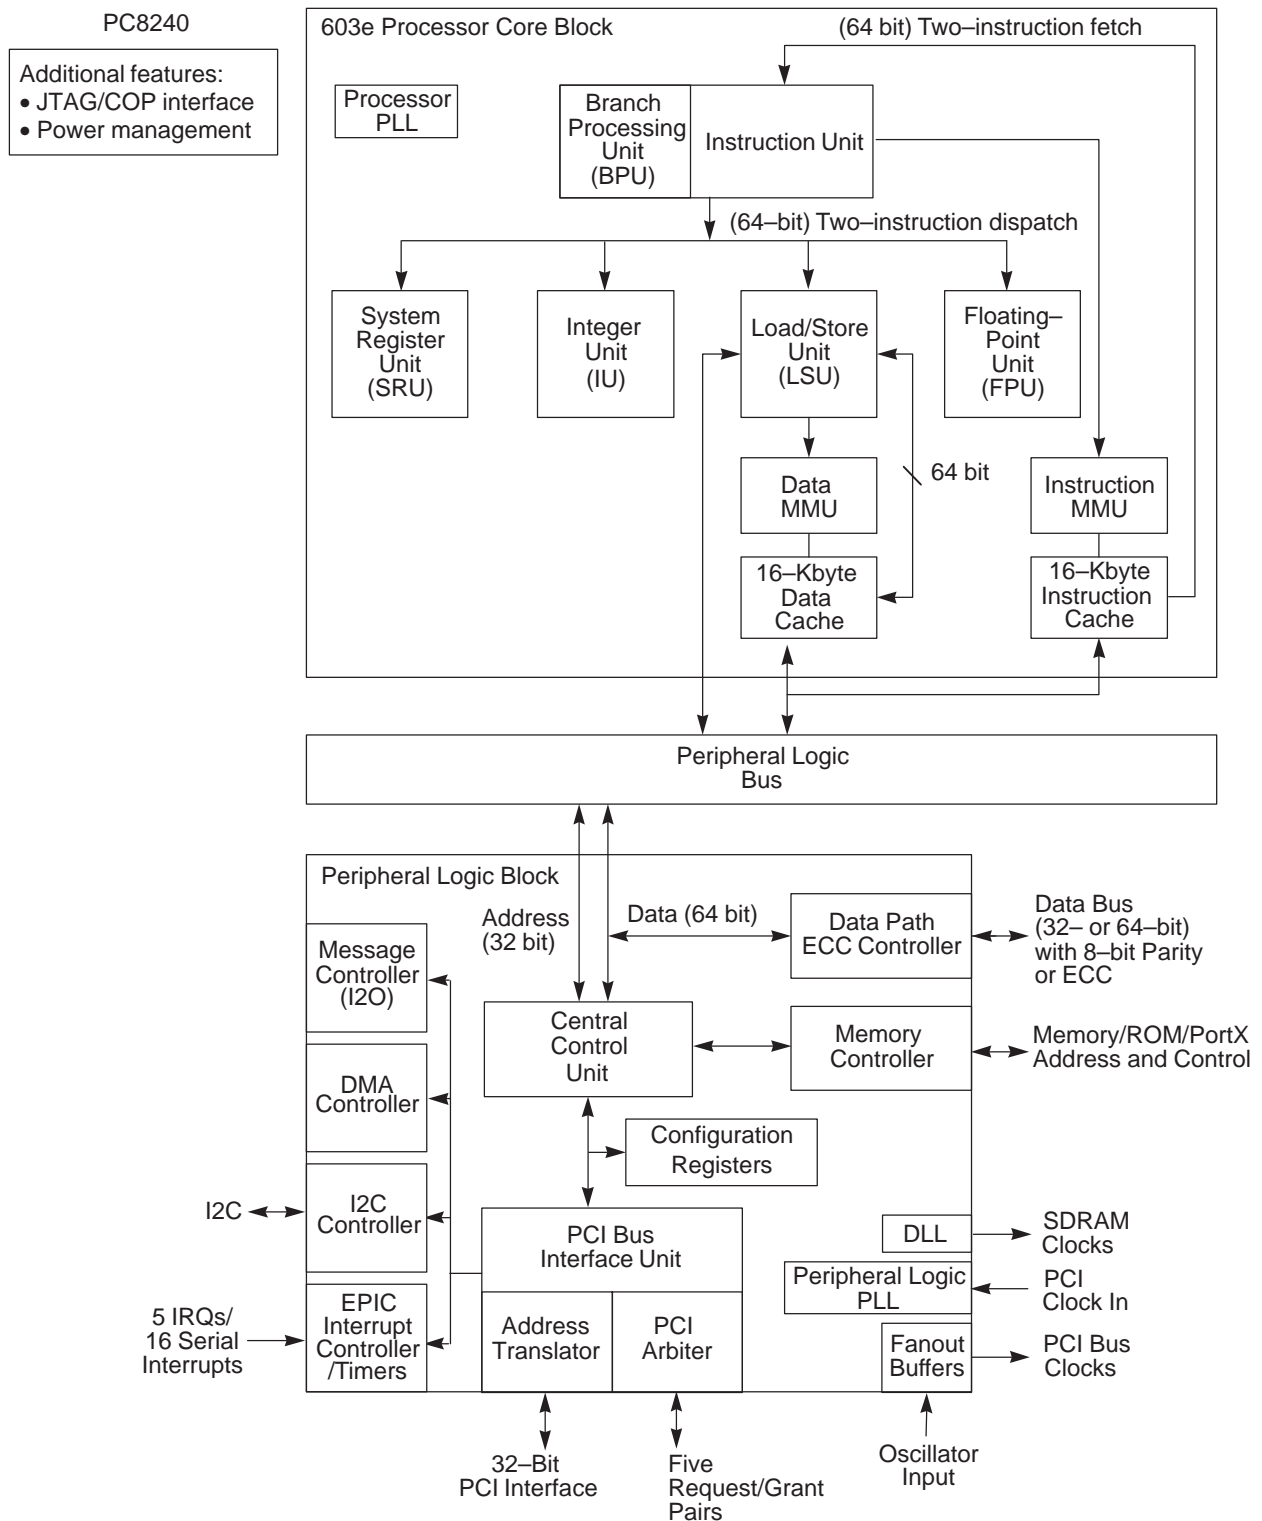


Figure 1: Block Diagram

2. PINOUT LISTINGS

Table 1 provides the pinout listing for the PC8240, 352 TBGA package.

Table 1. PC8240 Pinout Listing

Signal Name	Package Pin Number	Pin Type	Power Supply	Output Driver Type	Notes
PCI Interface Signals					
$\overline{C/BE}[0-3]$	A25 F23 K23 P25	I/O	OVdd	DRV_PCI	6,15
\overline{DEVSEL}	H26	I/O	OVdd	DRV_PCI	8,15
FRAME	J24	I/O	OVdd	DRV_PCI	8,15
\overline{IRDY}	K25	I/O	OVdd	DRV_PCI	8,15
\overline{LOCK}	J26	Input	OVdd	—	8
AD[0-31]	C22 D22 B22 B23 D19 B24 A24 B26 A26 C26 D25 D26 E23 E25 E26 F24 L26 L25 M25 M26 N23 N25 N26 R26 R25 T26 T25 U23 U24 U26 U25 V25	I/O	OVdd	DRV_PCI	6,15
PAR	G25	I/O	OVdd	DRV_PCI	15
$\overline{GNT}[0-3]$	V26 W23 W24 W25	Output	OVdd	DRV_PCI	6,15
$\overline{GNT4/DA5}$	W26	Output	OVdd	DRV_PCI	7,15
$\overline{REQ}[0-3]$	AB26 AA25 AA26 Y25	Input	OVdd	—	6,12
$\overline{REQ4/DA4}$	Y26	Input	OVdd	—	12
\overline{PERR}	G26	I/O	OVdd	DRV_PCI	8,15,18
\overline{SERR}	F26	I/O	OVdd	DRV_PCI	8,15,16
\overline{STOP}	H25	I/O	OVdd	DRV_PCI	8,15
\overline{TRDY}	K26	I/O	OVdd	DRV_PCI	8,15
\overline{INTA}	AC26	Output	OVdd	DRV_PCI	15,16
IDSEL	P26	Input	OVdd	—	—
Memory Interface Signals					
MDL[0-31]	AD17 AE17 AE15 AF15 AC14 AE13 AF13 AF12 AF11 AF10 AF9 AD8 AF8 AF7 AF6 AE5 B1 A1 A3 A4 A5 A6 A7 D7 A8 B8 A10 D10 A12 B11 B12 A14	I/O	Gvdd	DRV_MEM_DATA	5,6,13
MDH[0-31]	AC17 AF16 AE16 AE14 AF14 AC13 AE12 AE11 AE10 AE9 AE8 AC7 AE7 AE6 AF5 AC5 E4 A2 B3 D4 B4 B5 D6 C6 B7 C9 A9 B10 A11 A13 B13 A15	I/O	Gvdd	DRV_MEM_DATA	6,13

Signal Name	Package Pin Number	Pin Type	Power Supply	Output Driver Type	Notes
CAS/DQM[0–7]	AB1 AB2 K3 K2 AC1 AC2 K1 J1	Output	Gvdd	DRV_MEM_ADDR	6
RAS/CS[0–7]	Y4 AA3 AA4 AC4 M2 L2 M1 L1	Output	Gvdd	DRV_MEM_ADDR	6
FOE	H1	I/O	Gvdd	DRV_MEM_ADDR	3,4
RCS0	N4	I/O	Gvdd	DRV_MEM_ADDR	3,4
RCS1	N2	Output	Gvdd	DRV_MEM_ADDR	
SDMA[11 – 0]	N1 R1 R2 T1 T2 U4 U2 U1 V1 V3 W1 W2	Output	Gvdd	DRV_MEM_ADDR	6,14
SDMA12/SDBA1	P1	Output	Gvdd	DRV_MEM_ADDR	14
SDBA0	P2	Output	Gvdd	DRV_MEM_ADDR	—
PAR[0–7]	AF3 AE3 G4 E2 AE4 AF4 D2 C2	I/O	Gvdd	DRV_MEM_DATA	6,13,14
SDRAS	AD1	Output	Gvdd	DRV_MEM_ADDR	3
SDCAS	AD2	Output	Gvdd	DRV_MEM_ADDR	3
CKE	H2	Output	Gvdd	DRV_MEM_ADDR	3,4
WE	AA1	Output	Gvdd	DRV_MEM_ADDR	—
AS	Y1	Output	Gvdd	DRV_MEM_ADDR	3,4
EPIC Control Signals					
IRQ_0 / S_INT	C19	Input	Ovdd	—	—
IRQ_1 / S_CLK	B21	I/O	Ovdd	DRV_PCI	—
IRQ_2 / S_RST	AC22	I/O	Ovdd	DRV_PCI	—
IRQ_3 / S_FRAME	AE24	I/O	Ovdd	DRV_PCI	—
IRQ_4 / L_INT	A23	I/O	Ovdd	DRV_PCI	—
I²C Control Signals					
SDA	AE20	I/O	Ovdd	DRV_STD	10,16
SCL	AF21	I/O	Ovdd	DRV_STD	10,16
Clock Out Signals					
PCI_CLK [0–3]	AC25 AB25 AE26 AF25	Output	GVdd	DRV_PCI_CLK	6
PCI_CLK4/DA3	AF26	Output	GVdd	DRV_PCI_CLK	—
PCI_SYNC_OUT	AD25	Output	GVdd	DRV_PCI_CLK	—
PCI_SYNC_IN	AB23	Input	GVdd	—	—
SDRAM_CLK [0–3]	D1 G1 G2 E1	Output	GVdd	DRV_MEM_ADDR	6

Signal Name	Package Pin Number	Pin Type	Power Supply	Output Driver Type	Notes
SDRAM_SYNC_OUT	C1	Output	GVdd	DRV_MEM_ADDR	—
SDRAM_SYNC_IN	H3	Input	GVdd	—	—
CKO/DA1	B15	Output	Ovdd	DRV_STD	—
OSC_IN	AD21	Input	Ovdd	—	—
Miscellaneous Signals					
HRST_CTRL	A20	Input	OVdd	—	—
HRST_CPU	A19	Input	OVdd	—	—
MCP	A17	Output	OVdd	DRV_STD	3,4,17
NMI	D16	Input	OVdd	—	—
SMI	A18	Input	OVdd	—	10
SRESET	B16	Input	OVdd	—	10
TBEN	B14	Input	OVdd	—	10
QACK/DA0	F2	Output	OVdd	DRV_STD	3,4
CHKSTOP_IN	D14	Input	OVdd	—	10
MAA[0–2]	AF2 AF1 AE1	Output	GVdd	DRV_MEM_DATA	3,4,6
MIV	A16	Output	OVdd	DRV_STD	—
PMAA[0–2]	AD18 AF18 AE19	Output	OVdd	DRV_STD	3,4,6,15
Test/Configuration Signals					
PLL_CFG[0–4]/ DA[10–6]	A22 B19 A21 B18 B17	Input	OVdd	—	4,6
TEST[0–1]	AD22 B20	Input	OVdd	—	1,6,9
TEST2	Y2	Input	GVdd	—	11
TEST3	AF20	Input	OVdd	—	10
TEST4	AC18	I/O	OVdd	DRV_STD	10
TCK	AF22	Input	OVdd	—	9,12
TDI	AF23	Input	OVdd	—	9,12
TDO	AC21	Output	OVdd	DRV_PCI	—
TMS	AE22	Input	OVdd	—	9,12
TRST	AE23	Input	OVdd	—	9,12

Signal Name	Package Pin Number	Pin Type	Power Supply	Output Driver Type	Notes
Power and Ground Signals					
GND	AA2 AA23 AC12 AC15 AC24 AC3 AC6 AC9 AD11 AD14 AD16 AD19 AD23 AD4 AE18 AE2 AE21 AE25 B2 B25 B6 B9 C11 C13 C16 C23 C4 C8 D12 D15 D18 D21 D24 D3 F25 F4 H24 J25 J4 L24 L3 M23 M4 N24 P3 R23 R4 T24 T3 V2 V23 W3	Ground 52 terminals	—	—	—
LVdd	AC20 AC23 D20 D23 G23 P23 Y23	Reference voltage 3.3v,5.0v	LVdd	—	—
GVdd	AB3 AB4 AC10 AC11 AC8 AD10 AD13 AD15 AD3 AD5 AD7 C10 C12 C3 C5 C7 D13 D5 D9 E3 G3 H4 K4 L4 N3 P4 R3 U3 V4 Y3	Power for Memory Drivers 2.5v,3.3v	GVdd	—	—
Ovdd	AB24 AD20 AD24 C14 C20 C24 E24 G24 J23 K24 M24 P24 T23 Y24	PCI / Stnd 3.3v	Ovdd	—	—
Vdd	AA24 AC16 AC19 AD12 AD6 AD9 C15 C18 C21 D11 D8 F3 H23 J3 L23 M3 R24 T4 V24 W4	Power for Core 2.5v	Vdd	—	—
LAVdd	D17	Power for DLL 2.5v	LAVdd	—	—
AVdd	C17	Power for PLL (CPU Core Logic) 2.5v	AVdd	—	—
AVdd2	AF24	Power for PLL (Peripheral Logic) 2.5v	AVdd2	—	—
Manufacturing Pins					
DA2	C25	I/O	OVdd	DRV_PCI	2
DA[11–13]	AD26 AF17 AF19	I/O	OVdd	DRV_PCI	2,6
DA[14–15]	F1 J2	I/O	GVdd	DRV_MEM_ADDR	2,6

Notes :

- 1 Place pull-up resistors of 120 Ohms or less on the TEST[0–1] pins.
- 2 Treat these pins as No Connects unless using debug address functionality.
- 3 This pin has an internal pull-up resistor which is enabled only when the PC8240 is in the reset state. The value of the internal pull-up resistor is not guaranteed, but is sufficient to insure that a '1' is read into configuration bits during reset.
- 4 This pin is a reset configuration pin.

- 5 DL[0] is a reset configuration pin and has an internal pull-up resistor which is enabled only when the PC8240 is in the reset state. The value of the internal pull-up resistor is not guaranteed, but is sufficient to insure that a '1' is read into configuration bits during reset.
- 6 Multi-pin signals such as AD[0–31] or DL[0–31] have their physical package pin numbers listed in order corresponding to the signal names. Ex: AD0 is on pin C22, AD1 is on pin D22,... AD31 is on pin V25.
- 7 $\overline{\text{GNT4}}$ is a reset configuration pin and has an internal pull-up resistor which is enabled only when the PC8240 is in the reset state. The value of the internal pull-up resistor is not guaranteed, but is sufficient to insure that a '1' is read into configuration bits during reset.
- 8 Recommend a weak pull-up resistor (2K – 10K Ohm) be placed on this PCI control pin to LVdd.
- 9 V_{IH} and V_{IL} for these signals are the same as the PCI V_{IH} and V_{IL} entries in Table “. DC Electrical Specifications”.
- 10 Recommend a weak pull-up resistor (2K – 10K Ohm) be placed on this pin to OVdd.
- 11 Recommend a weak pull-up resistor (2K – 10K Ohm) be placed on this pin to GVdd.
- 12 This pin has an internal pull-up resistor; the value of the internal pull-up resistor is not guaranteed, but is sufficient to prevent unused inputs from floating.
- 13 Output Valid specifications for this pin are memory interface mode dependent (Registered or Flow-through), see Table “. Output AC Timing Specifications”.
- 14 Non-DRAM Access Output Valid specification applies to this pin during non-DRAM accesses, see specification 12b3 in Table “Output AC Timing Specifications”.
- 15 This pin is affected by programmable PCI_HOLD_DEL parameter, see Section AUCUN LIEN “PCI Signal Output Hold Timing”.
- 16 This pin is an open drain signal.
- 17 This pin can be programmed to be driven (default) or can be programmed to be open drain; see PMCR2 register description in the MOTOROLA PC8240 User's Manual for details.
- 18 This pin is a Sustained Tri-State pin as defined by the *PCI Local Bus Specification*.

B. DETAILED SPECIFICATIONS

1. SCOPE

This drawing describes the specific requirements for the PC8240 processor, in compliance with TCS standard screening.

2. APPLICABLE DOCUMENTS

- 1) MIL-STD-883 : Test methods and procedures for electronics.
- 2) MIL-PRF-38535 : General specifications for microcircuits.

3. REQUIREMENTS

3.1. General

The microcircuits are in accordance with the applicable documents and as specified herein.

3.2. Design and construction

3.2.1. Terminal connections

The terminal connections are shown Table 1 (§ A. GENERAL DESCRIPTION).

3.3. Absolute maximum ratings

Absolute maximum ratings are stress rating only and functional operation at the maximum is not guaranteed. Stresses beyond those listed may affect device reliability or cause permanent damage to the device.

Table 2. Absolute maximum rating for the PC8240

Characteristic ¹	Symbol	Range	Unit
Supply Voltage - CPU Core and Peripheral Logic	V _{dd}	-0.3 to 2.75	V
Supply Voltage - Memory Bus Drivers	GV _{dd}	-0.3 to 3.6	V
Supply Voltage - PCI and Standard I/O Buffers	OV _{dd}	-0.3 to 3.6	V
Supply Voltage - PLLs and DLL	AV _{dd} /AV _{dd} 2/LAV _{dd}	-0.3 to 2.75	V
Supply Voltage - PCI Reference	V _{IN}	-0.3 to 3.6	V
Input Voltage ²	LV _{dd}	-0.3 to 5.4	V
Storage Temperature Range	T _{STG}	-55 to 150	C

Notes:

- 1 Functional and tested operating conditions are given in Table 2. Absolute maximum ratings are stress ratings only, and functional operation at the maximums is not guaranteed. Stresses beyond those listed may affect device reliability or cause permanent damage of the device.
- 2 PCI inputs with LV_{dd} = 5 V 5 % V DC may be correspondingly stressed at voltages exceeding LV_{dd} + 0.5 V DC.

3.4. Recommended Operating Conditions

Table 3. Recommended Operating Conditions


Characteristic ¹		Symbol	Recommended Value	Unit	Notes
Supply Voltage		V _{dd}	2.5 ± 5 %	V	4,6
I/O Buffer supply for PCI and Standard		OV _{dd}	3.3 ± 0.3	V	6
Supply Voltages for Memory Bus Drivers		GV _{dd}	3.3 ± 5 %	V	8
			2.5 ± 5 %	V	8
PLL Supply Voltage - CPU Core Logic		AV _{dd}	2.5 ± 5 %	V	4,6
PLL Supply Voltage - Peripheral Logic		AV _{dd} 2	2.5 ± 5 %	V	4,7
DLL Supply Voltage		LAV _{dd}	2.5 ± 5 %	V	4,7
PCI Reference		LV _{dd}	5.0 ± 5 %	V	9,10
			3.3 ± 0.3	V	9,10
Input Voltage	PCI Inputs	V _{IN}	0 to 3.6 or 5.75	V	2,3
	All Other Inputs		0 to 3.6	V	5
Operating Temperature		T _C	-55 to +125	C	

Note :

- These are the recommended and tested operating conditions. Proper device operation outside of these conditions is not guaranteed.
- PCI pins are designed to withstand LV_{dd} + 0.5 V dc when LV_{dd} is connected to a 5.0V dc power supply.
- PCI pins are designed to withstand LV_{dd} + 0.5 V dc when LV_{dd} is connected to a 3.3 V dc power supply.
- Voltage specification is 2.50 V to 2.70 V for R-Spec (250 MHz)

Cautions:

- Input voltage (V_{IN}) must not be greater than the supply voltage (V_{dd}/AV_{dd}/AV_{dd}2/LAV_{dd}) by more than 2.5 V at all times including during power-on reset.
- OV_{dd} must not exceed V_{dd}/AV_{dd}/AV_{dd}2/LAV_{dd} by more than 1.8 V at any time including during power-on reset.
- V_{dd}/AV_{dd}/AV_{dd}2/LAV_{dd} must not exceed OV_{dd} by more than 0.6 V at any time including during power-on reset.
- GV_{dd} must not exceed V_{dd}/AV_{dd}/AV_{dd}2/LAV_{dd} by more than 1.8 V at any time including during power-on reset.
- LV_{dd} must not exceed V_{dd}/AV_{dd}/AV_{dd}2/LAV_{dd} by more than 5.4 V at any time including during power-on reset.
- LV_{dd} must not exceed OV_{dd} by more than 3.6 V at any time including during power-on reset.

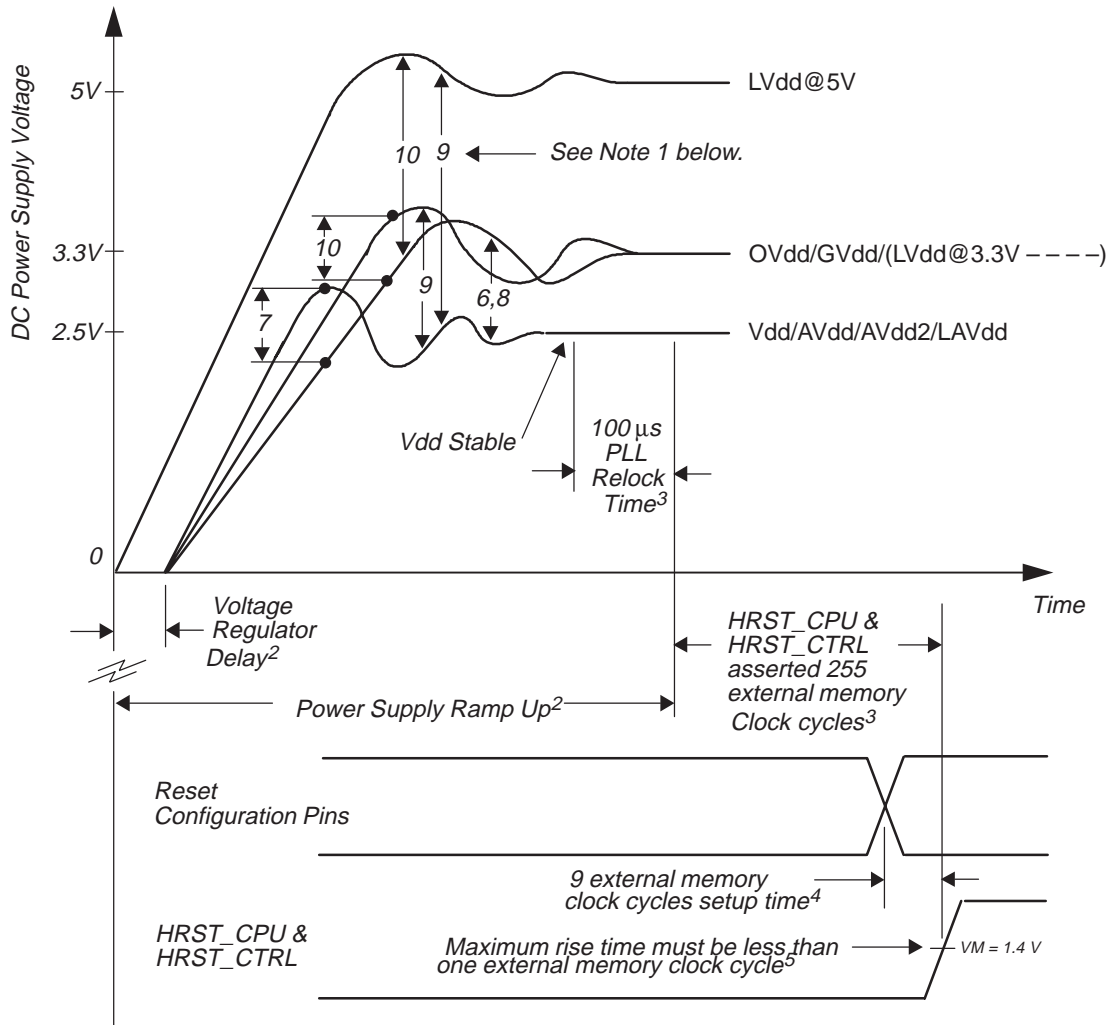

Note :

- 1 Numbers associated with waveform separations correspond to caution numbers listed in Table 3 "Recommended Operating Conditions".
- 2 Refer to Paragraph "Power Supply Voltage Sequencing" (see summary) for additional information on this topic.
- 3 Refer to Table 9 for additional information on PLL Relock and reset signal assertion timing requirements.
- 4 Refer to Table 10 for additional information on reset configuration pin setup timing requirements.
- 5 HRST_CPU/HRST_CTRL must transition from a logic 0 to a logic 1 in less than one SDRAM_SYNC_IN clock cycle for the device to be in the non-reset state.

Figure 2: Supply Voltage Sequencing and Separation Cautions

Figure 3 shows the overshoot and undershoot voltage of the memory interface of the PC8240.

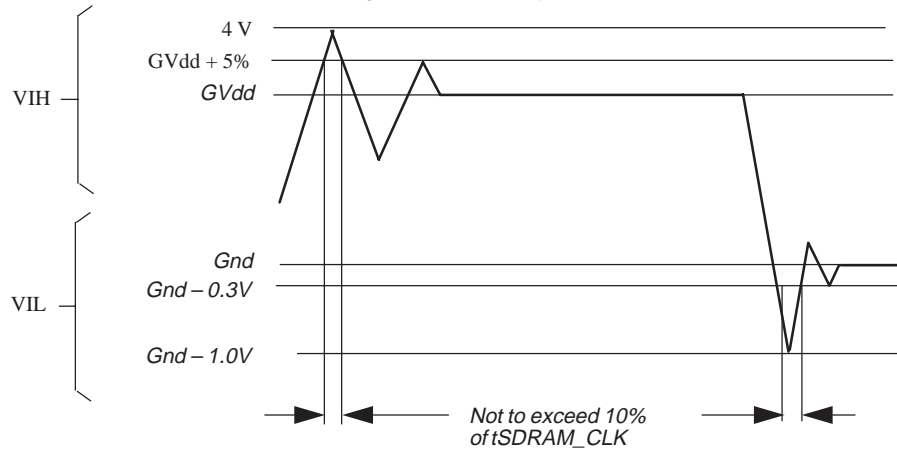


Figure 3: Overshoot/Undershoot Voltage

3.5. Thermal information

3.5.1. Thermal characteristics

Table 4 provides the package thermal characteristics for the PC8240.

Table 4. Package Thermal Characteristics

Characteristics	Symbols	Min	Units
Die Junction-to-Case Thermal Resistance	θ_{JC}	1.8	C/W
Die Junction-to-Board Thermal Resistance	θ_{JB}	4.8	C/W

3.5.2. Thermal Management Information

This section provides thermal management information for the tape ball grid array (TBGA) package for air-cooled applications. Proper thermal control design is primarily dependent upon the system-level design-the heat sink, airflow and thermal interface material. To reduce the die-junction temperature, heat sinks may be attached to the package by several methods-adhesive, spring clip to holes in the printed-circuit board or package, and mounting clip and screw assembly; see Figure 4.

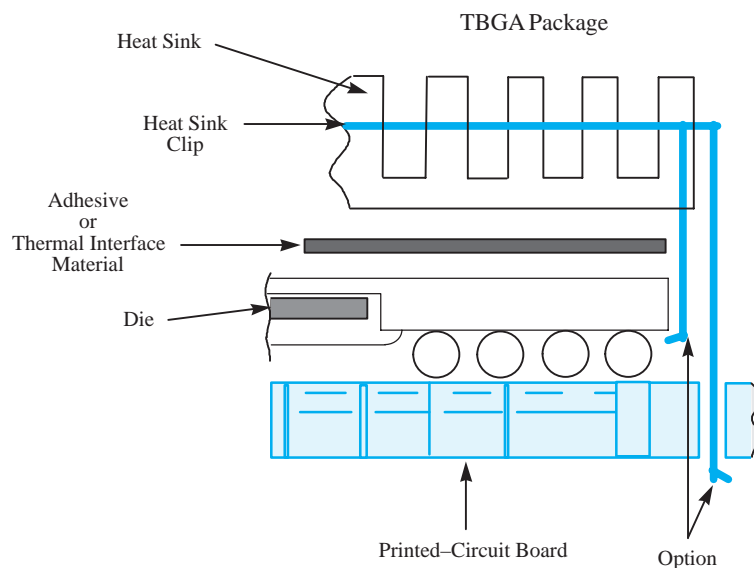


Figure 4: Package Exploded Cross-Sectional View with Several Heat Sink Options

Figure 5 depicts the die junction-to-ambient thermal resistance for four typical cases:

- 1 A heat sink is not attached to the TBGA package and there exists high board-level thermal loading of adjacent components.
- 2 A heat sink is not attached to the TBGA package and there exists low board-level thermal loading of adjacent components.
- 3 A heat sink (e.g. ChipCoolers #HTS255-P) is attached to the TBGA package and there exists high board-level thermal loading of adjacent components.
- 4 A heat sink (e.g. ChipCoolers #HTS255-P) is attached to the TBGA package and there exists low board-level thermal loading of adjacent components.

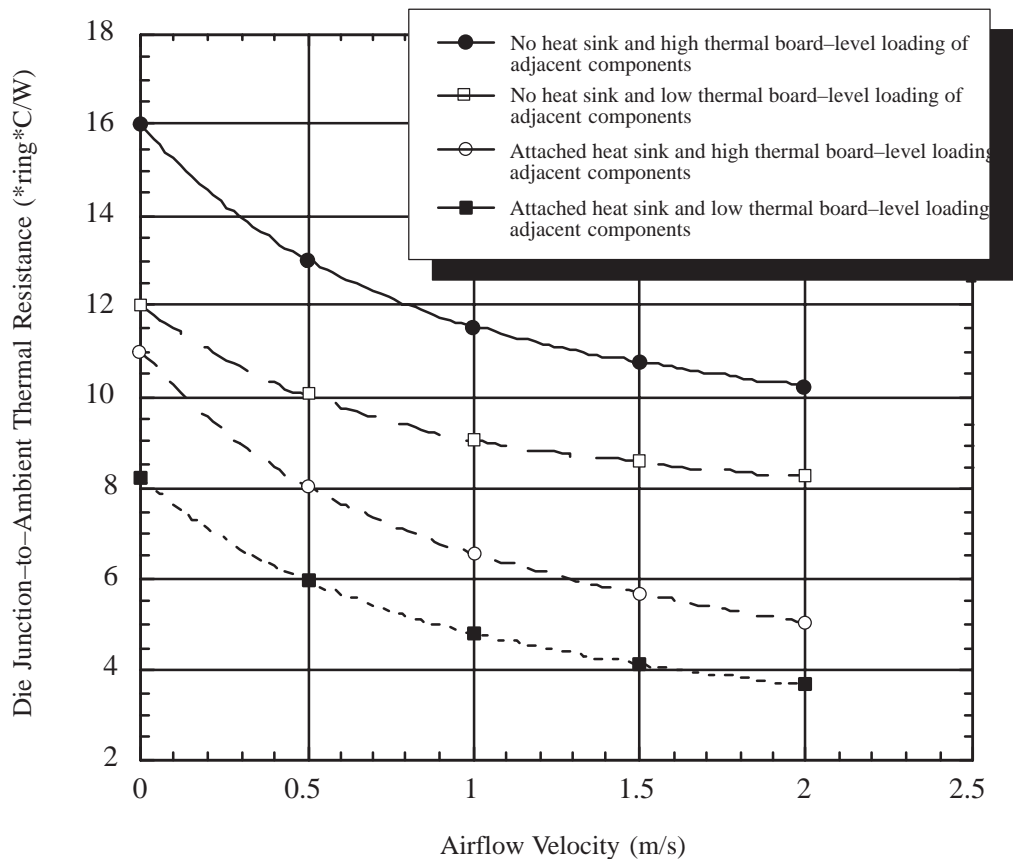


Figure 5: Die Junction-to-Ambient Resistance

The board designer can choose between several types of heat sinks to place on the PC8240. There are several commercially-available heat sinks for the PC8240 provided by the following vendors:

Chip Coolers Inc.
333 Strawberry Field Rd.
Warwick, RI 02887-6979
Internet: www.chipcoolers.com

800-227-0254 (USA/Canada)
401-739-7600

International Electronic Research Corporation (IERC)
135 W. Magnolia Blvd.
Burbank, CA 91502
Internet: www.ctscorp.com

818-842-7277

Thermalloy
2021 W. Valley View Lane
Dallas, TX 75234-8993
Internet: www.thermalloy.com

972-243-4321

Wakefield Engineering
100 Cummings Center, Suite 157H
Beverly, MA 01915
Internet: www.wakefield.com

781-406-3000

Aavid Engineering
250 Apache Trail
Terrell, TX 75160
Internet: www.aavid.com

972-551-7330

Ultimately, the final selection of an appropriate heat sink depends on many factors, such as thermal performance at a given air velocity, spatial volume, mass, attachment method, assembly, and cost.

3.5.3. Internal Package Conduction Resistance

For the TBGA, cavity down, packaging technology, shown in Figure 4, the intrinsic conduction thermal resistance paths are as follows:

- The die junction-to-case thermal resistance
- The die junction-to-ball thermal resistance

Figure 6 depicts the primary heat transfer path for a package with an attached heat sink mounted to a printed-circuit board.

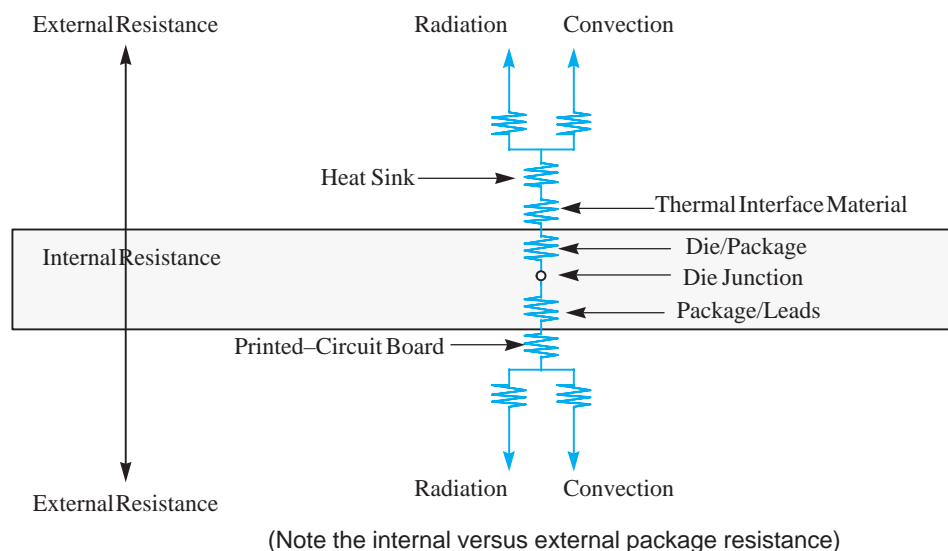


Figure 6: C4 Package with Heat Sink Mounted to a Printed-Circuit Board

For this cavity-down, wire-bond TBGA package, heat generated on the active side of the chip is conducted through the silicon, the die attach and package spreader, then through the heat sink attach material (or thermal interface material), and finally to the heat sink where it is removed by forced-air convection.

3.5.3.1. Adhesives and Thermal Interface Materials

A thermal interface material is recommended at the package lid-to-heat sink interface to minimize the thermal contact resistance. For those applications where the heat sink is attached by spring clip mechanism, Figure 7 shows the thermal performance of three thin-sheet thermal-interface materials (silicone, graphite/oil, fluoroether oil), a bare joint, and a joint with thermal grease as a function of contact pressure. As shown, the performance of these thermal interface materials improves with increasing contact pressure. The use of thermal grease significantly reduces the interface thermal resistance. That is, the bare joint results in a thermal resistance approximately 7 times greater than the thermal grease joint.

Heat sinks are attached to the package by means of a spring clip to holes in the printed-circuit board (see Figure 6). Therefore, the synthetic grease offers the best thermal performance, considering the low interface pressure. Of course, the selection of any thermal interface material depends on many factors—thermal performance requirements, manufacturability, service temperature, dielectric properties, cost, etc.

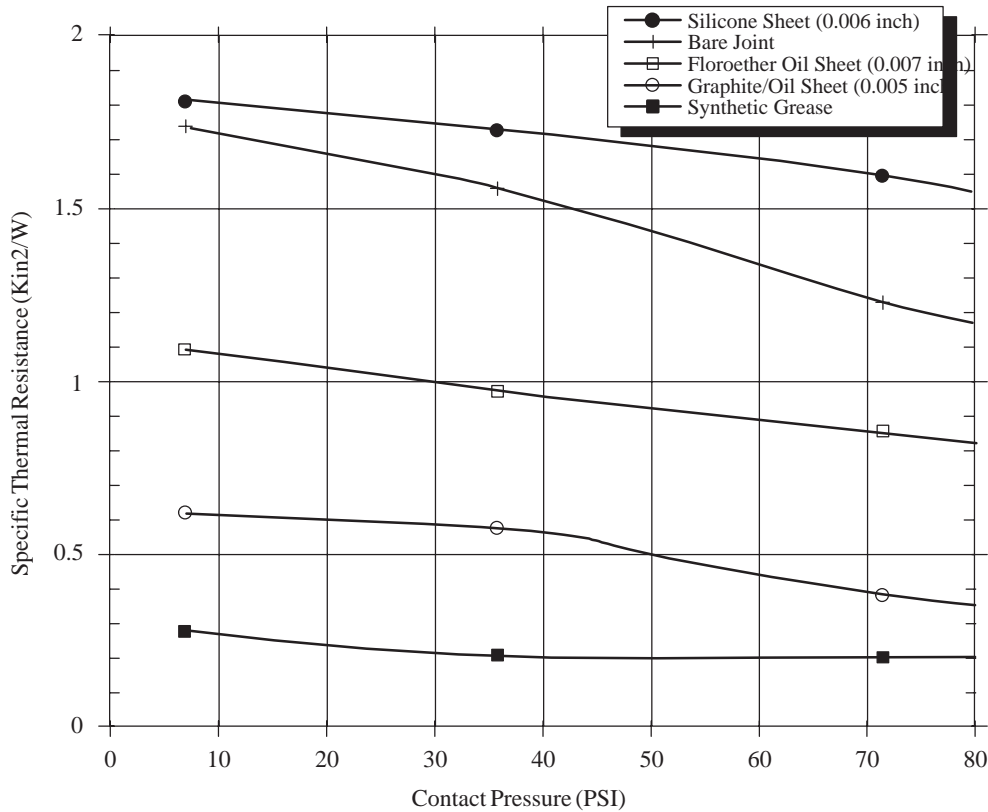


Figure 7: Thermal Performance of Select Thermal Interface Material

The board designer can choose between several types of thermal interface. Heat sink adhesive materials should be selected based upon high conductivity, yet adequate mechanical strength to meet equipment shock/vibration requirements. There are several commercially-available thermal interfaces and adhesive materials provided by the following vendors:

Dow-Corning Corporation 800-248-2481

Dow-Corning Electronic Materials
PO Box 0997
Midland, MI 48686-0997
Internet: www.dow.com

Chomerics, Inc. 781-935-4850
77 Dragon Court
Woburn, MA 01888-4014
Internet: www.chomerics.com

Thermagon Inc. 888-246-9050
3256 West 25th Street
Cleveland, OH 44109-1668
Internet: www.thermagon.com

Loctite Corporation 860-571-5100
1001 Trout Brook Crossing
Rocky Hill, CT 06067-3910
Internet: www.loctite.com

The following section provides a heat sink selection example using one of the commercially available heat sinks.

3.5.4. Heat Sink Selection Example

For preliminary heat sink sizing, the die-junction temperature can be expressed as follows:

$$T_J = T_A + T_R + (\theta_{JC} + \theta_{INT} + \theta_{SA}) * P_D$$

Where:

T_J is the die-junction temperature

T_A is the inlet cabinet ambient temperature

T_R is the air temperature rise within the computer cabinet

θ_{JC} is the junction-to-case thermal resistance

θ_{INT} is the adhesive or interface material thermal resistance

θ_{SA} is the heat sink base-to-ambient thermal resistance

P_D is the power dissipated by the device

During operation the die-junction temperatures (T_J) should be maintained less than the value specified in Table . The temperature of the air cooling the component greatly depends upon the ambient inlet air temperature and the air temperature rise within the electronic cabinet. An electronic cabinet inlet-air temperature (T_A) may range from 30 to 40 °C. The air temperature rise within a cabinet (T_R) may be in the range of 5 to 10 °C. The thermal resistance of the thermal interface material (θ_{INT}) is typically about 1 °C/W. Assuming a T_A of 30 °C, a T_R of 5 °C, a TBGA package $\theta_{JC} = 1.8$, and a power consumption (P_D) of 5.0 watts, the following expression for T_J is obtained:

$$\text{Die-junction temperature: } T_J = 30 \text{ °C} + 5 \text{ °C} + (1.8 \text{ °C/W} + 1.0 \text{ °C/W} + \theta_{SA}) * 5.0 \text{ W}$$

For preliminary heat sink sizing, the heat sink base-to-ambient thermal resistance is needed from the heat sink manufacturer.

Though the die junction-to-ambient and the heat sink-to-ambient thermal resistances are a common figure-of-merit used for comparing the thermal performance of various microelectronic packaging technologies, one should exercise caution when only using this metric in determining thermal management because no single parameter can adequately describe three-dimensional heat flow. The final die-junction operating temperature, is not only a function of the component-level thermal resistance, but the system-level design and its operating conditions. In addition to the component's power consumption, a number of factors affect the final operating die-junction temperature-airflow, board population (local heat flux of adjacent components), heat sink efficiency, heat sink attach, heat sink placement, next-level interconnect technology, system air temperature rise, altitude, etc.

Due to the complexity and the many variations of system-level boundary conditions for today's microelectronic equipment, the combined effects of the heat transfer mechanisms (radiation, convection and conduction) may vary widely. For these reasons, we recommend using conjugate heat transfer models for the board, as well as, system-level designs. To expedite system-level thermal analysis, several "compact" thermal-package models are available within FLOTHERM®. These are available upon request.

3.6. Power consideration

Table 5 provides *preliminary* power consumption data for the PC8240.

Table 5. Preliminary Power Consumption

At recommended operating conditions (see Table 3) with GVdd = 3.3 V \pm 5 % and LVdd = 3.3 V \pm 5 %

Mode	PCI Bus Clock / Memory Bus Clock CPU Clock Frequency (MHz)								Units	Notes
	33/66/ 166	33/66/ 200	33/66/ 233	33/83/ 250	33/100/ 200	33/100/ 250	66/100/ 200	66/100/ 250		
Typical	2.5	2.8	3.2	3.4	3.0	3.5	3.0	3.6	W	1, 5
Max - FP	3.0	3.4	3.8	4.1	3.6	4.2	3.6	4.3	W	1, 2
Max - INT	2.7	3.0	3.4	3.7	3.3	3.8	3.4	3.8	W	1, 3
Doze	1.8	2.0	2.2	2.4	2.2	2.6	2.2	2.6	W	1, 4, 6
Nap	700	700	700	800	900	900	900	900	mW	1, 4, 6
Sleep	500	500	500	500	500	500	800	800	mW	1, 4, 6
I/O Power Supplies										
Mode	Minimum				Maximum				Units	Notes
Typ - OVdd	200				600				mW	7,8
Typ - GVdd	300				900				mW	7,9

Notes:

- 1 The values include Vdd, AVdd, AVdd2, and LVdd but do not include I/O Supply Power, see Section 6.3.3 for information on OVdd and GVdd supply power.
- 2 Maximum - FP power is measured at Vdd = 2.625V with dynamic power management enabled while running an entirely cache-resident, looping, floating point multiplication instruction.
- 3 Maximum - INT power is measured at Vdd = 2.625V with dynamic power management enabled while running entirely cache-resident, looping, integer instructions.
- 4 Power saving mode maximums are measured at Vdd = 2.625V while the device is in doze, nap, or sleep mode.
- 5 Typical power is measured at Vdd = AVdd = 2.5V, OVdd = 3.3V where a nominal FP value, a nominal INT value, and a value where there is a continuous flush of cache lines with alternating ones and zeroes on 64 bit boundaries to local memory are averaged.
- 6 Power saving mode data measured with only two PCI_CLKs and two SDRAM_CLKs enabled.
- 7 The typical minimum I/O power values were results of the PC8240 performing cache resident integer operations at the slowest frequency combination of 33:66:166 (PCI:Mem:CPU) MHz.
- 8 The typical maximum OVdd value resulted from the PC8240 operating at the fastest frequency combination of 66:100:250 (PCI:Mem:CPU) MHz and performing continuous flushes of cache lines with alternating ones and zeroes to PCI memory.
- 9 The typical maximum GVdd value resulted from the PC8240 operating at the fastest frequency combination of 66:100:250 (PCI:Mem:CPU) MHz and performing continuous flushes of cache lines with alternating ones and zeroes on 64 bit boundaries to local memory.

Note:

To calculate the power consumption at low temperature (-55°C), use a 1.25 factor.

3.7. Marking

The document where are defined the marking are identified in the related reference documents. Each microcircuit are legible and permanently marked with the following information as minimum :

- ATMEL Logo,
- Manufacturer's part number,
- Class B identification if applicable,
- Date-code of inspection lot,
- ESD identifier if available,
- Country of manufacturing.

4. ELECTRICAL CHARACTERISTICS

4.1. Static characteristics

Table 6 provides the DC electrical characteristics for the PC8240.

Table 6. DC Electrical Specifications

At recommended operating conditions (See Table 3)

Characteristics	Conditions ⁴	Symbols	Min	Max	Units
Input High Voltage	PCI only	V_{IH}	$0.5 \cdot OV_{dd}$	LV_{dd}	V
Input Low Voltage	PCI only	V_{IL}	—	$.3 \cdot OV_{dd}$	V
Input High Voltage	All other pins ($GV_{dd} = 3.3V$)	V_{IH}	2.0	3.3	V
Input High Voltage	All other pins ($GV_{dd} = 2.5V$)	V_{IH}	1.8	2.5	V
Input Low Voltage	All inputs except OSC_IN	V_{IL}	GND	0.8	V
PCI_SYNC_IN Input High Voltage		CV_{IH}	$0.5 \cdot OV_{dd}$	—	V
PCI_SYNC_IN Input Low Voltage		CV_{IL}	GND	$0.3 \cdot OV_{dd}$	V
Input Leakage Current ⁵ for pins using DRV_PCI driver.	$0.5V \leq V_{IN} \leq 2.7V$ @ $LV_{dd} = 4.75$	I_L	—	70	A
Input Leakage Current ⁵ for pins using DRV_PCI driver.	$0.5V \leq V_{IN} \leq 5.5V$ @ $LV_{dd} = 5.5$	I_L	—	TBD	A
Input Leakage Current ⁵ all others	$LV_{dd} = 3.6V$ $GV_{dd} = 3.465$	I_L	—	10	A
Output High Voltage	$I_{OH} = N/A^3$ ($GV_{dd} = 3.3V$)	V_{OH}	2.4	—	V
Output Low Voltage	$I_{OL} = N/A^3$ ($GV_{dd} = 3.3V$)	V_{OL}	—	0.4	V
Output High Voltage	$I_{OH} = N/A^3$ ($GV_{dd} = 2.5V$)	V_{OH}	1.85	—	V
Output Low Voltage	$I_{OL} = N/A^3$ ($GV_{dd} = 2.5V$)	V_{OL}	—	0.6	V
Capacitance ²	$V_{IN} = 0V$, $f = 1MHz$	C_{IN}	—	7.0	pF

Notes:

- 1 See Table for pins with internal pull-up resistors.
- 2 Capacitance is periodically sampled rather than 100% tested.
- 3 See Table for the typical drive capability of a specific signal pin based upon the type of output driver associated with that pin as listed in .
- 4 These specifications are for the default driver strengths indicated in Table .
- 5 Leakage current is measured on input pins and on output pins in the high impedance state. The leakage current is measured for nominal OVdd/LVdd and Vdd or both OVdd/LVdd and Vdd must vary in the same direction.

Table 7 provides information on the characteristics of the output drivers referenced in . The values are from the PC8240 IBIS model (v1.0) and are not tested, for additional detailed information see the complete IBIS model listing at http://www.mot.com/SPS/PowerPC/teksupport/tools/IBIS/kahlua_1.ibs.txt

Table 7. Drive Capability of PC8240 Output Pins

Driver Type	Programmable Output Impedance (Ohms)	Supply Voltage	I _{OH}	I _{OL}	Units	Notes
DRV_STD	20	OVdd = 3.3V	TBD	TBD	mA	2, 5
	40 (default)	OVdd = 3.3V	TBD	TBD	mA	2, 5
DRV_PCI	25	LVdd = 3.3	11.0	20.6	mA	1, 4
		LVdd = 5.0	5.6	10.3	mA	1, 4
	50 (default)	LVdd = 3.3	5.6	10.3	mA	1, 4
		LVdd = 5.0	5.6	10.3	mA	1, 4
DRV_MEM_ADDR DRV_PCI_CLK	8 (default)	GVdd = 2.5	TBD	TBD	mA	3, 6
		GVdd = 3.3	89.0	76.3	mA	2, 5
	13.3	GVdd = 2.5	TBD	TBD	mA	3, 6
		GVdd = 3.3	55.9	46.4	mA	2, 5
	20	GVdd = 2.5	TBD	TBD	mA	3, 6
		GVdd = 3.3	36.7	30.0	mA	2, 5
	40	GVdd = 2.5	TBD	TBD	mA	3, 6
		GVdd = 3.3	TBD	TBD	mA	2, 5
DRV_MEM_DATA	20 (default)	GVdd = 2.5	TBD	TBD	mA	3, 6
		GVdd = 3.3	36.7	30.0	mA	2, 5
	40	GVdd = 2.5	TBD	TBD	mA	3, 6
		GVdd = 3.3	18.7	15.0	mA	2, 5

Notes:

- 1 For DRV_PCI, I_{OH} read from the listing in the pull-up mode, I(Min) column, at the 0.33V label by interpolating between the 0.3 V and 0.4 V table entries' current values which corresponds to the $PCI V_{OH} = 2.97 = 0.9 \cdot LVdd$ ($LVdd = 3.3 V$) where Table Entry Voltage = $LVdd - PCI V_{OH}$.
- 2 For all others with $Ovdd$ or $GVdd = 3.3 V$, I_{OH} read from the listing in the pull-up mode, I(Min) column, at the 0.9 V table entry which corresponds to the $V_{OH} = 2.4 V$ where Table Entry Voltage = $O/GVdd - PCI V_{OH}$.
- 3 For $GVdd = 2.5 V$, I_{OH} read from the listing in the pull-up mode, I(Min) column, at the TBD V table entry which corresponds to the $V_{OH} = TBD V$ where Table Entry Voltage = $GVdd - V_{OH}$.
- 4 For DRV_PCI, I_{OL} read from the listing in the pull-down mode, I(Max) column, at 0.33 V = $PCI V_{OL} = 0.1 \cdot LVdd$ ($LVdd = 3.3 V$) by interpolating between the 0.3 V and 0.4 V table entries.
- 5 For all others with $OVdd$ or $GVdd = 3.3 V$, I_{OL} read from the listing in the pull-down mode, I(Max) column, at the 0.4 V table entry.
- 6 For $GVdd = 2.5 V$, I_{OL} read from the listing in the pull-down mode, I(Max) column, at the TBD V table entry.

4.2. Dynamic Electrical Characteristics

This section provides the AC electrical characteristics for the PC8240. After fabrication, functional parts are sorted by maximum processor core frequency as shown in Table and Section , "Clock AC Timing Specifications" in table 9 and tested for conformance to the AC specifications for that frequency. The processor core frequency is determined by the bus (PCI_SYNC_IN) clock frequency and the settings of the PLL_CFG[0-4] signals. Parts are sold by maximum processor core frequency; see Section <1>. , "Ordering Information".

Table 8 provides the operating frequency information for the PC8240.

Table 8. Operating Frequency

At recommended operating conditions (See Table 3) with $GVdd = 3.3 V \pm 5\%$ and $LVdd = 3.3 V \pm 5\%$

Characteristic ¹	200 MHz		250 MHz		Units
	Min	Max	Min	Max	
Processor Frequency (CPU)	100	200	100	250	MHz
Memory Bus Frequency	25 – 100				MHz
PCI Input Frequency	25 – 66				MHz

Notes:

- 1 Caution: The PCI_SYNC_IN frequency and PLL_CFG[0–4] settings must be chosen such that the resulting peripheral logic/memory bus frequency, CPU (core) frequency, and PLL (VCO) frequencies do not exceed their respective maximum or minimum operating frequencies. Refer to the PLL_CFG[0–4] signal description in Section 6.2., "PLL Configuration," for valid PLL_CFG[0–4] settings and PCI_SYNC_IN frequencies.

4.2.1. Clock AC Specifications

Table 9 provides the clock AC timing specifications as defined in Section

Table 9. Clock AC Timing Specifications

At recommended operating conditions (See Table 3) with GVdd = 3.3 V \pm 5% and LVdd = 3.3 V \pm 5%

Num	Characteristics and Conditions ¹	Min	Max	Unit	Notes
	Frequency of Operation (PCI_SYNC_IN)	25	66	MHz	
1	PCI_SYNC_IN Cycle Time	40	15	ns	
2,3	PCI_SYNC_IN Rise and Fall Times	—	2.0	ns	2
4	PCI_SYNC_IN Duty Cycle Measured at 1.4 V.	40	60	%	
5a	PCI_SYNC_IN Pulse Width High Measured at 1.4V	6	9	ns	3
5b	PCI_SYNC_IN Pulse Width Low Measured at 1.4V	6	9	ns	3
7	PCI_SYNC_IN Short Term Jitter (Cycle to Cycle)	—	<500	ps	
8a	PCI_CLK[0–4] Skew (Pin to Pin)	0	500	ps	
8b	SDRAM_CLK[0–3] Skew (Pin to Pin)	TBD	TBD	ps	8
9	PCI_SYNC_IN Long Term Jitter	—	<500	ps	
10	Internal PLL Relock Time	—	100	μ s	3,4,6
	DLL Lock Range with DLL_EXTEND = 0 disabled (Default)	0 (NT _{clk} - t _{loop} - t _{fix0}) ⁷		ns	7
	DLL Lock Range with DLL_EXTEND = 1 enabled	0 (NT _{clk} - T _{clk} /2 - t _{loop} - t _{fix0}) ⁷		ns	7
	Frequency of Operation (OSC_IN)	25	66	MHz	
	OSC_IN Cycle Time	40	15	ns	
	OSC_IN Rise and Fall Times	—	5	ns	5
	OSC_IN Duty Cycle Measured at 1.4 V.	40	60	%	
	OSC_IN Frequency Stability	—	100	ppm	
	OSC_IN Jitter (Cycle to Cycle)	—	<TBD	ps	
	OSC_IN V _{IH} (Loaded)	TBD		V	
	OSC_IN V _{IL} (Loaded)		TBD	V	

Notes:

- 1 These specifications are for the default driver strengths indicated in Table 7.
- 2 Rise and fall times for the PCI_SYNC_IN input are measured from 0.4 to 2.4 V.
- 3 Specification value at maximum frequency of operation.
- 4 Relock time is guaranteed by design and characterization. Relock time is not tested.
- 5 Rise and fall times for the OSC_IN input is guaranteed by design and characterization. OSC_IN input rise and fall times are not tested.

- 6 Relock timing is guaranteed by design. PLL-relock time is the maximum amount of time required for PLL lock after a stable Vdd and PCI_SYNC_IN are reached during the reset sequence. This specification also applies when the PLL has been disabled and subsequently re-enabled during sleep mode. Also note that $\overline{\text{HRST_CPU}} / \overline{\text{HRST_CTRL}}$ must be held asserted for a minimum of 255 bus clocks after the PLL-relock time during the reset sequence.
- 7 DLL_EXTEND is bit 7 of the PMC2 register <72>. N is a non-zero integer (1, 2, 3, ...). T_{clk} is the period of one SDRAM_SYNC_OUT clock cycle in ns. t_{loop} is the propagation delay of the DLL synchronization feedback loop (PC board runner) from SDRAM_SYNC_OUT to SDRAM_SYNC_IN in ns; 6.25 inches of loop length (unloaded PC board runner) corresponds to approximately 1 ns of delay. t_{fix0} is a fixed delay inherent in the design when the DLL is at tap point 0 and the DLL is contributing no delay; t_{fix0} equals approximately 3 ns. See Figure 9 for DLL locking ranges.
- 8 Pin to pin skew includes quantifying the additional amount of clock skew (or jitter) from the DLL besides any intentional skew added to the clocking signals from the variable length DLL synchronization feedback loop, i.e. the amount of variance between the internal sys-logic_clk and the SDRAM_SYNC_IN signal after the DLL is locked. While pin to pin skew between SDRAM_CLKs can be measured, the relationship between the internal sys-logic_clk and the external SDRAM_SYNC_IN can not be measured and is guaranteed by design.

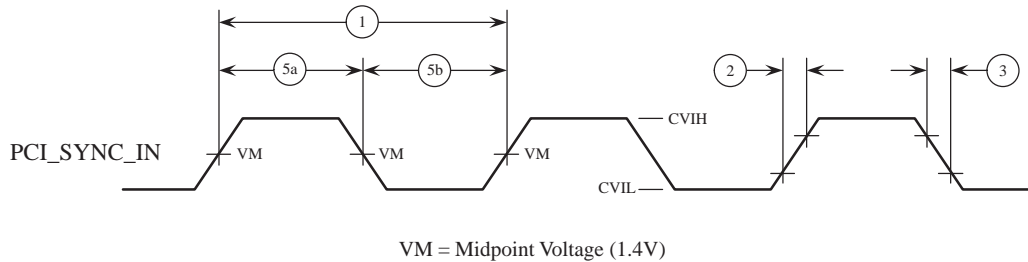


Figure 8: PCI_SYNC_IN Input Clock Timing Diagram

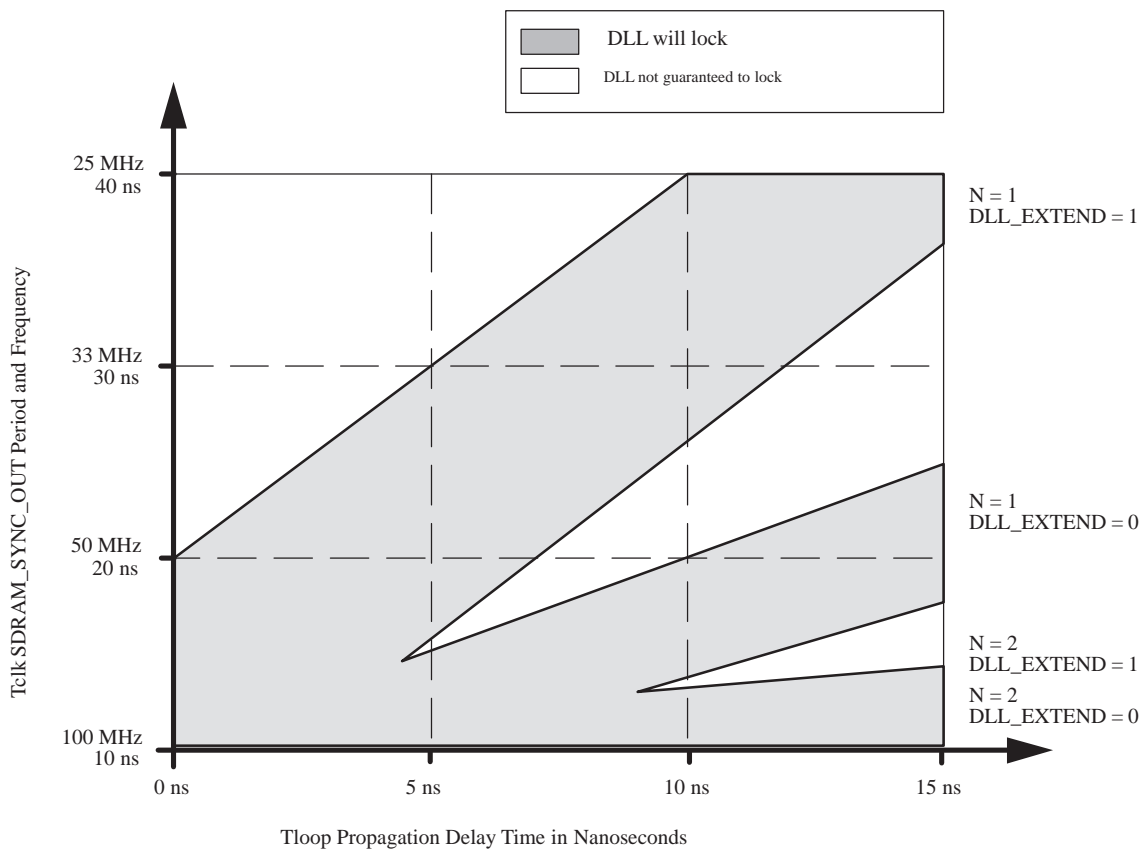


Figure 9: DLL Locking Range Loop Delay vs. Frequency of Operation

4.2.2. Input AC Timing Specifications

Table 10 provides the input AC timing specifications. See Figure 10 and Figure 11.

Table 10. Input AC Timing Specifications

At recommended operating conditions (See Table 3) with GVdd = 3.3 V \pm 5% and LVdd = 3.3 V \pm 5%

Num	Characteristic	Min	Max	Units	Notes
10a	PCI Input Signals Valid to PCI_SYNC_IN (Input Setup)	2.0	—	ns	2,3
10b1	Memory Control & Data Input Signals in Flow Through Mode Valid to SDRAM_SYNC_IN (Input Setup)	4.0	—	ns	1,3
10b2	Memory Control & Data Input Signals in Registered Mode Valid to SDRAM_SYNC_IN (Input Setup)	TBD	—	ns	1,3
10c	Epic, Misc. Debug Input Signals Valid to SDRAM_SYNC_IN (Input Setup)	TBD	—	ns	1,3
10d	I ² C Input Signals Valid to SDRAM_SYNC_IN (Input Setup)	TBD	—	ns	1,3
10e	Mode select Inputs Valid to HRST_CPU / HRST_CTRL (Input Setup)	9*t _{CLK}	—	ns	1,3-5
11a	PCI_SYNC_IN (SDRAM_SYNC_IN) to Inputs Invalid (Input Hold)	1.0	—	ns	1,2,3
11b	HRST_CPU / HRST_CTRL to Mode select Inputs Invalid (Input Hold)	TBD	—	ns	1,3,5

Notes:

- All memory and related interface input signal specifications are measured from the TTL level (0.8 or 2.0 V) of the signal in question to the $V_M = 1.4$ V of the rising edge of the memory bus clock, SDRAM_SYNC_IN. SDRAM_SYNC_IN is the same as PCI_SYNC_IN in 1:1 mode, but is twice the frequency in 2:1 mode (processor/memory bus clock rising edges occur on every rising and falling edge of PCI_SYNC_IN). See Figure 10.
- All PCI signals are measured from OVdd/2 of the rising edge of PCI_SYNC_IN to 0.4*OVdd of the signal in question for 3.3 V PCI signaling levels. See Figure 11.
- Input timings are measured at the pin.
- t_{CLK} is the time of one SDRAM_SYNC_IN clock cycle.
- All mode select input signals specifications are measured from the TTL level (0.8 or 2.0 V) of the signal in question to the $V_M = 1.4$ V of the rising edge of the HRST_CPU / HRST_CTRL signal. See Figure 12.

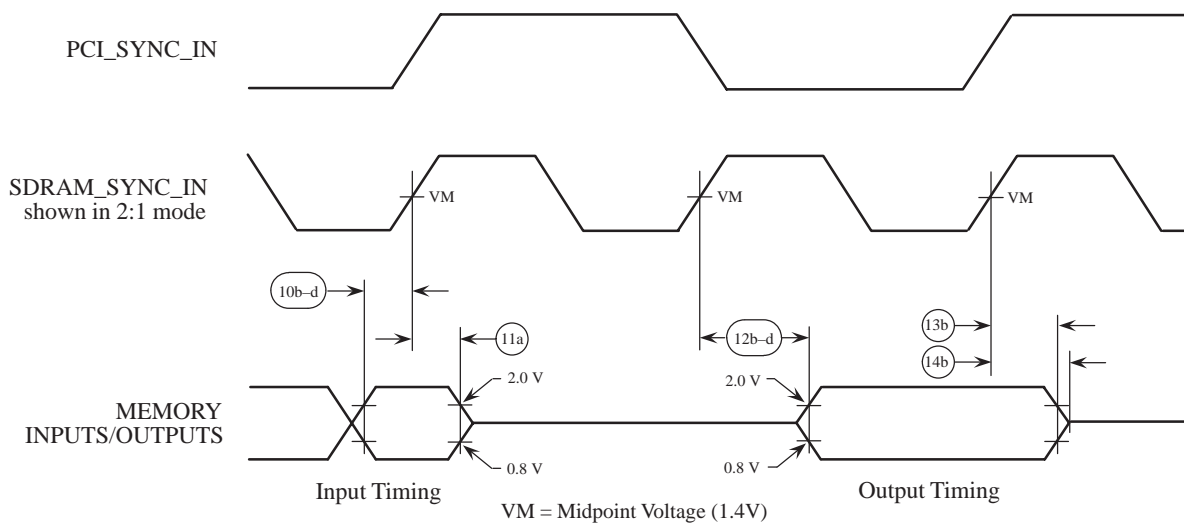


Figure 10: Input - Output Timing Diagram Referenced to SDRAM_SYNC_IN

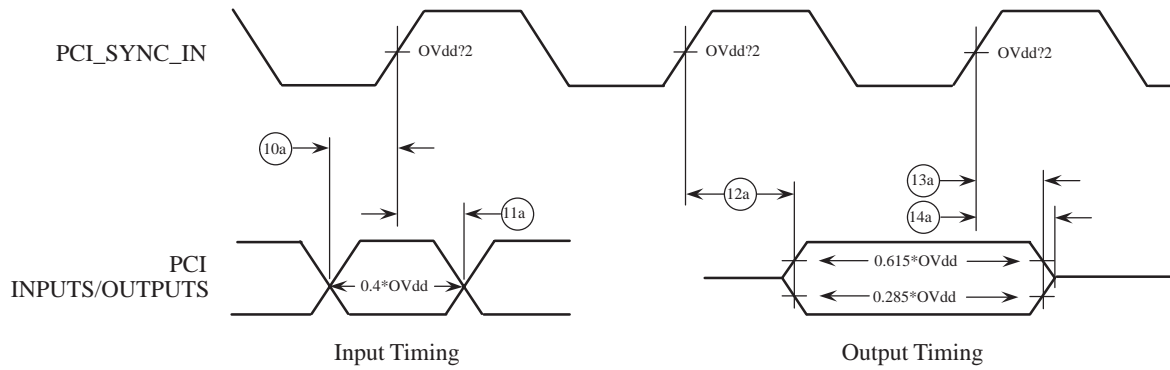


Figure 11: Input - Output Timing Diagram Referenced to PCI_SYNC_IN

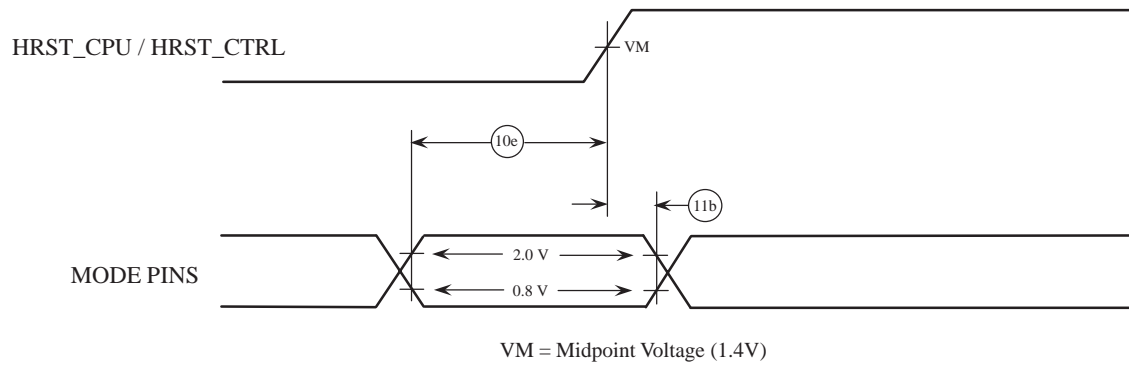


Figure 12: . Input Timing Diagram for Mode Select Signals

4.2.3. Output AC Timing Specification

Table 11 provides the processor bus AC timing specifications for the PC8240. See Figure 10 and Figure 11.

Table 11. Output AC Timing Specifications

At recommended operating conditions (See Table 3) with GVdd = 3.3 V \pm 5% and LVdd = 3.3 V \pm 5%

Num	Characteristic ^{3,6}	Min	Max	Units	Notes
12a	PCI_SYNC_IN to Output Valid, 66 MHz PCI, with \overline{MCP} pulled-down to logic 0 state. See Table .	—	6.0	ns	2,4
	PCI_SYNC_IN to Output Valid, 33 MHz PCI, with \overline{MCP} in the default logic 1 state. See Table .	—	8.0	ns	2,4
12b1	SDRAM_SYNC_IN to Output Valid (For Memory Control & Data Signals accessing DRAM in Flow Through Mode)	—	7.0	ns	1
12b2	SDRAM_SYNC_IN to Output Valid (For Memory Control & Data Signals accessing DRAM in Registered Mode)	—	TBD	ns	1
12b3	SDRAM_SYNC_IN to Output Valid (For Memory Control & Data Signals accessing non-DRAM.)	—	TBD	ns	1
12c	SDRAM_SYNC_IN to Output Valid (For All Others)	—	7.0	ns	1
12d	SDRAM_SYNC_IN to Output Valid (For I ² C)	—	TBD	ns	1
13a	Output Hold, 66 MHz PCI, with \overline{MCP} and CKE pulled-down to logic 0 states. See Table 12.	0.5	—	ns	2,4,5
	Output Hold, 33 MHz PCI, with \overline{MCP} in the default logic 1 state and CKE pulled-down to logic 0 state. See Table 12.	2.0	—	ns	2,4,5
13b	Output Hold (All Others)	0	—	ns	1
14a	PCI_SYNC_IN to Output High Impedance (For PCI)	—	TBD	ns	2,4
14b	SDRAM_SYNC_IN to Output High Impedance (For All Others)	—	TBD	ns	1

Notes:

- 1 All memory and related interface output signal specifications are specified from the $V_M = 1.4$ V of the rising edge of the memory bus clock, SDRAM_SYNC_IN to the TTL level (0.8 or 2.0 V) of the signal in question. SDRAM_SYNC_IN is the same as PCI_SYNC_IN in 1:1 mode, but is twice the frequency in 2:1 mode (processor/memory bus clock rising edges occur on every rising and falling edge of PCI_SYNC_IN). See Figure 10.
- 2 All PCI signals are measured from OVdd/2 of the rising edge of PCI_SYNC_IN to 0.285*OVdd or 0.615*OVdd of the signal in question for 3.3 V PCI signaling levels. See Figure 11.
- 3 All output timings assume a purely resistive 50 ohm load (See Figure 13). Output timings are measured at the pin; time-of-flight delays must be added for trace lengths, vias, and connectors in the system.
- 4 PCI Bussed signals are composed of the following signals: \overline{LOCK} , \overline{IRDY} , $\overline{C/BE}[0-3]$, \overline{PAR} , \overline{TRDY} , \overline{FRAME} , \overline{STOP} , \overline{DEVSEL} , \overline{PERR} , \overline{SERR} , $AD[0-31]$, $REQ[4-0]$, $\overline{GNT}[4-0]$, \overline{IDSEL} , \overline{INTA} .
- 5 PCI hold times can be varied, see AUCUN LIEN “PCI Signal Output Hold Timing” section for information on programmable PCI output hold times. The values shown for item 13a are for PCI compliance.
- 6 These specifications are for the default driver strengths indicated in Table 3.

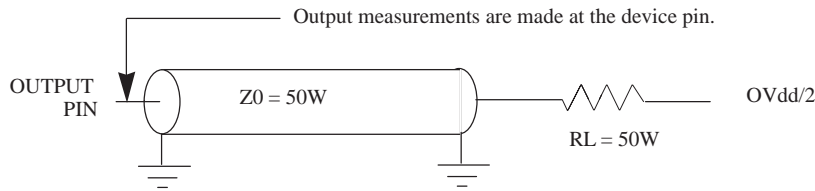


Figure 13: AC Test Load for the PC8240

4.2.3.1. PCI Signal Output Hold Timing

In order to meet minimum output hold specifications relative to PCI_SYNC_IN for both 33 MHz and 66 MHz PCI systems, the PC8240 has a programmable output hold delay for PCI signals. The initial value of the output hold delay is determined by the values on the \overline{MCP} and CKE reset configuration signals. Further output hold delay values are available by programming the PCI_HOLD_DEL value of the PMCR2 configuration register.

Table 12 describes the bit values for the PCI_HOLD_DEL values in PMCR2.

Table 12. Power Management Configuration Register 2-0x72

Bit	Name	Reset Value	Description
6–4	PCI_HOLD_DEL	xx0	<p>PCI output hold delay values relative to PCI_SYNC_IN. The initial values of bits 6 and 5 are determined by the reset configuration pins \overline{MCP} and CKE, respectively. As these two pins have internal pull-up resistors, the default value after reset is 0b110.</p> <p>While the minimum hold times are guaranteed at shown values, changes in the actual hold time can be made by incrementing or decrementing the value in these bit fields of this register via software or hardware configuration. The increment is in approximately 400 picosecond steps. Lowering the value in the three bit field decreases the amount of output hold available.</p> <p>000 66 MHz PCI. Pull-down \overline{MCP} configuration pin with a 2K or less value resistor. This setting guarantees the minimum output hold, item 13a, and the maximum output valid, item 12a, times as specified in Table are met for a 66 MHz PCI system. See Figure 14.</p> <p>001</p> <p>010</p> <p>011</p> <p>100 33 MHz PCI. This setting guarantees the minimum output hold, item 13a, and the maximum output valid, item 12a, times as specified in Table are met for a 33 MHz PCI system. See Figure 14.</p> <p>101</p> <p>110 (Default if reset configuration pins left unconnected)</p> <p>111</p>

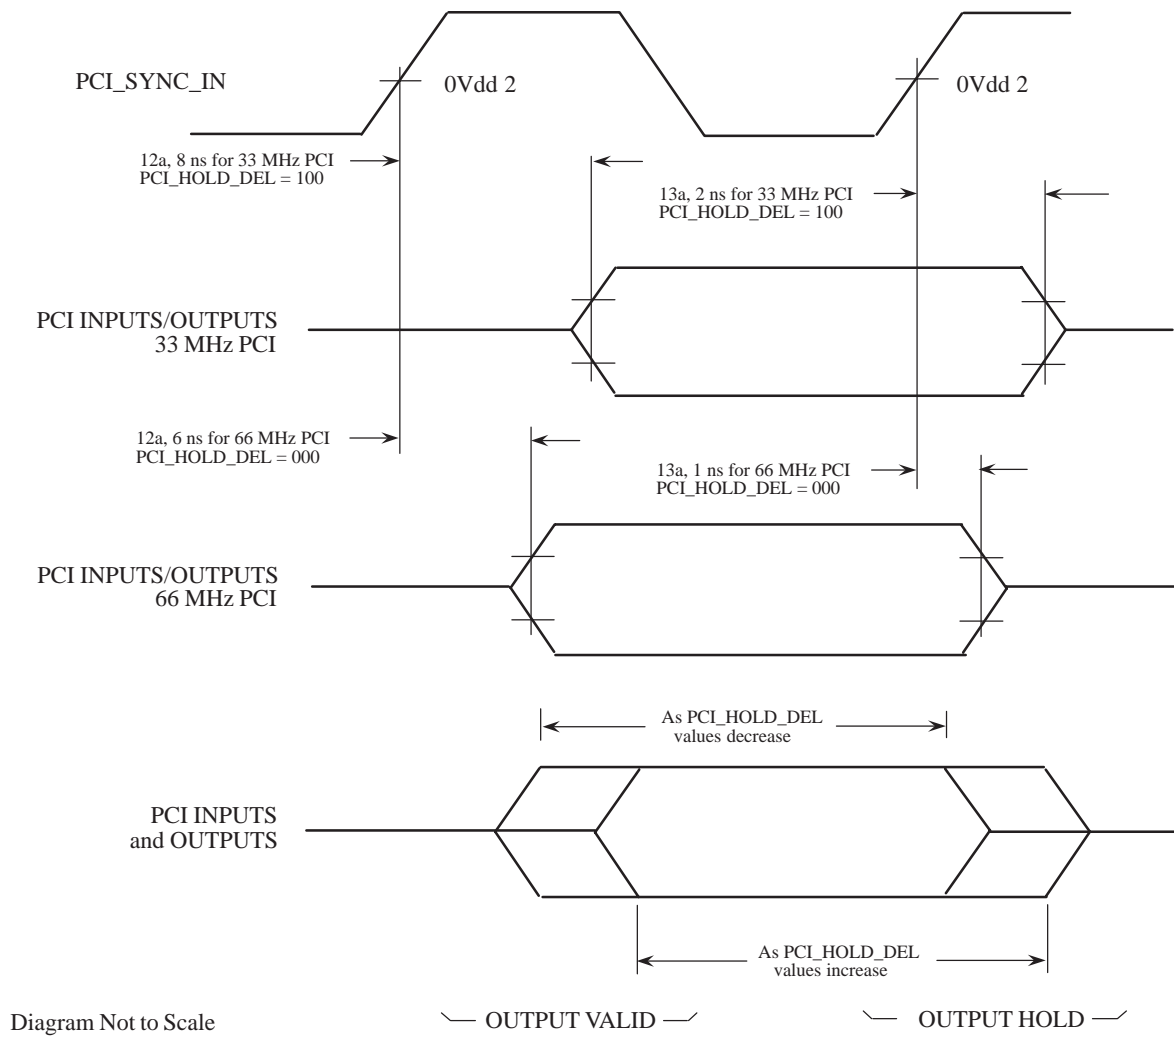


Figure 14: PCI_HOLD_DEL Affect on Output Valid and Hold Time

4.2.4. I²C AC Timing Specifications

Table 13 provides the I²C input AC timing specifications for the PC8240.

Table 13. I²C Input AC Timing Specifications

At recommended operating conditions (See Table 3) with GVdd = 3.3 V ± 5% and LVdd = 3.3 V ± 5%

Num	Characteristic	Min	Max	Unit	Notes
1	Start condition hold time	4.0	—	CLKs	1,2
2	Clock low period (The time before the PC8240 will drive SCL low as a transmitting slave after detecting SCL low as driven by an external master.)	$8.0 + (16 \times 2^{\text{FDR}[4:2]}) \times (5 - 4(\{\text{FDR}[5], \text{FDR}[1]\} == \text{b}'10\}) - 3(\{\text{FDR}[5], \text{FDR}[1]\} == \text{b}'11\}) - 2(\{\text{FDR}[5], \text{FDR}[1]\} == \text{b}'00\}) - 1(\{\text{FDR}[5], \text{FDR}[1]\} == \text{b}'01\})$	—	CLKs	1,2,4, 5
3	SCL/SDA rise time (from 0.5v to 2.4v)	—	1	mS	
4	Data hold time	0	—	nS	2
5	SCL/SDA fall time (from 2.4 to 0.5v)	—	1	mS	
6	Clock high period (Time needed to either receive a data bit or generate a START or STOP.)	5.0	—	CLKs	1,2, 5
7	Data setup time	3.0	—	ns	3
8	Start condition setup time (for repeated start condition only)	4.0	—	CLKs	1,2
9	Stop condition setup time	4.0	—	CLKs	1,2

Notes:

- Units for these specifications are in SDRAM_CLK units.
- The actual values depend on the setting of the Digital Filter Frequency Sampling Rate (DFFSR) bits in the Frequency Divider Register I2CFDR. Therefore, the noted timings in the above table are all relative to qualified signals. The qualified SCL and SDA are delayed signals from what is seen in real time on the I²C bus. The qualified SCL, SDA signals are delayed by the SDRAM_CLK clock times DFFSR times 2 plus 1 SDRAM_CLK clock. The resulting delay value is added to the value in the table (where this note is referenced). See Figure 16.
- Timing is relative to the Sampling Clock (not SCL).
- FDR[x] refers to the Frequency Divider Register I2CFDR bit x.
- Input clock low and high periods in combination with the FDR value in the Frequency Divider Register (I2CFDR) determine the maximum I²C input frequency. See Table 13.

Table 14 provides the I²C Frequency Divider Register (I2CFDR) information for the PC8240.

Table 14. PC8240 Maximum I²C Input Frequency

FDR Hex ²	Divider ² (Dec)	Max I ² C Input Frequency ¹			
		SDRAM_CLK @ 25 MHz	SDRAM_CLK @ 33 MHz	SDRAM_CLK @ 50 MHz	SDRAM_CLK @ 100 MHz
20, 21	160, 192	862	1.13 MHz	1.72 MHz	3.44 MHz
22, 23, 24, 25	224, 256, 320, 384	555	733	1.11 MHz	2.22 MHz
0, 1	288, 320	409	540	819	1.63 MHz
2, 3, 26, 27, 28, 29	384, 448, 480, 512, 640, 768	324	428	649	1.29 MHz
4, 5	576, 640	229	302	458	917
6, 7, 2A, 2B, 2C, 2D	768, 896, 960, 1024, 1280, 1536	177	234	354	709
8, 9	1152, 1280	121	160	243	487
A, B, 2E, 2F, 30, 31	1536, 1792, 1920, 2048, 2560, 3072	92	122	185	371
C, D	2304, 2560	62	83	125	251
E, F, 32, 33, 34, 35	3072, 3584, 3840, 4096, 5120, 6144	47	62	95	190
10, 11	4608, 5120	32	42	64	128
12, 13, 36, 37, 38, 39	6144, 7168, 7680, 8192, 10240, 12288	24	31	48	96
14, 15	9216, 10240	16	21	32	64
16, 17, 3A, 3B, 3C, 3D	12288, 14336, 15360, 16384, 20480, 24576	12	16	24	48
18, 19	18432, 20480	8	10	16	32
1A, 1B, 3E, 3F	24576, 28672, 30720, 32768	6	8	12	24
1C, 1D	36864, 40960	4	5	8	16
1E, 1F	49152, 61440	3	4	6	12

Notes:

- 1 Values are in KHz unless otherwise specified.
- 2 FDR Hex and Divider (Dec) values are listed in corresponding order.
- 3 Multiple Divider (Dec) values will generate the same input frequency but each Divider (Dec) value will generate a unique output frequency as shown in Table .

Table 15 provides the I²C output AC timing specifications for the PC8240.

Table 15. I²C Output AC Timing Specifications

At recommended operating conditions (See Table 3) with GVdd = 3.3 V ± 5% and LVdd = 3.3 V ± 5%

Num	Characteristic	Min	Max	Unit	Notes
1	Start condition hold time	$(FDR[5] == 0) \times (D_{FDR}/16) / 2N + (FDR[5] == 1) \times (D_{FDR}/16) / 2M$	—	CLKs	1,2,5
2	Clock low period	$D_{FDR} / 2$	—	CLKs	1,2,5
3	SCL/SDA rise time (from 0.5 V to 2.4 V)	—	—	mS	3
4	Data hold time	$8.0 + (16 \times 2^{FDR[4:2]}) \times (5 - 4(\{FDR[5], FDR[1]\} == b'10) - 3(\{FDR[5], FDR[1]\} == b'11) - 2(\{FDR[5], FDR[1]\} == b'00) - 1(\{FDR[5], FDR[1]\} == b'01))$	—	CLKs	1,2,5
5	SCL/SDA fall time (from 2.4 V to 0.5 V)	—	< 5	ns	4
6	Clock high time	$D_{FDR} / 2$	—	CLKs	1,2,5
7	Data setup time (PC8240 as a master only.)	$(D_{FDR} / 2) - (\text{Output data hold time})$	—	CLKs	1,5
8	Start condition setup time (for repeated start condition only)	$D_{FDR} + (\text{Output start condition hold time})$	—	CLKs	1,2,5
9	Stop condition setup time	4.0	—	CLKs	1,2

Notes:

- Units for these specifications are in SDRAM_CLK units.
- The actual values depend on the setting of the Digital Filter Frequency Sampling Rate (DFFSR) bits in the Frequency Divider Register I2CFDR. Therefore, the noted timings in the above table are all relative to qualified signals. The qualified SCL and SDA are delayed signals from what is seen in real time on the I²C bus. The qualified SCL, SDA signals are delayed by the SDRAM_CLK clock times DFFSR times 2 plus 1 SDRAM_CLK clock. The resulting delay value is added to the value in the table (where this note is referenced). See Figure 16.
- Since SCL and SDA are open-drain type outputs, which the PC8240 can only drive low, the time required for SCL or SDA to reach a high level depends on external signal capacitance and pull-up resistor values.
- Specified at a nominal 50pF load.
- D_{FDR} is the decimal divider number indexed by FDR[5:0] value. Refer to the I²C Interface chapter's Serial Bit Clock Frequency Divider Selections table. FDR[x] refers to the Frequency Divider Register I2CFDR bit x. N is equal to a variable number that would make the result of the divide (Data Hold Time value) equal to a number less than 16. M is equal to a variable number that would make the result of the divide (Data Hold Time value) equal to a number less than 9.

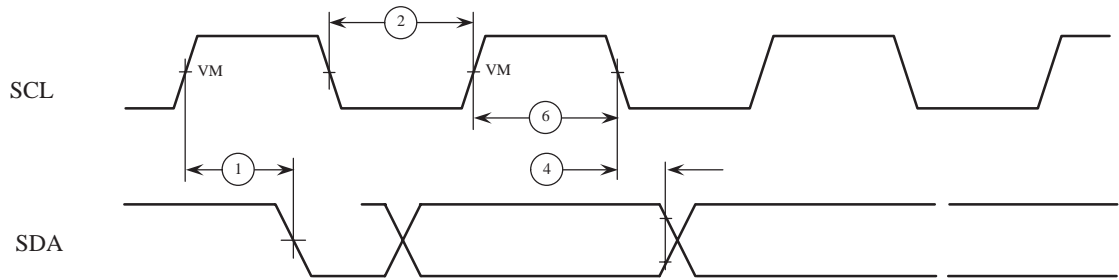


Figure 15: I²C Timing Diagram I


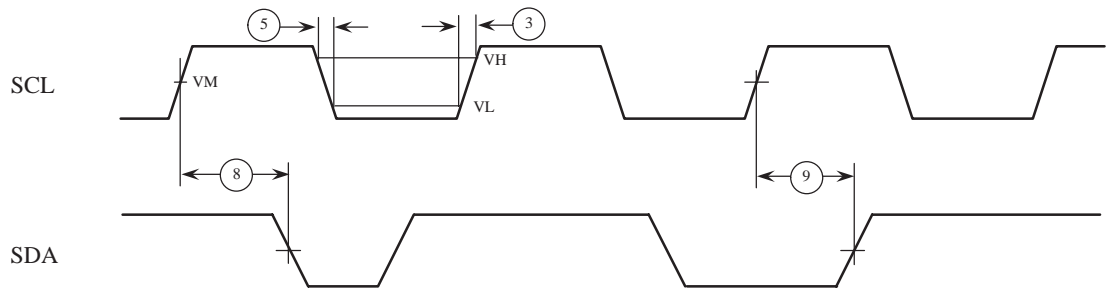



Figure 16: I²C Timing Diagram II

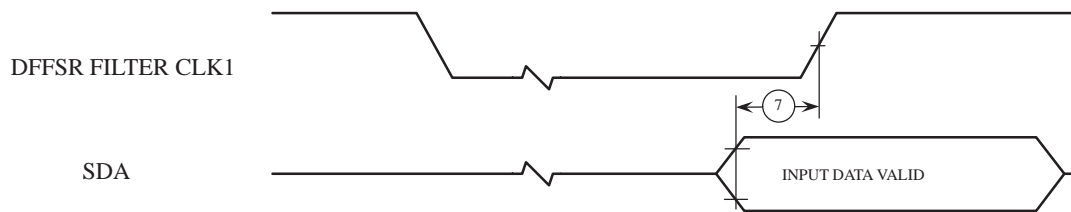

Notes:

- 1 DFFSR Filter Clock is the SDRAM_CLK clock times DFFSR value.

Figure 17: I²C Timing Diagram III

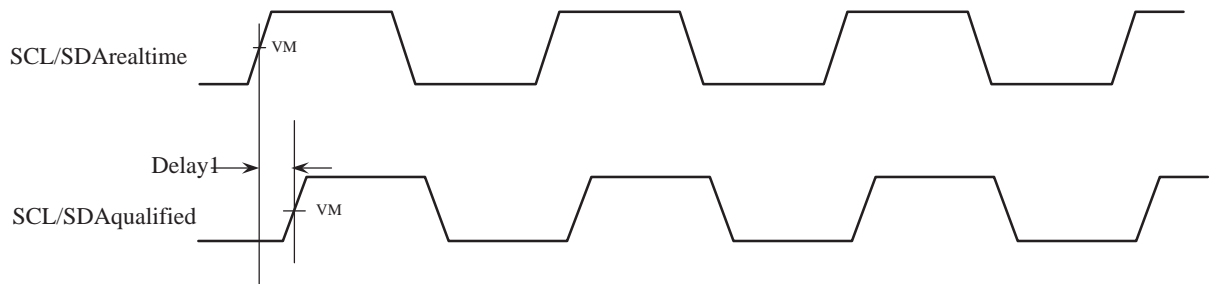

Notes:

- 1 The delay is the Local Memory clock times DFFSR times 2 plus 1 Local Memory clock.

Figure 18: I²C Timing Diagram IV (Qualified Signal)

4.2.5. EPIC Serial Interrupt Mode AC Timing Specifications

Table 16 provides the EPIC serial interrupt mode AC timing specifications for the PC8240.

Table 16. EPIC Serial Interrupt Mode AC Timing Specifications

At recommended operating conditions (See Table 3) with GVdd = 3.3 V ± 5% and LVdd = 3.3 V ± 5%

Num	Characteristic	Min	Max	Unit	Notes
1	S_CLK Frequency	1/14 SDRAM_SYNC_IN	1/2 SDRAM_SYNC_IN	MHz	1
2	S_CLK Duty Cycle	40	60	%	
3	S_CLK Output Valid Time	–	TBD = x	nS	
4	Output Hold Time	0	–	nS	
5	S_FRAME, S_RST Output Valid Time	–	1 sys_logic_clk period + x	nS	2
6	S_INT Input Setup Time to S_CLK	1 sys_logic_clk period + TBD	–	nS	2
7	S_INT Inputs Invalid (Hold Time) to S_CLK	–	0	nS	2

Notes:

- 1 See the PC8240 User's Manual for a description of the EPIC Interrupt Control Register (EICR) describing S_CLK frequency programming.
- 2 S_RST, S_FRAME, and S_INT shown in Figure 19 and Figure 20 depict timing relationships to sys_logic_clk and S_CLK and do not describe functional relationships between S_RST, S_FRAME, and S_INT. See the Motorola's PC8240 User's Manual for a complete description of the functional relationships between these signals.
- 3 The sys_logic_clk waveform is the clocking signal of the internal peripheral logic from the output of the peripheral logic PLL; sys_logic_clk is the same as SDRAM_SYNC_IN when the SDRAM_SYNC_OUT to SDRAM_SYNC_IN feedback loop is implemented and the DLL is locked. See the Motorola's PC8240 User's Manual for a complete clocking description.

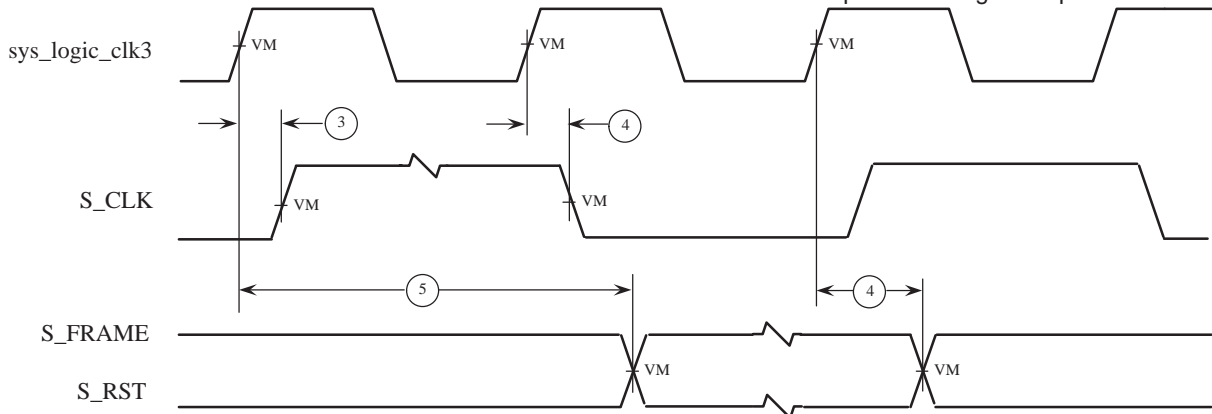


Figure 19: EPIC Serial Interrupt Mode Output Timing Diagram

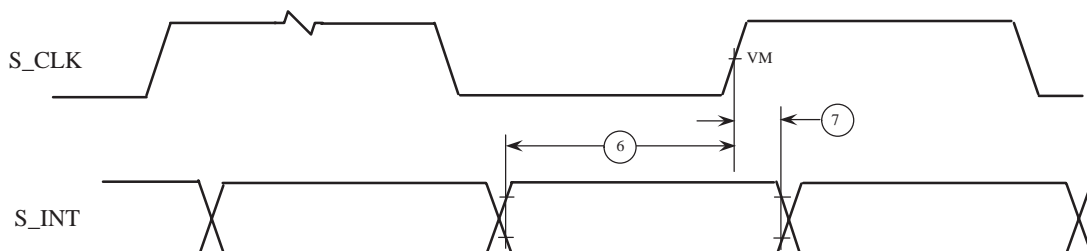


Figure 20: EPIC Serial Interrupt Mode Input Timing Diagram

4.2.6. IEEE 1149.1 (JTAG) AC Timing Specifications

Table 17 provides the JTAG AC timing specifications for the PC8240 while in the JTAG operating mode.



Table 17. JTAG AC Timing Specification (Independent of PCI_SYNC_IN)

At recommended operating conditions (See Table 3) with GVdd = 3.3 V \pm 5% and LVdd = 3.3 V \pm 5%

Num	Characteristic ^{4,5}	Min	Max	Unit	Notes
	TCK Frequency of Operation	0	25	MHz	
1	TCK Cycle Time	40	—	ns	
2	TCK Clock Pulse Width Measured at 1.5 V	20	—	ns	
3	TCK Rise and Fall Times	0	3	ns	
4	TRST_ Setup Time to TCK Falling Edge	10	—	ns	1
5	TRST_ Assert Time	10	—	ns	
6	Input Data Setup Time	5	—	ns	2
7	Input Data Hold Time	15	—	ns	2
8	TCK to Output Data Valid	0	30	ns	3
9	TCK to Output High Impedance	0	30	ns	3
10	TMS, TDI Data Setup Time	5	—	ns	
11	TMS, TDI Data Hold Time	15	—	ns	
12	TCK to TDO Data Valid	0	15	ns	
13	TCK to TDO High Impedance	0	15	ns	

Notes:

- 1 $\overline{\text{TRST}}$ is an asynchronous signal. The setup time is for test purposes only.
- 2 Non-test (other than TDI and TMS) signal input timing with respect to TCK.
- 3 Non-test (other than TDO) signal output timing with respect to TCK.
- 4 Timings are independent of the system clock (PCI_SYNC_IN).

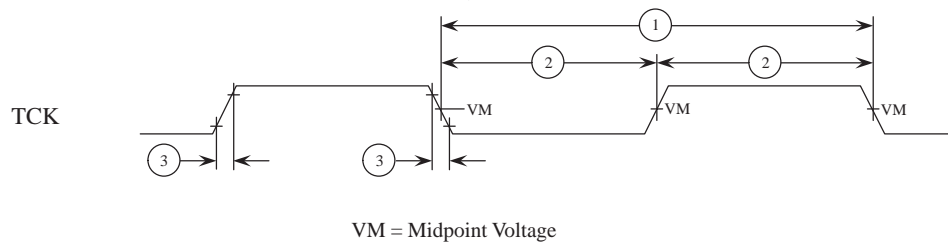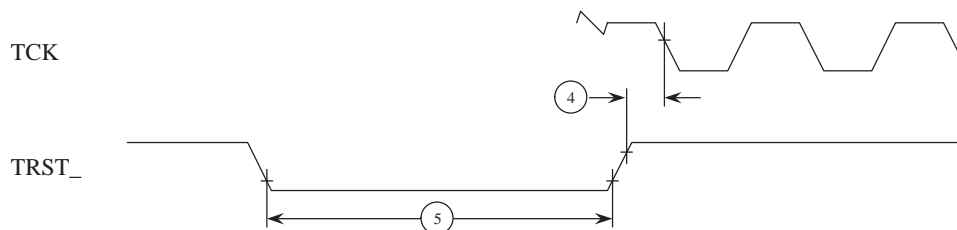**Figure 21: JTAG Clock Input Timing Diagram****Figure 22: JTAG TRST Timing Diagram**

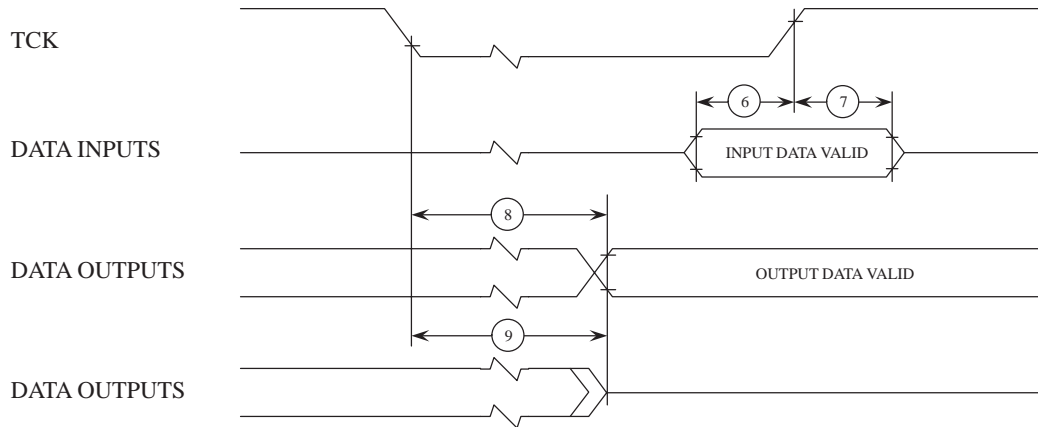


Figure 23: JTAG Boundary Scan Timing Diagram

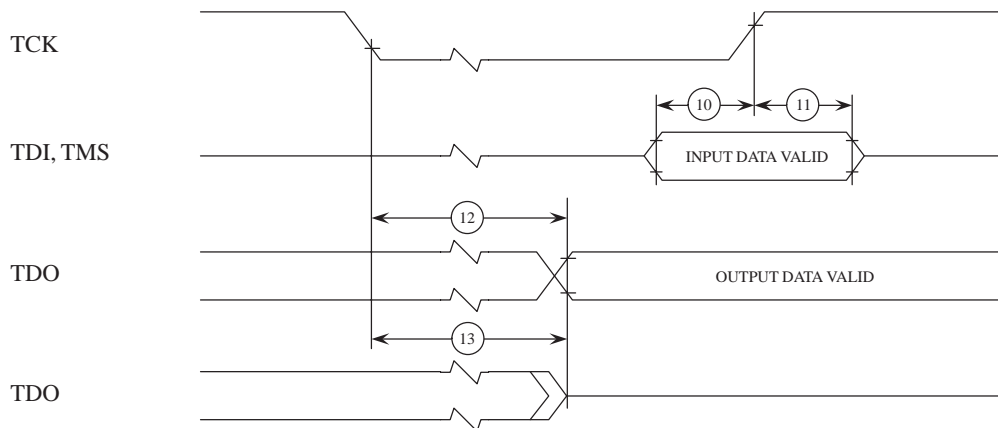


Figure 24: Test Access Port Timing Diagram

5. PREPARATION FOR DELIVERY

5.1. Packaging

Microcircuits are prepared for delivery in accordance with MIL-PRF-38535.

5.2. Certificate of compliance

TCS offers a certificate of compliances with each shipment of parts, affirming the products are in compliance either with MIL-STD-883 and guarantying the parameters not tested at temperature extremes for the entire temperature range.

6. HANDLING

MOS devices must be handled with certain precautions to avoid damage due to accumulation of static charge. Input protection devices have been designed in the chip to minimize the effect of this static buildup. However, the following handling practices are recommended :

- a) Devices should be handled on benches with conductive and grounded surfaces.
- b) Ground test equipment, tools and operator.
- c) Do not handle devices by the leads.
- d) Store devices in conductive foam or carriers.
- e) Avoid use of plastic, rubber, or silk in MOS areas.
- f) Maintain relative humidity above 50 percent if practical.

6.1. Package description


6.1.1. Package Parameters for the PC8240

The PC8240 uses a 35 mm x 35 mm, cavity down, 352 pin Tape Ball Grid Array (TBGA) package. The package parameters are as provided in the following list.

Package Outline	35 mm x 35 mm
Interconnects	352
Pitch	1.27mm
Solder Balls	63/37 Sn/Pb
Solder Ball Diameter	0.75 mm
Maximum Module Height	1.65 mm
Co-planarity Specification	0.15 mm
Maximum Force	6.0 lbs. total, uniformly distributed over package (8 grams/ball)

6.1.2. Pin Assignments and Package Dimensions

Figure 25 shows the top surface, side profile, and pinout of the PC8240, 352 TBGA package.

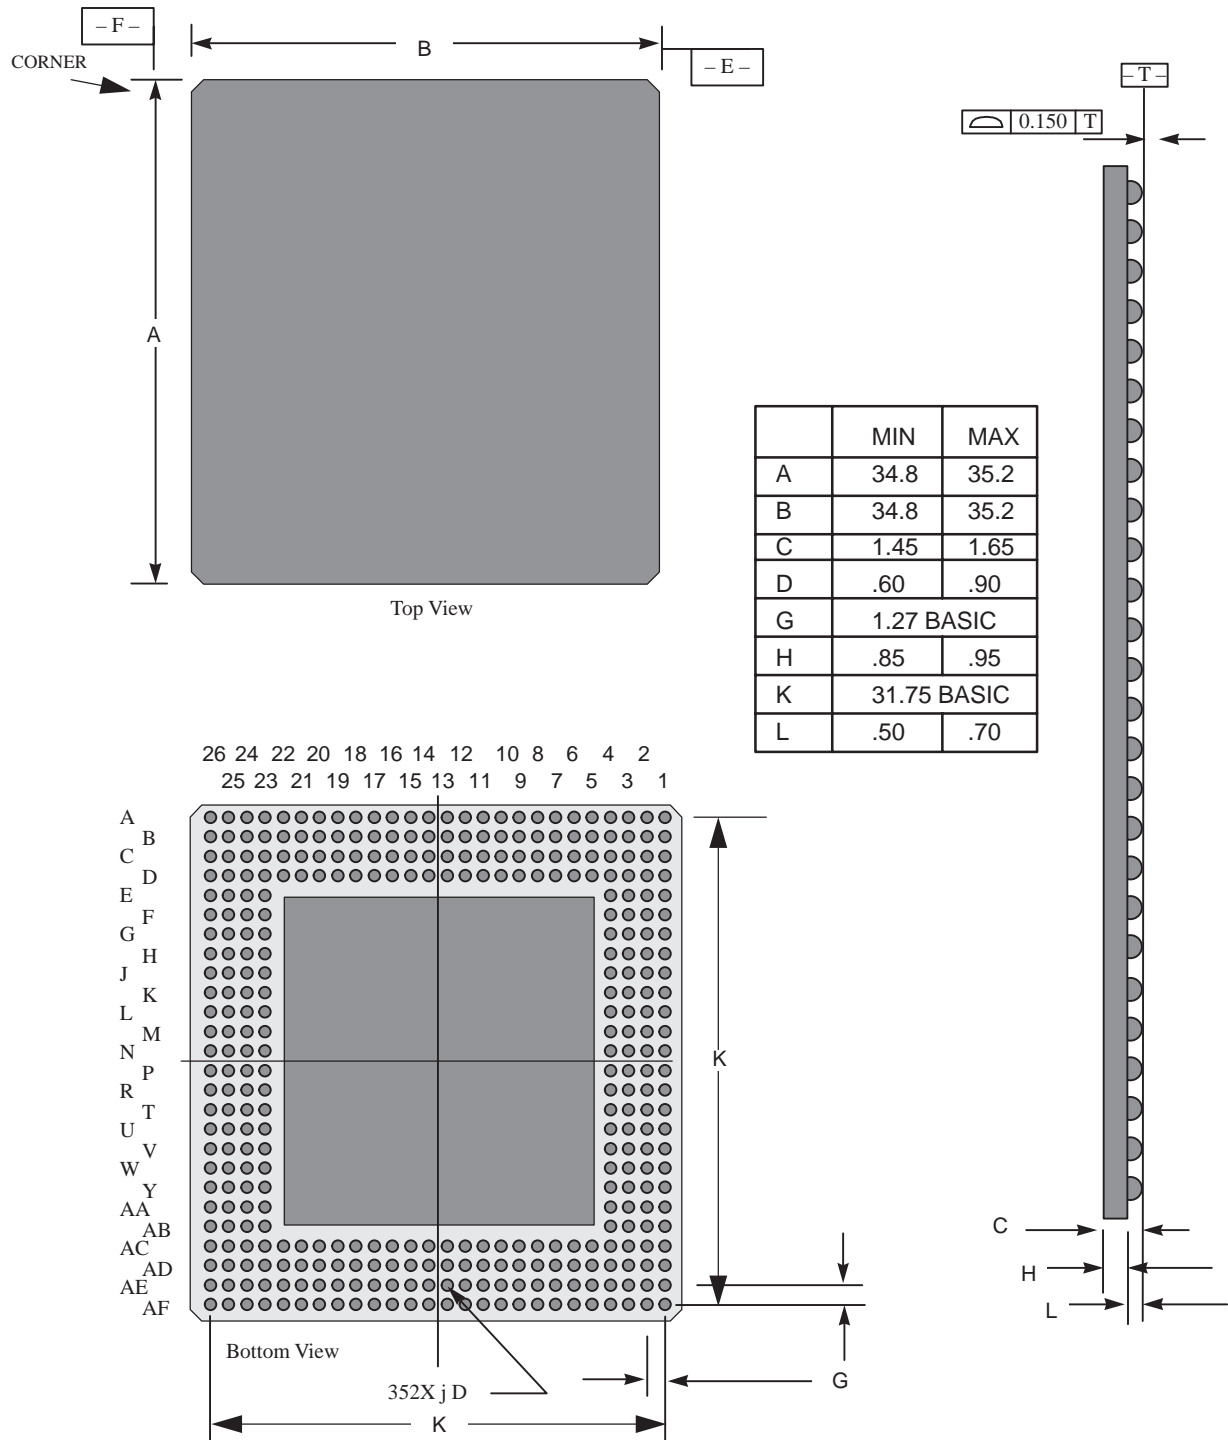

All measurements are in mm.

Notes:

- 1 Drawing not to scale.
- 2 All measurements are in millimeters (mm).

Figure 25: PC8240 Package Dimensions and Pinout Assignments

6.2. PLL Configuration

The PC8240's internal PLLs are configured by the PLL_CFG[0–4] signals. For a given PCI_SYNC_IN (PCI bus) frequency, the PLL configuration signals set both the Peripheral Logic/Memory Bus PLL (VCO) frequency of operation for the PCI-to-Memory frequency multiplying and the 603e CPU PLL (VCO) frequency of operation for Memory-to-CPU frequency multiplying. The PLL configurations for the PC8240 is shown in Table 18.

Table 18. PC8240 Microprocessor PLL Configuration

Ref	PLL_CFG [0–4] ^{1,3}	CPU ² HID1 [0–4]	250 MHz Part ⁹			200 MHz Part ⁹			Ratios ^{4,5}	
			PCI Clock Input (PCI_ SYNC_IN) Range ¹ (MHz)	Periph Logic/ Mem Bus Clock Range (MHz)	CPU Clock Range (MHz)	PCI Clock Input (PCI_ SYNC_IN) Range ¹ (MHz)	Periph Logic/ Mem Bus Clock Range (MHz)	CPU Clock Range (MHz)	PCI to Mem (Mem VCO) Multiplier	Mem to CPU (CPU VCO) Multiplier
0	00000	00110	25 – 33	75 – 100	188 – 250	25 – 26	75 – 80	188 – 200	3 (6)	2.5 (5)
1	00001	TBD	25 – 27	75 – 83	225 – 250	NOT USABLE			3 (6)	3 (6)
2	00010	TBD	50 – 56 ⁶	50 – 56	100 – 112	50 – 56 ⁶	50 – 56	100 – 112	1 (4)	2 (8)
3	00011	TBD	Bypass			Bypass			Bypass	2 (8)
4	00100	00101	25 – 28 ⁶	50 – 56	100 – 113	25 – 28 ⁶	50 – 56	100 – 113	2 (8)	2 (8)
5	00101	TBD	Bypass			Bypass			Bypass	2.5 (5)
7	00111	TBD	Bypass			Bypass			Bypass	3 (6)
8	01000	11000	33 ⁷ – 56 ⁶	33 – 56	100 – 168	33 ⁷ – 56 ⁶	33 – 56	100 – 168	1 (4)	3 (6)
A	01010	TBD	25 – 27	50 – 55	225 – 250	NOT USABLE			2 (4)	4.5 (9)
C	01100	00110	25 – 50	50 – 100	125 – 250	25 – 40	50 – 80	125 – 200	2 (4)	2.5 (5)
E	01110	11000	25 – 41	50 – 83	150 – 250	25 – 33	50 – 66	150 – 200	2 (4)	3 (6)
10	10000	00100	25 – 33	75 – 100	150 – 200	25 – 33	75 – 100	150 – 200	3 (6)	2 (4)
12	10010	00100	33 – 66	50 – 100	100 – 200	33 ⁸ – 66	50 – 100	100 – 200	1.5 (3)	2 (4)
14	10100	11110	25 – 35	50 – 71	175 – 250	25 – 28	50 – 56	175 – 200	2 (4)	3.5 (7)
16	10110	11010	25 – 31	50 – 62	200 – 250	25	50	200	2 (4)	4 (8)
18	11000	11000	25 – 33	62 – 83	186 – 250	25 – 26	62 – 65	186 – 200	2.5 (5)	3 (6)
1A	11010	11010	50 ⁸ – 62	50 – 62	200 – 250	50	50	200	1 (2)	4 (8)
1C	11100	11000	33 ⁸ – 55	50 – 83	150 – 250	3 – 44	50 – 66	150 – 200	1.5 (3)	3 (6)
1D	11101	00110	33 ⁸ – 66	50 – 100	125 – 250	33 ⁸ – 53	50 – 80	125 – 200	1.5 (3)	2.5 (5)
1E	11110	TBD	NOT USABLE						Off	Off
1F	11111	TBD	NOT USABLE						Off	Off

Notes:

- 1 Caution: The PCI_SYNC_IN frequency and PLL_CFG[0–4] settings must be chosen such that the resulting peripheral logic/memory bus frequency, CPU (core) frequency, and PLL (VCO) frequencies do not exceed their respective maximum or minimum operating frequencies shown in Table . Bold font numerical pairs indicate input range limit and limiting parameter.
- 2 The processor HID1 values only represent the multiplier of the processor's PLL (Memory to Processor Multiplier), thus multiple PC8240 PLL_CFG[0–4] values may have the same processor HID1 value. This implies that system software can not read the HID1 register and associate it with a unique PLL_CFG[0–4] value.
- 3 PLL_CFG[0–4] settings not listed (00110, 01001, 01011, 01101, 01111, 10001, 10011, 10101, 10111, 11001, and 11011) are reserved.
- 4 In PLL Bypass mode, the PCI_SYNC_IN input signal clocks the internal processor directly, the peripheral logic PLL is disabled, and the bus mode is set for 1:1 (PCI:Mem) mode operation. This mode is intended for factory use only. The AC timing specifications given in this document do not apply in PLL Bypass mode.
- 5 In Clock Off mode, no clocking occurs inside the PC8240 regardless of the PCI_SYNC_IN input.
- 6 Limited due to maximum memory VCO = 225 MHz.
- 7 Limited due to minimum CPU VCO = 200 MHz.
- 8 Limited due to minimum memory VCO = 100 MHz.
- 9 Range values are shown rounded down to the nearest whole number (decimal place accuracy removed) for clarity.

6.3. System Design Information

This section provides electrical and thermal design recommendations for successful application of the PC8240.

6.3.1. PLL Power Supply Filtering

The AVdd, AVdd2, and LAVdd power signals are provided on the PC8240 to provide power to the peripheral logic/memory bus PLL, the 603e processor PLL, and the SDRAM clock delay-locked loop (DLL), respectively. To ensure stability of the internal clocks, the power supplied to the AVdd, AVdd2, and LAVdd input signals should be filtered of any noise in the 500kHz to 10MHz resonant frequency range of the PLLs. A separate circuit similar to the one shown in Figure 26 using surface mount capacitors with minimum effective series inductance (ESL) is recommended for each of the AVdd, AVdd2, and LAVdd power signal pins. Consistent with the recommendations of Dr. Howard Johnson in *High Speed Digital Design: A Handbook of Black Magic* (Prentice Hall, 1993), multiple small capacitors of equal value are recommended over using multiple values.

The circuits should be placed as close as possible to the respective input signal pins to minimize noise coupled from nearby circuits. Routing directly as possible from the capacitors to the input signal pins with minimal inductance of vias is important but proportionately less critical for the LAVdd pin.

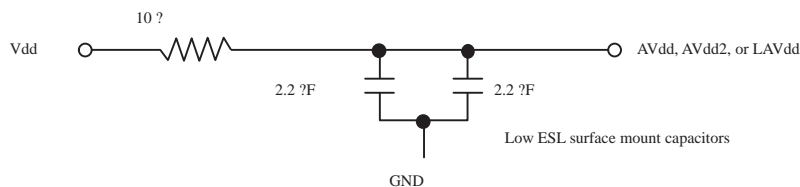


Figure 26: PLL Power Supply Filter Circuit

6.3.2. Power Supply Voltage Sequencing

The notes in Table contain cautions illustrated in about the sequencing of the external bus voltages and internal voltages of the PC8240. These cautions are necessary for the long term reliability of the part. If they are violated, the electrostatic discharge (ESD) protection diodes will be forward biased and excessive current can flow through these diodes. Figure 27 shows a typical ramping voltage sequence where the DC power sources (voltage regulators and/or power supplies) are connected as shown in Figure 27. The voltage regulator delay shown in can be zero if the various DC voltage levels are all applied to the target board at the same time. The ramping voltage sequence shows a scenario in which the Vdd/AVdd/AVdd2/LAVdd power plane is not loaded as much as the OVdd/GVdd power plane and thus Vdd/AVdd/AVdd2/LAVdd ramps at a faster rate than OVdd/GVdd.

If the system power supply design does not control the voltage sequencing, the circuit of Figure 27 can be added to meet these requirements. The MUR420 diodes of Figure 27 control the maximum potential difference between the 3.3 bus and internal voltages on power-up and the 1N5820 Schottky diodes regulate the maximum potential difference on power-down.

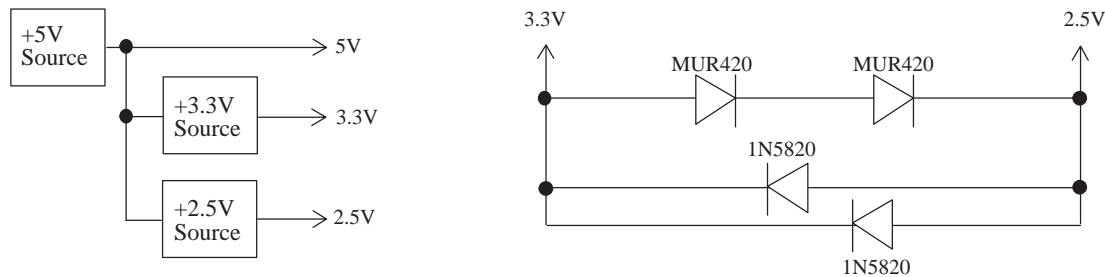


Figure 27: Example Voltage Sequencing Circuits

6.3.3. Power Supply Sizing

The power consumption numbers provided in Table do not reflect power from the OVdd and GVdd power supplies which are non-negligible for the PC8240. In typical application measurements, the OVdd power ranged from 200 to 600 mW and the GVdd power ranged from 300 to 900 mW. The ranges' low end power numbers were results of the PC8240 performing cache resident integer operations at the slowest frequency combination of 33:66:166 (PCI:Mem:CPU) MHz. The OVdd high end range's value resulted from the PC8240 performing continuous flushes of cache lines with alternating ones and zeroes to PCI memory. The GVdd high end range's value resulted from the PC8240 operating at the fastest frequency combination of 66:100:250 (PCI:Mem:CPU) MHz and performing continuous flushes of cache lines with alternating ones and zeroes on 64 bit boundaries to local memory.

6.3.4. Decoupling Recommendations

Due to the PC8240's dynamic power management feature, large address and data buses, and high operating frequencies, the PC8240 can generate transient power surges and high frequency noise in its power supply, especially while driving large capacitive loads. This noise must be prevented from reaching other components in the PC8240 system, and the PC8240 itself requires a clean, tightly regulated source of power. Therefore, it is recommended that the system designer place at least one decoupling capacitor at each Vdd, OVdd, GVdd, and LVdd pin of the PC8240. It is also recommended that these decoupling capacitors receive their power from separate Vdd, OVdd, GVdd, and GND power planes in the PCB, utilizing short traces to minimize inductance. These capacitors should have a value of 0.1 F. Only ceramic SMT (surface mount technology) capacitors should be used to minimize lead inductance, preferably 0508 or 0603, oriented such that connections are made along the length of the part.

In addition, it is recommended that there be several bulk storage capacitors distributed around the PCB, feeding the Vdd, OVdd, GVdd, and LVdd planes, to enable quick recharging of the smaller chip capacitors. These bulk capacitors should have a low ESR (equivalent series resistance) rating to ensure the quick response time necessary. They should also be connected to the power and ground planes through two vias to minimize inductance. Suggested bulk capacitors—100–330 F (AVX TPS tantalum or Sanyo OSCON).

6.3.5. Connection Recommendations

To ensure reliable operation, it is highly recommended to connect unused inputs to an appropriate signal level. Unused active low inputs should be tied to OVdd. Unused active high inputs should be connected to GND. All NC (no-connect) signals must remain unconnected.

Power and ground connections must be made to all external Vdd, OVdd, GVdd, LVdd and GND pins of the PC8240.

The PCI_SYNC_OUT signal is intended to be routed halfway out to the PCI devices and then returned to the PCI_SYNC_IN input of the PC8240.

The SDRAM_SYNC_OUT signal is intended to be routed halfway out to the SDRAM devices and then returned to the SDRAM_SYNC_IN input of the PC8240. The trace length may be used to skew or adjust the timing window as needed. See Motorola application note AN1794/D for more information on this topic.

6.3.6. Pull-up/Pull-down Resistor Requirements

The data bus input receivers are normally turned off when no read operation is in progress; therefore, they do not require pull-up resistors on the bus. The data bus signals are: $\overline{DH}[0-31]$, $\overline{DL}[0-31]$, and $\overline{PAR}[0-7]$.

If the 32-bit data bus mode is selected, the input receivers of the unused data and parity bits ($\overline{DL}[0-31]$, and $\overline{PAR}[4-7]$) will be disabled, and their outputs will drive logic zeros when they would otherwise normally be driven. For this mode, these pins do not require pull-up resistors, and should be left unconnected by the system to minimize possible output switching.

The $\overline{TEST}[0-1]$ pins require pull-up resistors of 120 Ohms or less connected to OVdd.

It is recommended that $\overline{TEST2}$ have weak pull-up resistor (2K – 10K Ohms) connected to GVdd.

It is recommended that the following signals be pulled up to OVdd with weak pull-up resistors (2K – 10K Ohms): \overline{SDA} , \overline{SCL} , \overline{SMI} , \overline{SRESET} , \overline{TBEN} , $\overline{CHKSTOP_IN}$, $\overline{TEST3}$, and $\overline{TEST4}$.

It is recommended that the following PCI control signals be pulled up to LVdd with weak pull-up resistors (2K – 10K Ohms): \overline{DEVSEL} , \overline{FRAME} , \overline{IRDY} , \overline{LOCK} , \overline{PERR} , \overline{SERR} , \overline{STOP} , and \overline{TRDY} . The resistor values may need to be adjusted stronger to reduce induced noise on specific board designs.

The following pins have internal pull-up resistors enabled at all times: $\overline{REQ}[0-3]$, $\overline{REQ4/DA4}$, \overline{TCK} , \overline{TDI} , \overline{TMS} , and \overline{TRST} . See Table . PC8240 Pinout Listing for more information.

The following pins have internal pull-up resistors enabled only while device is in the reset state: $\overline{GNT4/DA5}$, $\overline{DL0}$, \overline{FOE} , $\overline{RCS0}$, \overline{SDRAS} , \overline{SDCAS} , \overline{CKE} , \overline{AS} , \overline{MCP} , $\overline{MAA}[0-2]$, $\overline{PMAA}[0-2]$. See Table . PC8240 Pinout Listing for more information.

The following pins are reset configuration pins: $\overline{GNT4/DA5}$, $\overline{DL0}$, \overline{FOE} , $\overline{RCS0}$, \overline{CKE} , \overline{AS} , \overline{MCP} , $\overline{QACK/DA0}$, $\overline{MAA}[0-2]$, $\overline{PMAA}[0-2]$, and $\overline{PLL_CFG}[0-4/DA[10-6]$. These pins are sampled during reset to configure the device.

Reset configuration pins should be tied to GND via 1K Ohm pull-down resistors to insure a logic zero level is read into the configuration bits during reset if the default logic one level is not desired.


Any other unused active low input pins should be tied to a logic one level via weak pull-up resistors (2K – 10K Ohms) to the appropriate power supply listed in . Unused active high input pins should be tied to GND via weak pull-down resistors (2K – 10K Ohms).

6.3.7. JTAG Configuration Signals

Boundary scan testing is enabled through the JTAG interface signals. (BSDL descriptions of the PC8240 are available on the internet at www.mot.com/SPS/PowerPC/teksupport/tools/BSDL/) The \overline{TRST} signal is optional in the IEEE 1149.1 specification but is provided on all PowerPC implementations. While it is possible to force the TAP controller to the reset state using only the \overline{TCK} and \overline{TMS} signals, more reliable power-on reset performance will be obtained if the \overline{TRST} signal is asserted during power-on reset. Since the JTAG interface is also used for accessing the common on-chip processor (COP) function of PowerPC processors, simply tying \overline{TRST} to $\overline{HRST_CPU/HRST_CTRL}$ is not practical. Note that the two hard reset signals on the PC8240 ($\overline{HRST_CPU}$ and $\overline{HRST_CTRL}$) must be asserted and negated together to guarantee normal operation.

The common on-chip processor (COP) function of PowerPC processors allows a remote computer system (typically a PC with dedicated hardware and debugging software) to access and control the internal operations of the processor. The COP interface connects primarily through the JTAG port of the processor, with some additional status monitoring signals. The COP port requires the ability to independently assert $\overline{HRST_CPU/HRST_CTRL}$ or \overline{TRST} in order to fully control the processor. If the target system has independent reset sources, such as voltage monitors, watchdog timers, power supply failures, or push-button switches, then the COP reset signals must be merged into these signals with logic.

The arrangement shown in allows the COP to independently assert $\overline{HRST_CPU/HRST_CTRL}$ or \overline{TRST} while insuring that the target can drive $\overline{HRST_CPU/HRST_CTRL}$ as well. The COP header shown, adds many benefits including breakpoints, watchpoints, register and memory examination/modification and other standard debugger features are possible through this interface. Availability of these features can be as inexpensive as an unpopulated footprint for a header to be added when needed.

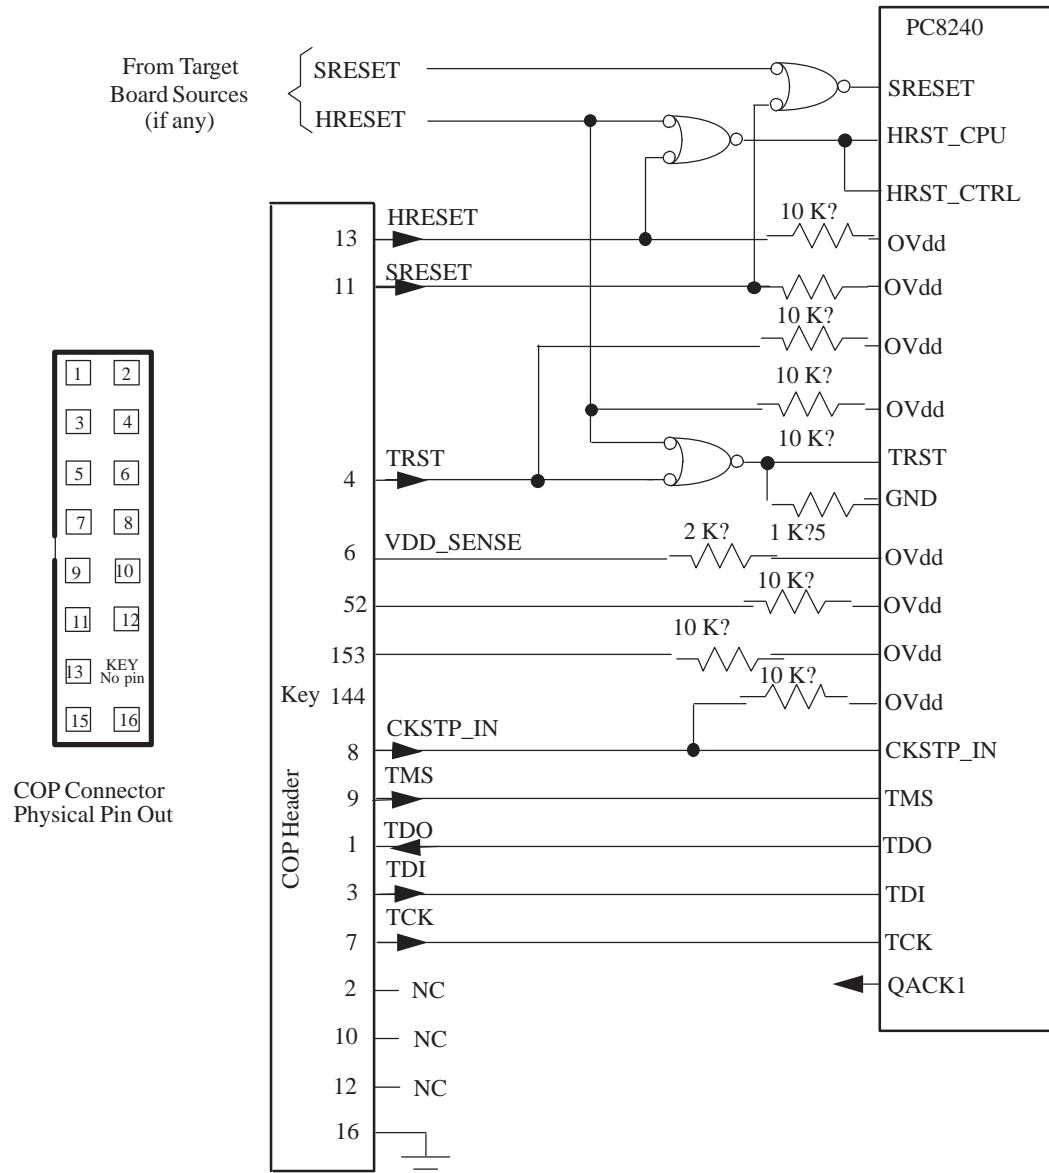**Notes:**

- 1 QACK is an output on the PC8240 and is not required at the COP header for emulation.
- 2 RUN/STOP normally found on pin 5 of the COP header is not implemented on the PC8240. Connect pin 5 of the COP header to OVdd with a 10 K pull-up resistor.
- 3 CKSTP_OUT normally found on pin 15 of the COP header is not implemented on the PC8240. Connect pin 15 of the COP header to OVdd with a 10 K pull-up resistor.
- 4 Pin 14 is not physically present on the COP header.
- 5 Component not populated.

Figure 28: COP Connector Diagram

The COP interface has a standard header for connection to the target system, based on the 0.025" square-post 0.100" centered header assembly (often called a "Berg" header). The connector typically has pin 14 removed as a connector key, as shown in .

There is no standardized way to number the COP header shown in Figure 28 ; consequently, many different pin numbers have been observed from emulator vendors. Some are numbered top-to-bottom then left-to-right, while others use left-to-right then top-to-bottom, while still others number the pins counter clockwise from pin one (as with an IC). Regardless of the numbering, the signal placement recommended in is common to all known emulators.

7. DEFINITIONS

Datasheet status		Validity
Objective specification	This datasheet contains target and goal specification for discussion with customer and application validation.	Before design phase.
Target specification	This datasheet contains target or goal specification for product development.	Valid during the design phase.
Preliminary specification \propto site	This datasheet contains preliminary data. Additional data may be published later ; could include simulation result.	Valid before characterization phase.
Preliminary specification β site	This datasheet contains also characterization results.	Valid before the industrialization phase.
Product specification	This datasheet contains final product specification.	Valid for production purpose.
Limiting values		
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.		
Application information		
Where application information is given, it is advisory and does not form part of the specification.		


LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. ATMEL-GRENOBLE customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify ATMEL-GRENOBLE for any damages resulting from such improper use or sale.

8. DIFFERENCES WITH COMMERCIAL PART

	Commercial part	Military part
Temperature range	$T_j = 0$ to 105°C	$T_c = -55$ to 125°C
Power consumption		use a 1.25 factor to calculate at low temperature (-55°C)
Spec 13a (output hold)	1 ns	0.5 ns

9. ORDERING INFORMATION

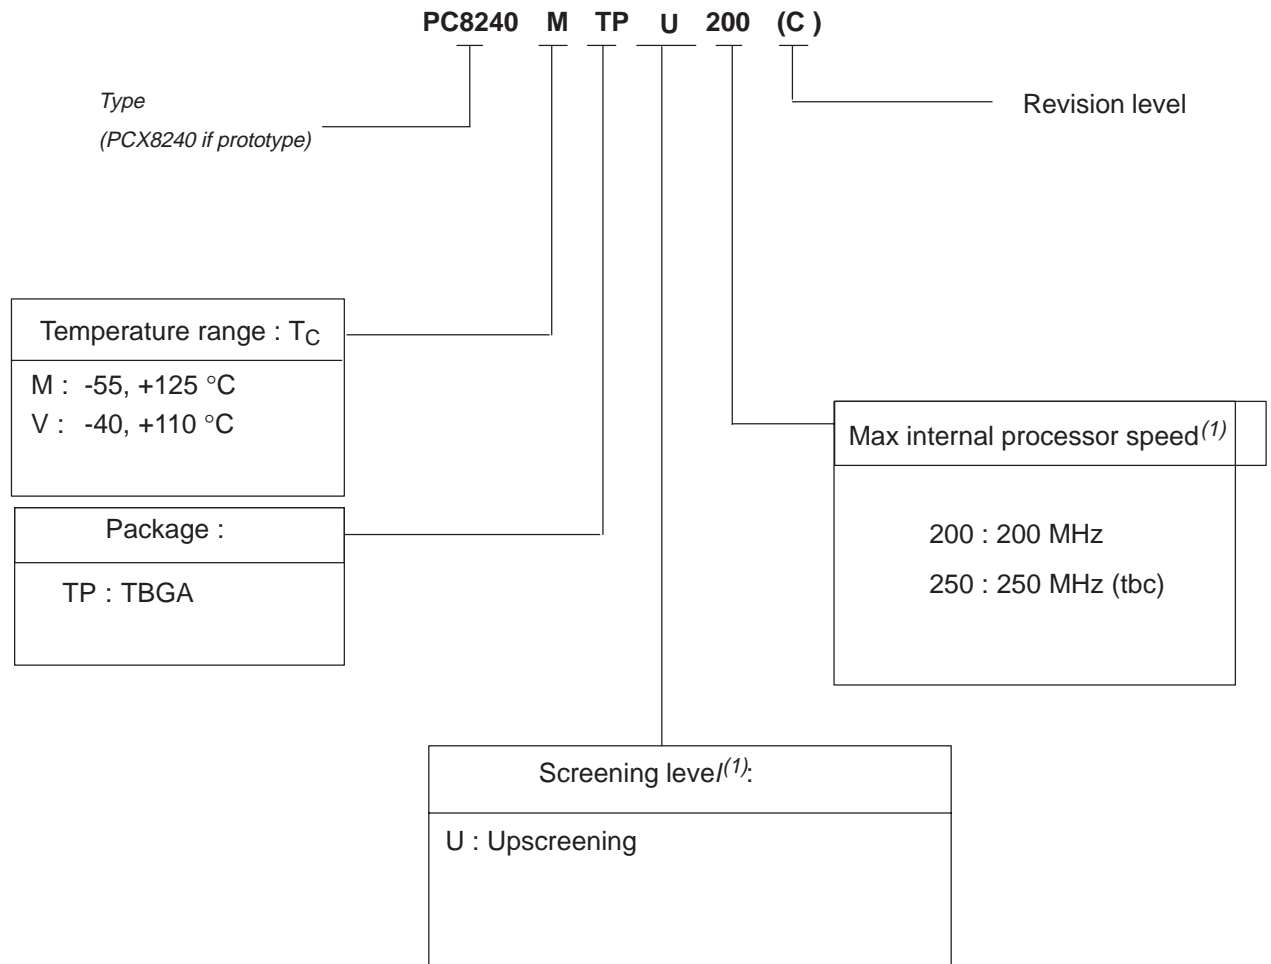

(1) For availability of the different versions, contact your ATMEL sale office

Information furnished is believed to be accurate and reliable. However Atmel-Grenoble assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Atmel-Grenoble. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. Atmel-Grenoble products are not authorized for use as critical components in life support devices or systems without express written approval from Atmel-Grenoble.

© 2000 Atmel-Grenoble- Printed in France - All rights reserved.

This product is manufactured by Atmel-Grenoble- 38521 SAINT-EGREVE - FRANCE.

For further information please contact :

Atmel-Grenoble - Route Départementale 128 - B.P. 46 - 91401 ORSAY Cedex - FRANCE -

Phone +33 (0)1 69 33 00 00 - Fax +33 (0)1 69 33 03 21.

Internet: <http://www.atmel-grenoble.com>



