


# PX1014A 82.0 MHz SAW Filter



## PRELIMINARY

- Designed for TDMA, CDPD, & CATV Narrow-Band Data
- Low Insertion Loss
- Excellent Selectivity
- Hermetic 13.3 x 6.5 mm Surface-Mount Case
- Unbalanced Input and Output



 See Associated Plots

Characteristic	Sym	Min	Typ	Max	Units	Notes
Nominal Center Frequency	fc	82.000			MHz	1
Passband	Insertion Loss at fc	IL	3	5.0	dB	1, 2
	3 dB Passband	BW <sub>3</sub>	±15	±25	kHz	
	Amplitude Ripple over fc ±15 kHz			1.0	dB <sub>P-P</sub>	
	Group Delay Variation over fc ±15 kHz	GDV	3.5	10.0	µs <sub>P-P</sub>	
Rejection	fc -120 to -60 kHz and fc +60 to +120 kHz		15	50	dB	1, 2, 3
	fc -400 to -120 kHz and fc +120 to +400 kHz		35	60		
	fc -40 to -0.4 MHz and fc +0.4 to +40 MHz		52	55		
Operating Temperature Range	T <sub>A</sub>	-30		+75	°C	1

Impedance Matching to 50 Ω unbalanced	External L-C
Case Style	SM13365-12 13.3 x 6.5 mm Nominal Footprint
Lid Symbolization (YY = year, WW = week) See note 4	RFM PX1014A YYWW

### Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Max Soldering Profile	265°C for 10 s	

### Electrical Connections

Connection	Terminals
Port 1 Hot	2
Port 1 Gnd Return	3
Port 2 Hot	8
Port 2 Gnd Return	9
Case Ground	All others

#### Notes:

1. Unless noted otherwise, all specifications apply *over the operating temperature range* with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
9. ©Copyright 1999, RF Monolithics Inc.
10. Electrostatic Sensitive Device. Observe precautions for handling.





**RF Monolithics, Inc.**  
4347 Sigma Road  
Dallas, Texas 75244  
USA

Phone: +1(972)233-2903  
Fax: +1(972)387-8148  
e-mail: [info@rfm.com](mailto:info@rfm.com)  
Home page: [www.rfm.com](http://www.rfm.com)

**European Sales Office**

# PX1014A 82 MHz SAW Filter

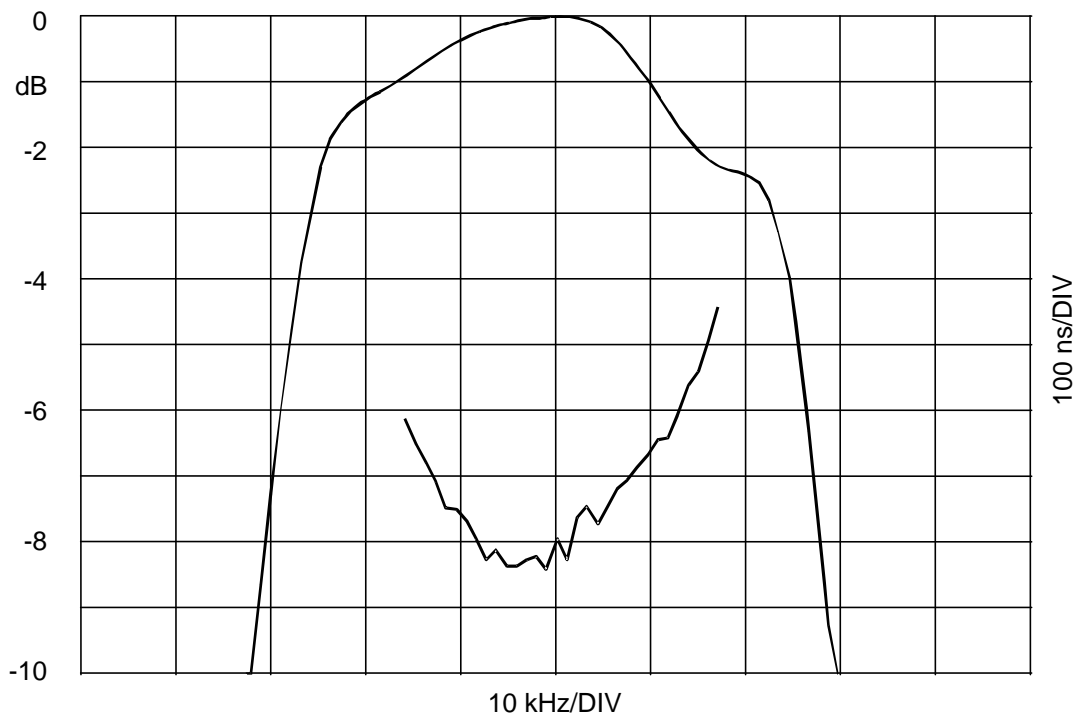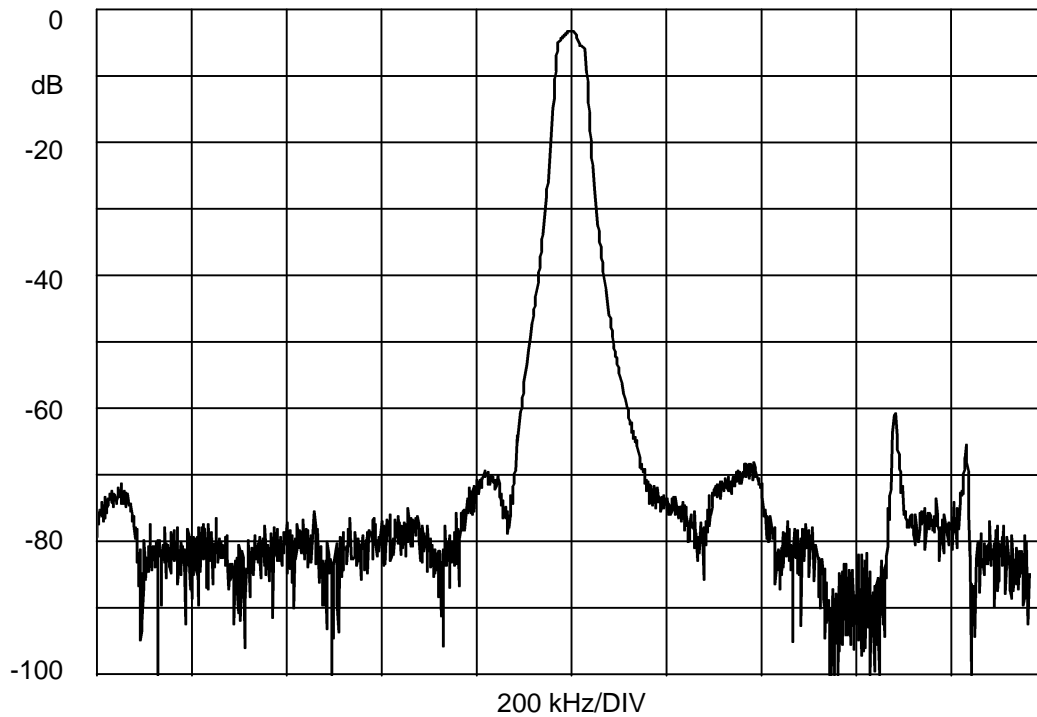


**RF Monolithics, Inc.**  
4347 Sigma Road  
Dallas, Texas 75244  
USA

Phone: +1(972)233-2903  
Fax: +1(972)387-8148  
e-mail: [info@rfm.com](mailto:info@rfm.com)  
Home page: [www.rfm.com](http://www.rfm.com)

**European Sales Office**

## 12-Terminal Ceramic Surface-Mount Case 13.3 x 6.5 mm Nominal Footprint



### Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	13.08	13.31	13.60	0.515	0.524	0.535
B	6.27	6.50	6.80	0.247	0.256	0.268
C		1.91	2.00		0.075	0.079
D		1.50			0.059	
E		0.79			0.031	
H		1.0			0.039	
P		2.54			0.100	

### Electrical Connections

Connection		Terminals
Port 1	Input or Return	2
	Return or Input	3
Port 2	Output or Return	8
	Return or Output	9
Ground		All others
Single Ended Operation		Return is ground
Differential Operation		Return is hot

