



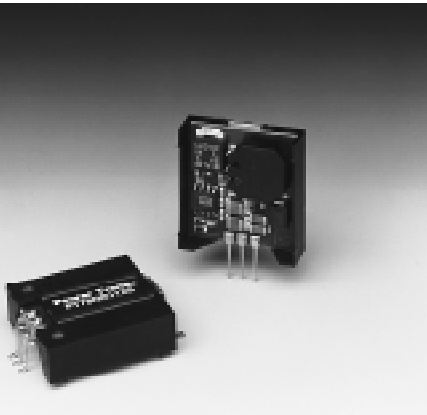

- Negative output from positive input
- Wide Input Range
- Self-Contained Inductor
- Short Circuit Protection
- Over-Temperature Protection
- Fast Transient Response


The PT78NR100 Series creates a negative output voltage from a positive input voltage greater than 7V. These easy-to-use, 3-terminal, Integrated Switching Regulators (ISRs) have maximum output power of 5 watts and a negative output voltage that is laser trimmed. They also have excellent line and load regulation.

Standard Application

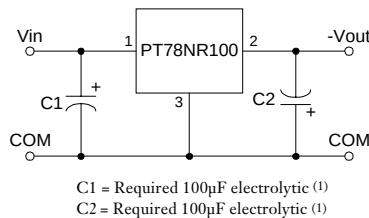

Pin-Out Information

Pin	Function
1	+V _{in}
2	-V _{out}
3	GND



Ordering Information

PT78NR1XX Y

Output Voltage

03 = -3.0 Volts
05 = -5.0 Volts
52 = -5.2 Volts
06 = -6.0 Volts
07 = -7.0 Volts
08 = -8.0 Volts
09 = -9.0 Volts
10 = -10.0 Volts
12 = -12.0 Volts
14 = -13.9 Volts
15 = -15.0 Volts

Package Suffix

V = Vertical Mount
S = Surface Mount
H = Horizontal Mount

Specifications

Characteristics (T _a = 25°C unless noted)	Symbols	Conditions	PT78NR100 SERIES			Units
			Min	Typ	Max	
Output Current	I _O	Over V _{in} range V _O = -5V V _O = -6V V _O = -7, -8, -9V V _O = -10V V _O = -12V V _O = -13.9, -15V	0.05 (2) 0.05 (2) 0.05 (2) 0.05 (2) 0.05 (2) 0.05 (2)	— — — — — —	1.00 0.8 0.55 0.5 0.40 0.30	A
Short Circuit Current	I _{sc}	V _{in} = 10V	—	4 × I _{max}	—	A _{pk}
Inrush Current	I _{ir} t _{ir}	V _{in} = 10V On start-up	— —	4 0.5	—	A mSec
Input Voltage Range	V _{in}	0.1 ≤ I _O ≤ I _{max} V _O = -5V V _O = -6, -7, -8, -9V V _O = -10, -12V V _O = -13.9, -15V	7 7 7 7	— — — —	25 21 18 15	V V V V
Output Voltage Tolerance	ΔV _O	Over V _{in} range T _a = -20°C to +70°C	—	±1.0	±3.0	%V _O
Line Regulation	Reg _{line}	Over V _{in} range	—	±0.5	±1.0	%V _O
Load Regulation	Reg _{load}	0.1 ≤ I _O ≤ I _{max}	—	±0.5	±1.0	%V _O
V _O Ripple/Noise	V _n	V _{in} = 10V, I _O = I _{max}	—	±2	—	%V _O
Transient Response (with 100µF output cap)	t _{tr}	50% load change V _O over/undershoot	— —	100 5.0	250 —	µSec %V _O
Efficiency	η	V _{in} = 10V, I _O = 0.5 × I _{max} , V _O = -5V	—	75	—	%
Switching Frequency	f _O	Over V _{in} and I _O ranges	600	650	700	kHz
Absolute Maximum Operating Temperature Range	T _a	Free Air Convection, (40-60LFM) Over V _{in} Range	-40	—	+85 (3)	°C
Thermal Resistance	θ _{ja}	Free Air Convection, (40-60LFM)	—	45	—	°C/W
Storage Temperature	T _s	—	-40	—	+125	°C
Mechanical Shock	—	Per Mil-STD-883D, Method 2002.3	—	500	—	G's
Mechanical Vibration	—	Per Mil-STD-883D, Method 2007.2, 20-2000 Hz, soldered in a PC board	—	5	—	G's
Weight	—	—	—	6.5	—	Grams

Notes: (1) The PT78NR100 Series requires a 100µF electrolytic or tantalum capacitor at both the input and output for proper operation in all applications. The input capacitor, C1, must have a ripple current rating ≥600 mA_{rms}, and an ESR ≤0.2Ω.


(2) The ISR will operate down to no load with reduced specifications.

(3) See Thermal Derating chart.



1 Amp Plus to Minus Voltage
Integrated Switching Regulator

PT78NR105 -5.0 VDC (See Note A)


Efficiency vs Output Current

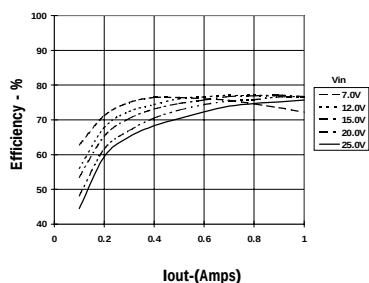

Ripple vs Output Current

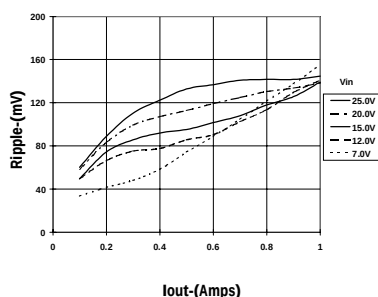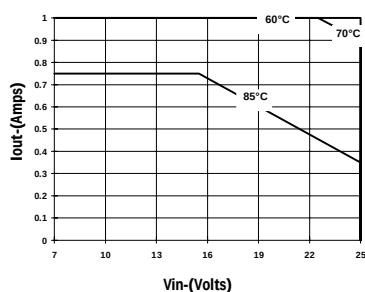
Thermal Derating (T_a) (See Note B)

Power Dissipation vs Output Current


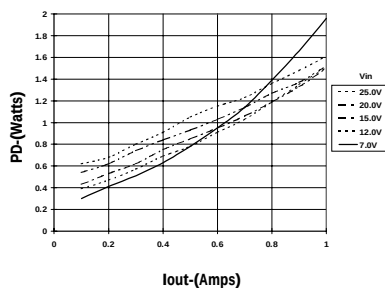


PT78NR109 -9.0 VDC (See Note A)


Efficiency vs Output Current

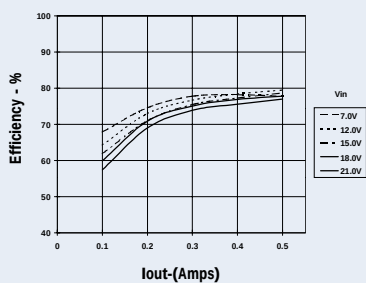

Ripple vs Output Current

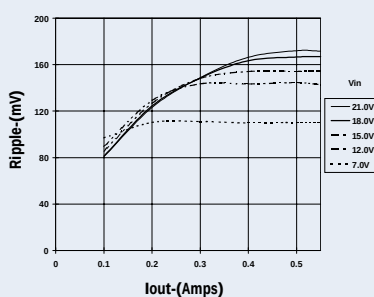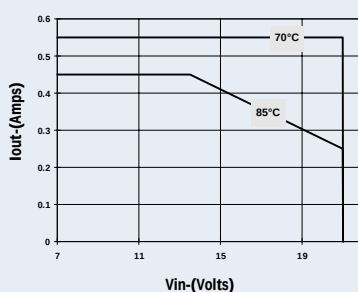
Thermal Derating (T_a) (See Note B)

Power Dissipation vs Output Current


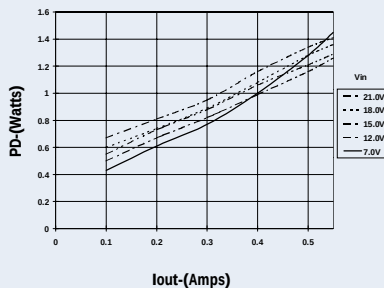


PT78NR112 -12.0 VDC (See Note A)


Efficiency vs Output Current

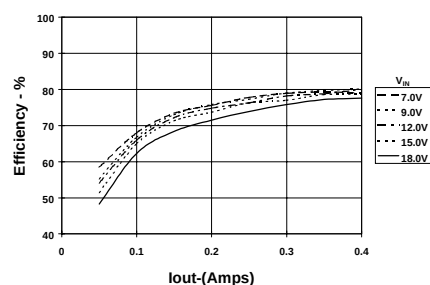

Ripple vs Output Current

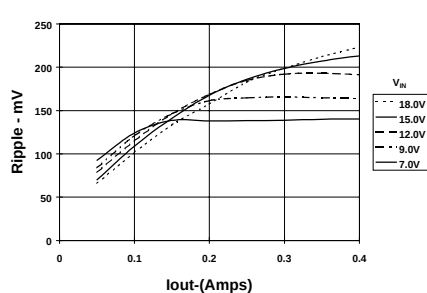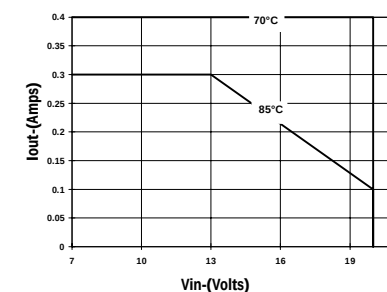Thermal Derating (T_a) (See Note B)

Power Dissipation vs Output Current

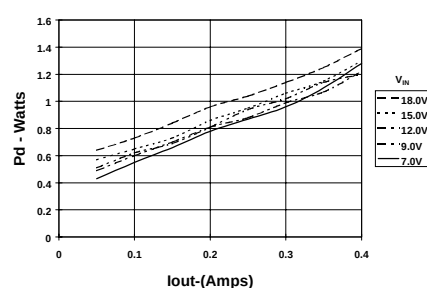

Note A: All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.

Note B: Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.