

40 PIN SMD ETHERNET 10/100 BASE QUAD PORT TRANSFORMER

PN:40ST1025L DATA SHEET


A. GENERAL SPECIFICATIONS

1. IEEE 802.3 ETHERNET COMPATIBLE, 100 BASE-TX
2. SURFACE MOUNTABLE
3. DESIGN FOR MULTI PORT REPEATER AND ETHERNET SWITCHING HUB APPLICATION
4. CUSTOMER DESIGNS AVAILABLE FOR SPECIFIC APPLICATION
5. OPERATING TEMP RANGE: 0°C TO 100°C.

B. ELECTRICAL SPECIFICATIONS@25°C

1. ISOLATION HI-POT: 1500 Vrms(PRI./SEC.)
2. TURN RATIO (+/- 5%): TX=1.25CT: 1CT, RX=1:1
3. RISE TIME: 2.5 ns TYP
4. CW/W: 25pF MAX
5. LEAKAGE INDUCTANCE (1MHz): 0.6uH Max
6. CMRR (0.1-100 MHz): -37dB MIN
7. RETURN LOSS (: MIN) 5-30 MHz 30-60 MHz 60-80 MHz
-16dB -12dB -10 dB
8. CROSSTALKS (0.1 TO 100MHz): -38dB Min
9. OCL (uH,Min):350 uH, at 8mA DC FORM 0-70°C
10. DCR: 0.9 Ω Max
11. INSERTION LOSS (1MHz-100MHz): -1.1dB Max

C. SCHEMATIC & DIMENSIONS & MARKING (UNI mm):

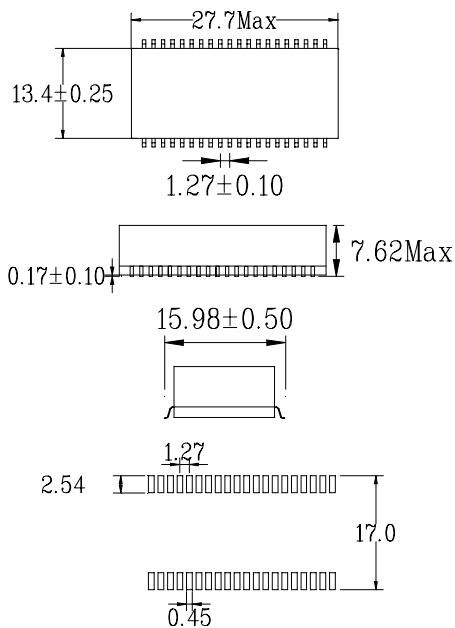

Suggest pad layout

TOLERANCE: ±0.25



PIN 1 DOT

TX PIN 1-15 NO CIRCUIT
PIN 26-40 NO CIRCUIT

