SPECIFICATIONS:


IND: 10KHz, .1V (6-2) 4mH MIN

DCR: (6-2), (3-5) 1.2O MAX

LONG BAL: 40dB MIN @ 4KHz (6-2) or (3-5) 1 & 4 GROUNDED

HIPOT: 1000 VDC w-w, w-c

TURNS RATION: (6-2):(3-5) = 1 ct : 1 ct

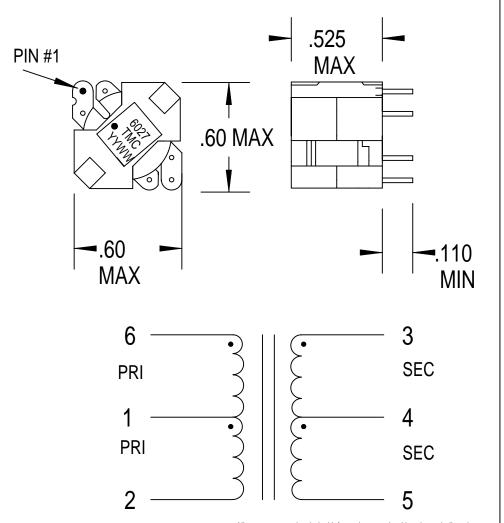

All statements and technical information contained herein are believed to be accurate, but the accuracy and completeness thereof is not guaranteed. All trademarks and trade names are the property of their respective holders. © 1999 Tracy Minntronix Corporation

TRACY MINNTRONIX

1045 CRAIG AVE. TRACY, MN 56175

T1 TRANSFORMER - R	CV
--------------------	----

CATALOG

1 OF 1

TEMP CLASS 130 °C

TOLERANCES

UNLESS OTHERWISE NOTED

2 PLACES 3 PLACES ANGLE ±.03 ±.010 ±1°