

PC912L0NSZ

High Speed Response , High CMR *OPIC Photocoupler

■ Features

1. High speed response. (Data transfer rate:25Mbps)
2. High resistance to noise due to high common rejection voltage. (CMR:MIN. 20kV/ μ s)
3. Isolation voltage between input and output. ($V_{iso(rms)}$:5.0kV)
4. 8-pin DIP package.

■ Applications

1. FA equipment.

■ Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)


Parameter		Symbol	Rating	Unit
Input	Supply voltage	V _{CC1}	0 to 5.5	V
	Input voltage	V _{IN}	-0.5 to V _{CC1} +0.5	V
Output	Supply voltage	V _{CC2}	0 to 5.5	V
	High level output voltage	V _O	-0.5 to V _{CC2} +0.5	V
	Low level output current	I _O	10	mA
*1 Isolation voltage		V _{iso (rms)}	5.0	kV
Operating temperature		T _{opr}	-40 to +85	°C
Storage temperature		T _{stg}	-55 to +125	°C
*2 Soldering temperature		T _{sol}	270	°C

*1 40 to 60%RH, AC for 1min

*2 For 10s

■ Outline Dimensions

(Unit : mm)

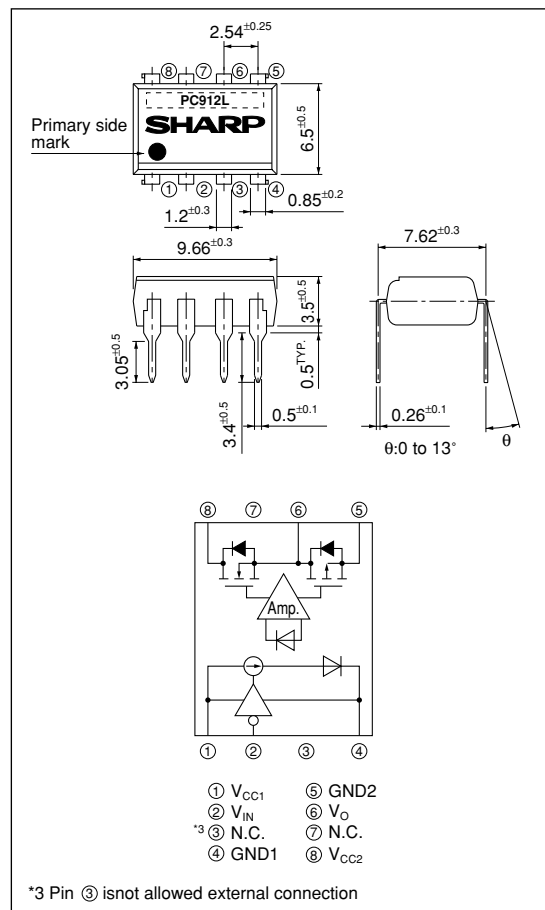

* "OPIC" (Optical IC) is a trademark of the SHARP Corporation.
An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

■ Electro-optical Characteristics

(Unless otherwise specified, $T_a=T_{opr}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Low level supply current	I_{CC1L}	$V_{IN}=0V$	—	6.0	10.0	mA
	High level supply current	I_{CC1H}	$V_{IN}=V_{CC1}$	—	1.5	3.0	mA
	Input current	I_{IN}	—	−10	—	10	μA
Output	High level supply current	I_{CC2H}	—	—	7.0	9.0	mA
	Low level supply current	I_{CC2L}	—	—	5.5	9.0	mA
	High level output voltage	V_{OH}	$I_O=-20\mu A, V_{IN}=V_{IH}$	4.4	5.0	—	V
			$I_O=-4mA, V_{IN}=V_{IH}$	4.0	4.8	—	V
	Low level output voltage	V_{OL}	$I_O=20\mu A, V_{IN}=V_{IL}$	—	0	0.1	V
			$I_O=400\mu A, V_{IN}=V_{IL}$	—	—	0.1	V
			$I_O=4mA, V_{IN}=V_{IL}$	—	0.5	1.0	V
Transfer characteristics	Isolation resistance	R_{ISO}	DC=500V, 40 to 60%RH	5×10^{10}	10^{11}	—	Ω
	Response time	"High→Low" propagation delay time	$V_{CC1}=V_{CC2}=5V$ $C_L=15pF$, CMOS Logic level $V_{IN}=0 \rightarrow 5V$ $t_r=t_f < 1ns$ Pulse width 40ns Duty 50%	—	20	40	ns
		"Low→High" propagation delay time		—	23	40	ns
		Pulse width distortion $ t_{pHL}-t_{pLH} $		—	—	6	ns
		Propagation delay time		—	—	20	ns
		Data transfer rate		—	—	25	Mbps
		Rise time		—	9	—	ns
		Fall time		—	8	—	ns
	Instantaneous common mode rejection voltage "Output : High level"	CM_H	$V_{IN}=V_{CC1}, V_O > 0.8 \times V_{CC1}$ $V_{CM}=1kV$	20	—	—	kV/μs
	Instantaneous common mode rejection voltage "Output : Low level"	CM_L	$V_{IN}=0, V_O > 0.8$ $V_{CM}=1kV$	−20	—	—	kV/μs

When measuring output and transfer characteristics, connect a by-pass capacitor (0.1μF or more) between V_{CC1} ① and GND₁ ④, between V_{CC2} ⑧ and GND₂ ⑤ near the **PC912L0NSZ**

Pulse width distortion $\Delta t_w = |t_{pHL} - t_{pLH}|$

All typical values: at $T_a=25^\circ C$, $V_{CC1}=V_{CC2}=5V$

■ Recommended Operating Conditions ($T_a=25^\circ C$)

Parameter	Symbol	MIN.	MAX.	Unit
Supply voltage	V_{CC1}	4.5	5.5	V
Supply voltage	V_{CC2}	4.5	5.5	V
High level input voltage	V_{IH}	2.0	V_{CC1}	V
Low level input voltage	V_{IL}	0.0	0.8	V
Operating temperature	T_{opr}	−40	+85	°C

Fig.1 Truth Table

Input	LED	Output
H	OFF	H
L	ON	L

L: Logic (0)

H: Logic (1)

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- Contact a SHARP representative in advance when intending to use SHARP devices for any "specific" applications other than those recommended by SHARP or when it is unclear which category mentioned above controls the intended use.
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Control Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.