

Contents

Features	1
Applications	1
Dimensions (28-pin SOP)	2
Pin Assignment	2
Terminal Functions	2
Block Diagram	3
Absolute Maximum Ratings	3
Recommended Operating Conditions	3
DC Electrical Characteristics	4
Instructions	5
Application Example (S-1460BF)	5

The S-1460BF is a CMOS 4-bit microcomputer, which integrates ROM, RAM, a timer and I/O ports on a single chip. Since the S-1460BF has a 4K×16-bit ROM, a special terminal for remote control signal output and key-on wake-up functions, it is ideal for infrared remote controller.

■ Features

Characteristics

- Power supply voltage : 2.2 to 6.0 V
- Current consumption
 - Running : 0.7 mA max. at 1MHz, 3 V operation
 - Standby : 0.1 μ A typ., 2.0 μ A max.
- Operating frequency : 1 MHz
- Instruction execution time : 4.0 μ s at 1 MHz oscillation

Hardware functions

- ROM : 4K×16 bits
- RAM : 128×4 bits
- Port : 8-bit input, 8-bit output, 4-bit I/O
- Remote control signal output
- Standby counter
- Timer / Counter : 10-bit counter, 8-bit timer
- Watchdog timer
- Key-on wake-up
- Interrupt function: Internal (two)
- Oscillation circuit : Ceramic oscillator is built in
- Standby status : Stops oscillation, holds internal status
- Internal low-voltage detector

Software

- Instruction: 35 basic instruction sets (166 if addressing modes are included)
- 16-level subroutine nesting

Package

- 28-pin SOP

OTP version

- For software evaluation, use the S-14P60AF


■ Applications

- Remote controller
- Other small-sized control equipment


* Use S-1460CF when the operation voltage is 3 V.

CMOS 4-bit 1-chip MICROCOMPUTER
S-1460BF

■ Dimensions (28-pin SOP)

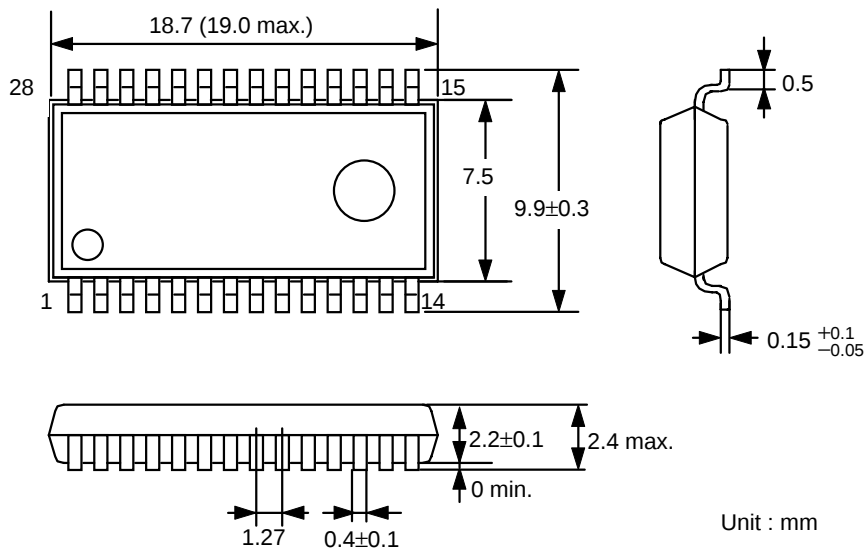

■ Pin Assignment

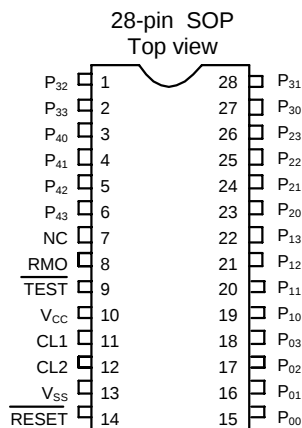


■ Terminal Functions

Name	I/O	Functions
V _{CC}	—	Positive power supply
V _{SS}	—	GND potential terminal
CL1	Input	Oscillation circuit input terminal
CL2	Output	Oscillation circuit output terminal
RESET	Input	Reset input terminal (pull-up resistor is built in)
TEST	Input	Test input terminal (pull-up resistor is built in)
RMO	Output	Remote control signal output terminal
P ₀₀ to P ₀₃	I/O	I/O ports, selectable in bit unit. Built-in pull-up resistor and Nch opendrain output are available in mask option.
P ₁₀ to P ₁₃ P ₂₀ to P ₂₃	Input	Input ports, also used as sense input of key matrix. Standby status is released by inputting low level in standby status. Pull-up resistor is built in.
P ₃₀ to P ₃₃ P ₄₀ to P ₄₃	Output	Output ports, also used as scan output of key matrix. Nch opendrain output is also available in mask option.

■ Block Diagram

The S-1460BF blocks connect with a 4-bit data bus(DB), 4-bit address bus(AB), 4-bit RAM address bus(RA) and 12-bit operation bus(OB).

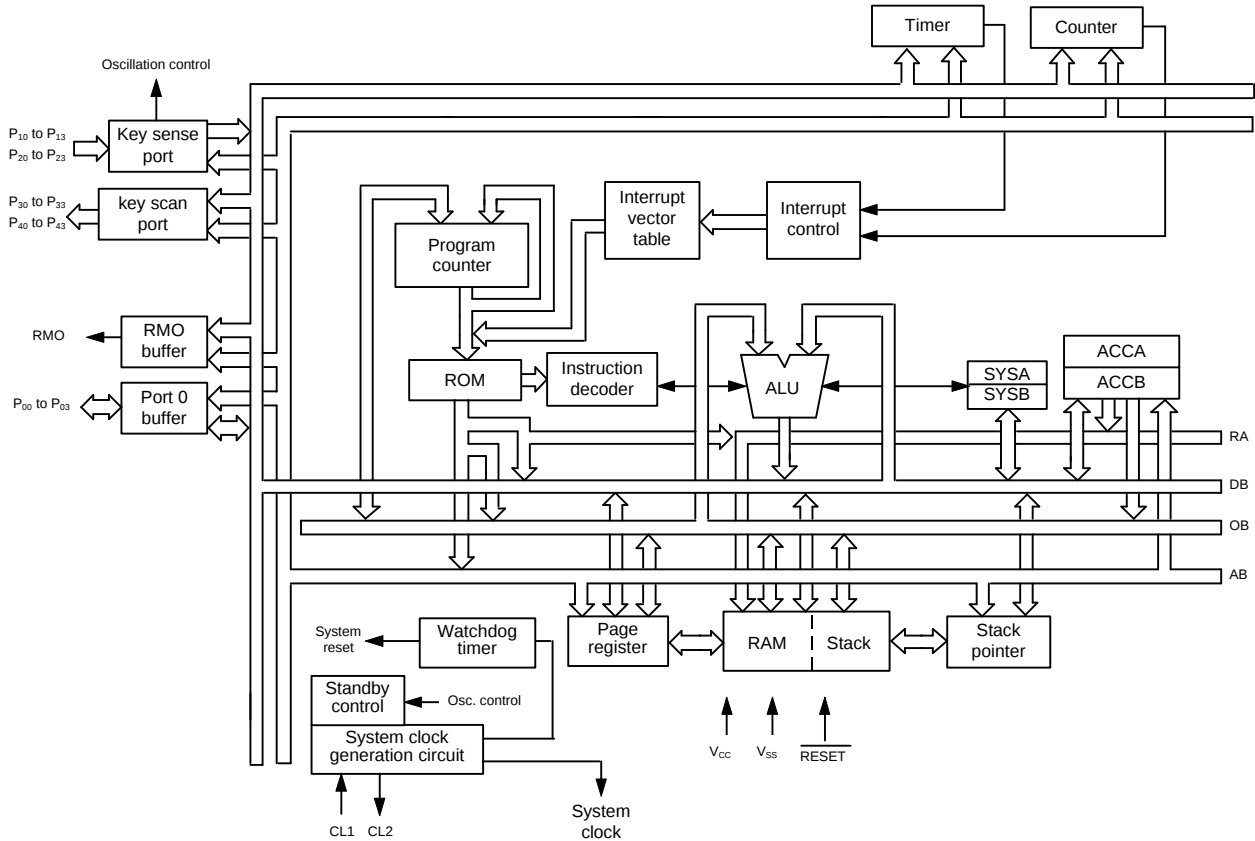

■ Absolute Maximum Ratings

Parameter	Symbol	Conditions	Ratings	Unit
Storage temperature	T_{stg}		-40 to +125	°C
Operating temperature	T_{opr}		-10 to +70	°C
Power supply voltage	V_{CC}	$T_a=25^{\circ}\text{C}$	-0.3 to +7.0	V
Input voltage	V_{IN}	$T_a=25^{\circ}\text{C}$	$V_{SS}-0.3$ to $V_{CC}+0.3$	V
Output voltage	V_{OUT}	$T_a=25^{\circ}\text{C}$	V_{SS} to V_{CC}	V
Power dissipation	P_D	$T_a=25^{\circ}\text{C}$	300	mW

■ Recommended Operating Conditions

($T_a=-10^{\circ}\text{C}$ to $+70^{\circ}\text{C}$)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power supply voltage	V_{CC}	$f_{OSC}=1\text{ MHz}$	2.2	—	6.0	V
Input voltage	V_{IN}		0	—	V_{CC}	V
System clock frequency	f_{OSC}	$V_{CC}=2.2$ to 6.0 V	0.2	—	1.0	MHz

CMOS 4-bit 1-chip MICROCOMPUTER

S-1460BF

■ DC Electrical Characteristics

- $V_{CC}=3\text{ V}$

($T_a=-10\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Conditions(applicable terminals)	Min.	Typ.	Max.	Unit
Operating current consumption	I_{CCO}	$f_{OSC}=1\text{ MHz}$, no load	—	0.25	0.7	mA
Standby current consumption	I_{CCS}	OFF mode (When low voltage detection is used)	—	0.5	2.0	μA
Standby current consumption	I_{CCS}	OFF mode (When low voltage detection is not used)	—	0.1	2.0	μA
High level input voltage	V_{IH}		$0.8 \times V_{CC}$	—	—	V
Low level input voltage	V_{IL}		—	—	$0.2 \times V_{CC}$	V
High level input leakage current	I_{LH}	All input pins* $V_{IN}=V_{CC}$	—	—	1	μA
Low level input leakage current	I_{LL}	Without pull-up resistor P_{00} to P_{03} , $V_{IN}=V_{SS}$	-1	—	—	μA
High level input current	I_{IH}	$\overline{\text{RESET}}$, $V_{IN}=V_{CC}-0.3\text{ V}$	-9	—	-0.9	μA
Low level input current 1	I_{IL1}	With pull-up resistor, P_{00} to P_{03} , P_{10} to P_{13} , P_{20} to P_{23} , $V_{IN}=V_{SS}$	-90	-30	-10	μA
Low level input current 2	I_{IL2}	$\overline{\text{RESET}}$, $V_{IN}=V_{SS}$	-6	-2	-0.6	μA
Low level input current 3	I_{IL3}	$\overline{\text{TEST}}$, $V_{IN}=V_{SS}$	-30	-10	-3	μA
High level output current 1	I_{OH1}	RMO, $V_{OUT}=2.1\text{ V}$	—	—	-5.0	mA
High level output current 2	I_{OH2}	P_{00} to P_{03} , P_{30} to P_{33} , P_{40} to P_{43} , $V_{OUT}=2.6\text{ V}$	—	—	-100	μA
Low level output current 1	I_{OL1}	RMO, $V_{OUT}=0.4\text{ V}$	250	—	—	μA
Low level output current 2	I_{OL2}	P_{00} to P_{03} , P_{30} to P_{33} , P_{40} to P_{43} , $V_{OUT}=0.4\text{ V}$	1.0	—	—	mA
Schmitt hysteresis width	V_{WD}		—	1.0	—	V

* $\overline{\text{TEST}}$, $\overline{\text{RESET}}$, P_{00} to P_{03} , P_{10} to P_{13} , P_{20} to P_{23}

- $V_{CC}=5\text{ V}$

($T_a=-10\text{ }^{\circ}\text{C}$ to $+70\text{ }^{\circ}\text{C}$)

Parameter	Symbol	Conditions(applicable terminals)	Min.	Typ.	Max.	Unit
Operating current consumption	I_{CCO}	$f_{OSC}=1\text{ MHz}$, no load	—	0.6	1.2	mA
Standby current consumption	I_{CCS}	OFF mode	—	0.1	5.0	μA
High level input voltage	V_{IH}		$0.8 \times V_{CC}$	—	—	V
Low level input voltage	V_{IL}		—	—	$0.2 \times V_{CC}$	V
High level input leakage current	I_{LH}	All input pins* $V_{IN}=V_{CC}$	—	—	1	μA
Low level input leakage current	I_{LL}	Without pull-up resistor P_{00} to P_{03} , $V_{IN}=V_{SS}$	-1	—	—	μA
High level input current	I_{IH}	$\overline{\text{RESET}}$, $V_{IN}=V_{CC}-0.3\text{ V}$	-15	—	-1.5	μA
Low level input current 1	I_{IL1}	With pull-up resistor, P_{00} to P_{03} , P_{10} to P_{13} , P_{20} to P_{23} , $V_{IN}=V_{SS}$	-230	-90	-30	μA
Low level input current 2	I_{IL2}	$\overline{\text{RESET}}$, $V_{IN}=V_{SS}$	-15	-6	-2.4	μA
Low level input current 3	I_{IL3}	$\overline{\text{TEST}}$, $V_{IN}=V_{SS}$	-75	-30	-12	μA
High level output current 1	I_{OH1}	RMO, $V_{OUT}=4.1\text{ V}$	—	—	-7	mA
High level output current 2	I_{OH2}	P_{00} to P_{03} , P_{30} to P_{33} , P_{40} to P_{43} , $V_{OUT}=4.6\text{ V}$	—	—	-250	μA
Low level output current 1	I_{OL1}	RMO, $V_{OUT}=0.4\text{ V}$	450	—	—	μA
Low level output current 2	I_{OL2}	P_{00} to P_{03} , P_{30} to P_{33} , P_{40} to P_{43} , $V_{OUT}=0.4\text{ V}$	1.5	—	—	mA
Schmitt hysteresis width	V_{WD}		—	2.2	—	V

* $\overline{\text{TEST}}$, $\overline{\text{RESET}}$, P_{00} to P_{03} , P_{10} to P_{13} , P_{20} to P_{23}

■ Instructions

1. Instructions are 16-bit length, and executed in a single instruction cycle(4 clocks).
2. The S-1460BF/14L60BF has 6 addressing modes.
 - 1) Direct addressing modes
 - 2) Relative addressing modes
 - 3) Immediate addressing modes
 - 4) Register addressing modes
 - 5) Accumulator indirect addressing modes
 - 6) Accumulator indexed addressing modes
3. Number of instructions.

	Basic	Including addressing modes
Transfer instruction	6	15
Arithmetic operation instruction	9	57
Logical operation instruction	8	66
Branch instruction	7	19
Rotate/shift instruction	2	6
CPU control instruction	3	3
Total	35	166

■ Application Example

