


SF1063A 549 MHz SAW Filter



- Designed for CATV Applications (Pilot Tone)
- Low Insertion Loss
- 9.1 X 7.1 mm Surface-Mount Case
- Unbalanced Input and Output



Characteristic	Sym	Min	Typ	Max	Units	Notes
Nominal Center Frequency	fc		549.000		MHz	1
Passband	Insertion Loss at fc	IL	7.5	9.0	dB	1, 2
	0.5 dB Passband	BW _{0.5}	±100		kHz	
	3 dB Passband	BW ₃	±630			
	Amplitude Ripple over fc ±100 kHz			0.5	dB _{P-P}	
Rejection	529.04 MHz to 545.75 MHz		40		dB	1, 2, 3
	551.4 MHz to 569.04 MHz		35			
	Ultimate		50			
Operating Temperature Range	T _A	-20		+85	°C	1

Impedance Matching to 50 Ω unbalanced	External L-C
Case Style	SM9171-10 9.1 x 7.1 mm Nominal Footprint
Lid Symbolization (XX = 2-character date code)	RFM SF1063A XX

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Max Soldering Profile	265°C for 10 s	

Electrical Connections

Connection	Terminals
Port 1 Hot	10
Port 1 Gnd Return	1
Port 2 Hot	5
Port 2 Gnd Return	6
Case Ground	All Others

Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
9. ©Copyright 1999, RF Monolithics Inc.
10. Electrostatic Sensitive Device. Observe precautions for handling.




RF Monolithics, Inc.
4347 Sigma Road
Dallas, Texas 75244
USA

Phone: +1(972)233-2903
Fax: +1(972)387-8148
e-mail: info@rfm.com
Home page: www.rfm.com

European Sales Office
44 1963 251383
44 1963 251510

SF1063A 549 MHz SAW Filter

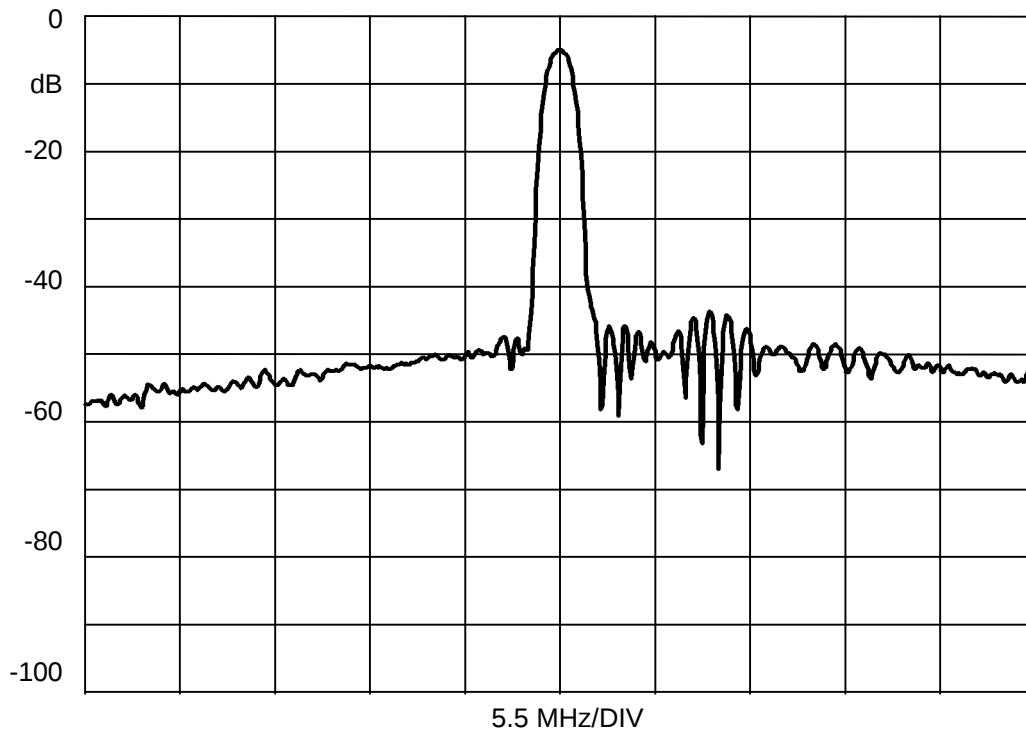


RF Monolithics, Inc.
4347 Sigma Road
Dallas, Texas 75244
USA

Phone: +1(972)233-2903
Fax: +1(972)387-8148
e-mail: info@rfm.com
Home page: www.rfm.com

European Sales Office
44 1963 251383
44 1963 251510

10-Terminal Ceramic Surface-Mount Case 9.1 x 7.1 mm Nominal Footprint





Case Dimensions


Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	8.86	9.09	9.40	0.349	0.358	0.370
B	6.88	7.11	7.40	0.271	0.280	0.291
C		1.91	2.00		0.075	0.079
D		0.99			0.039	
E		0.79			0.031	
H		1.0			0.039	
P		2.54			0.100	

Electrical Connections

Connection		Terminals
Port 1	Input or Return	6
	Return or Input	5
Port 2	Output or Return	1
	Return or Output	10
Ground		All others
Single Ended Operation		Return is ground
Differential Operation		Return is hot

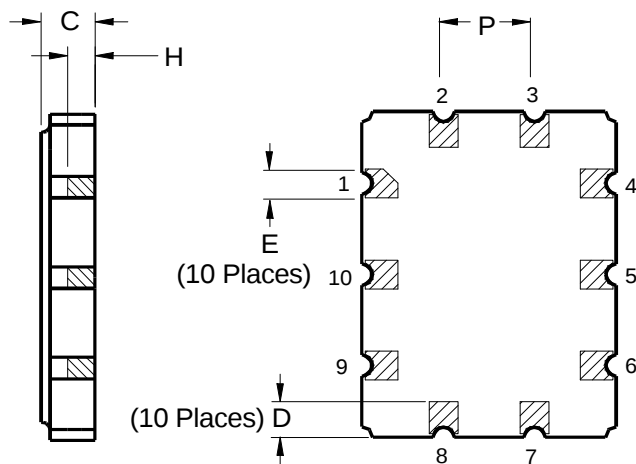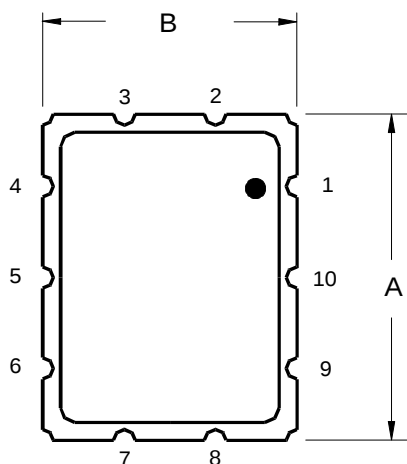

REV	ECN NO.	DESCRIPTION	APP/DATE
A	5073	INITIAL RELEASE	


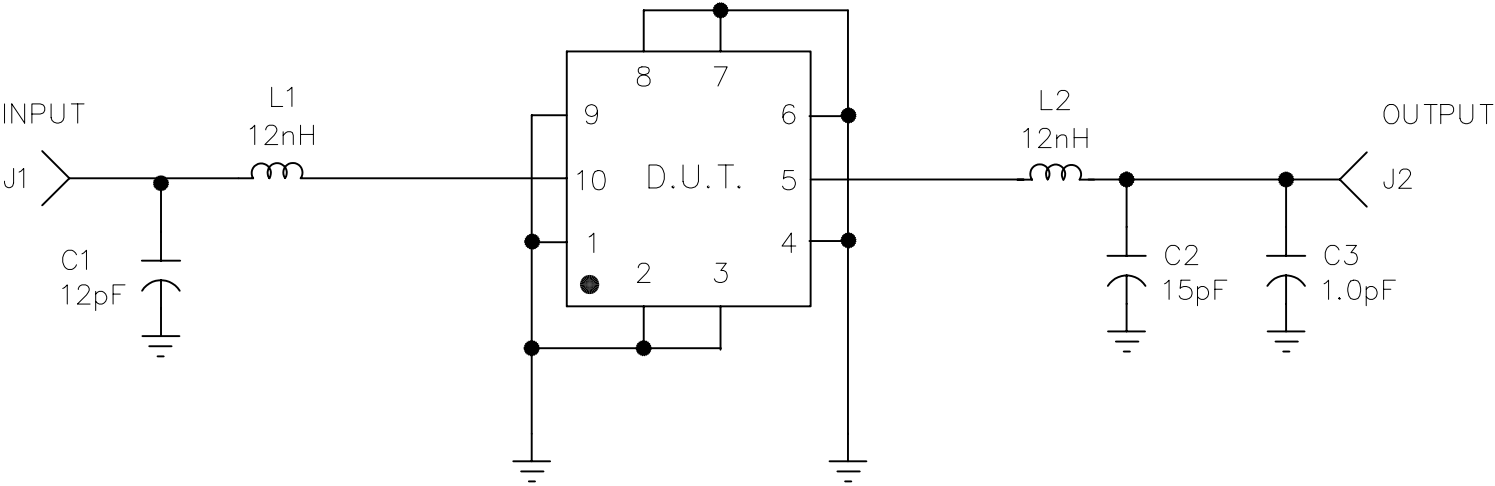


SCHEMATIC

DRAWN BY/DATE: J.J. LAYTON 11/13/96			TITLE: ASSEMBLY DIAGRAM, SF1063(DEMO)				
RF Monolithics, Inc. DALLAS, TEXAS 75244		CHECKED/APPROVED	SIZE A	CODE IDENT 2U874	DWG. NO. SF1063A-000	REV A	SHEET 1/6

NOTES:

1. SOLDER MOUNT COMPONENTS, CONNECTORS, TO PCB1
2. NOTE PROPER ORIENTATION OF INDUCTORS [L1, L2] SHOULD BE 90° TO EACH OTHER.
3. COMPONENTS MAY NEED TO BE TRADED FOR SLIGHTLY HIGHER OR LOWER DUE TO TOLERANCE LEVELS.

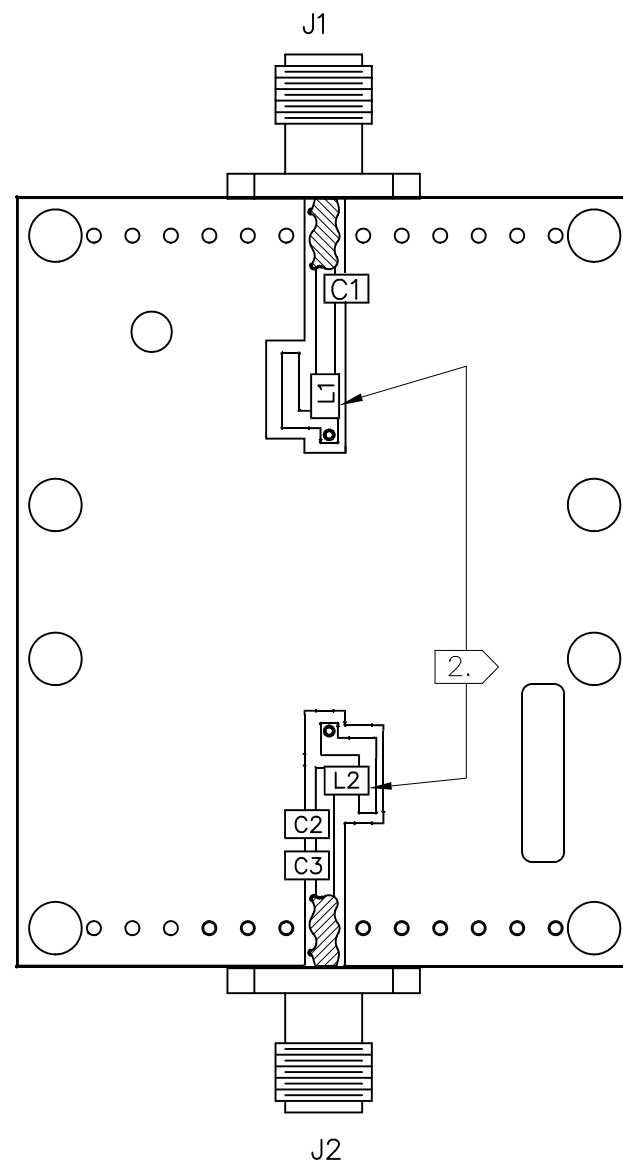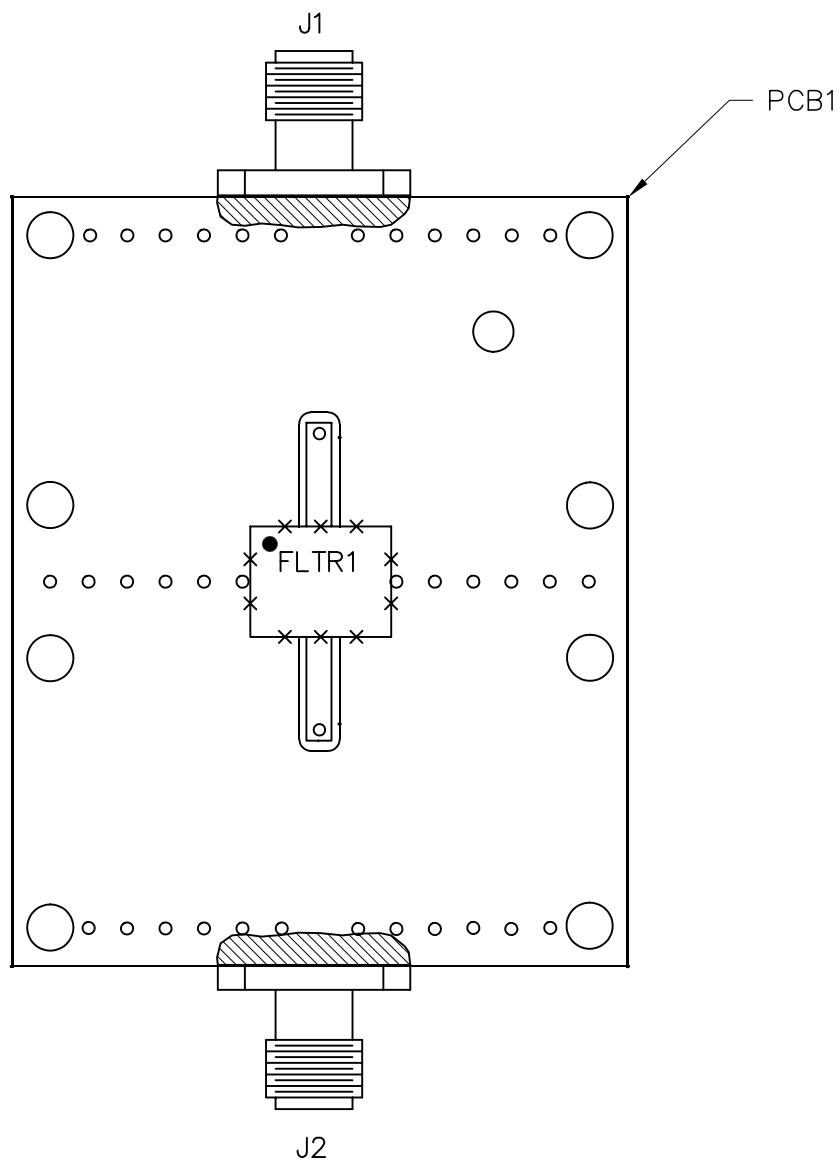

CH1 S₂₁ log MAG 10 dB/ REF -8 dB 1: -5.3028 dB

SF1063A (DEMO)

549.040 000 MHz

Max

Cor

7


PASS

H10

CH1 CENTER 549.040 000 MHz SPAN 40.000 000 MHz


SF1063A-000

REV: A

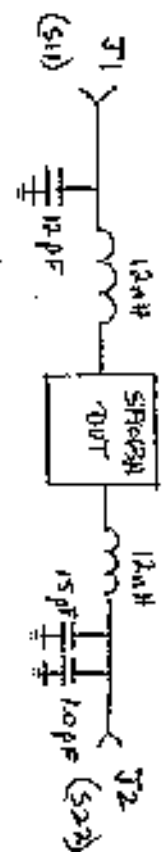

Sheet 3 of 6


CH1 S₂₁ log MAG 5 dB/ REF -8 dB 1: 0 dB

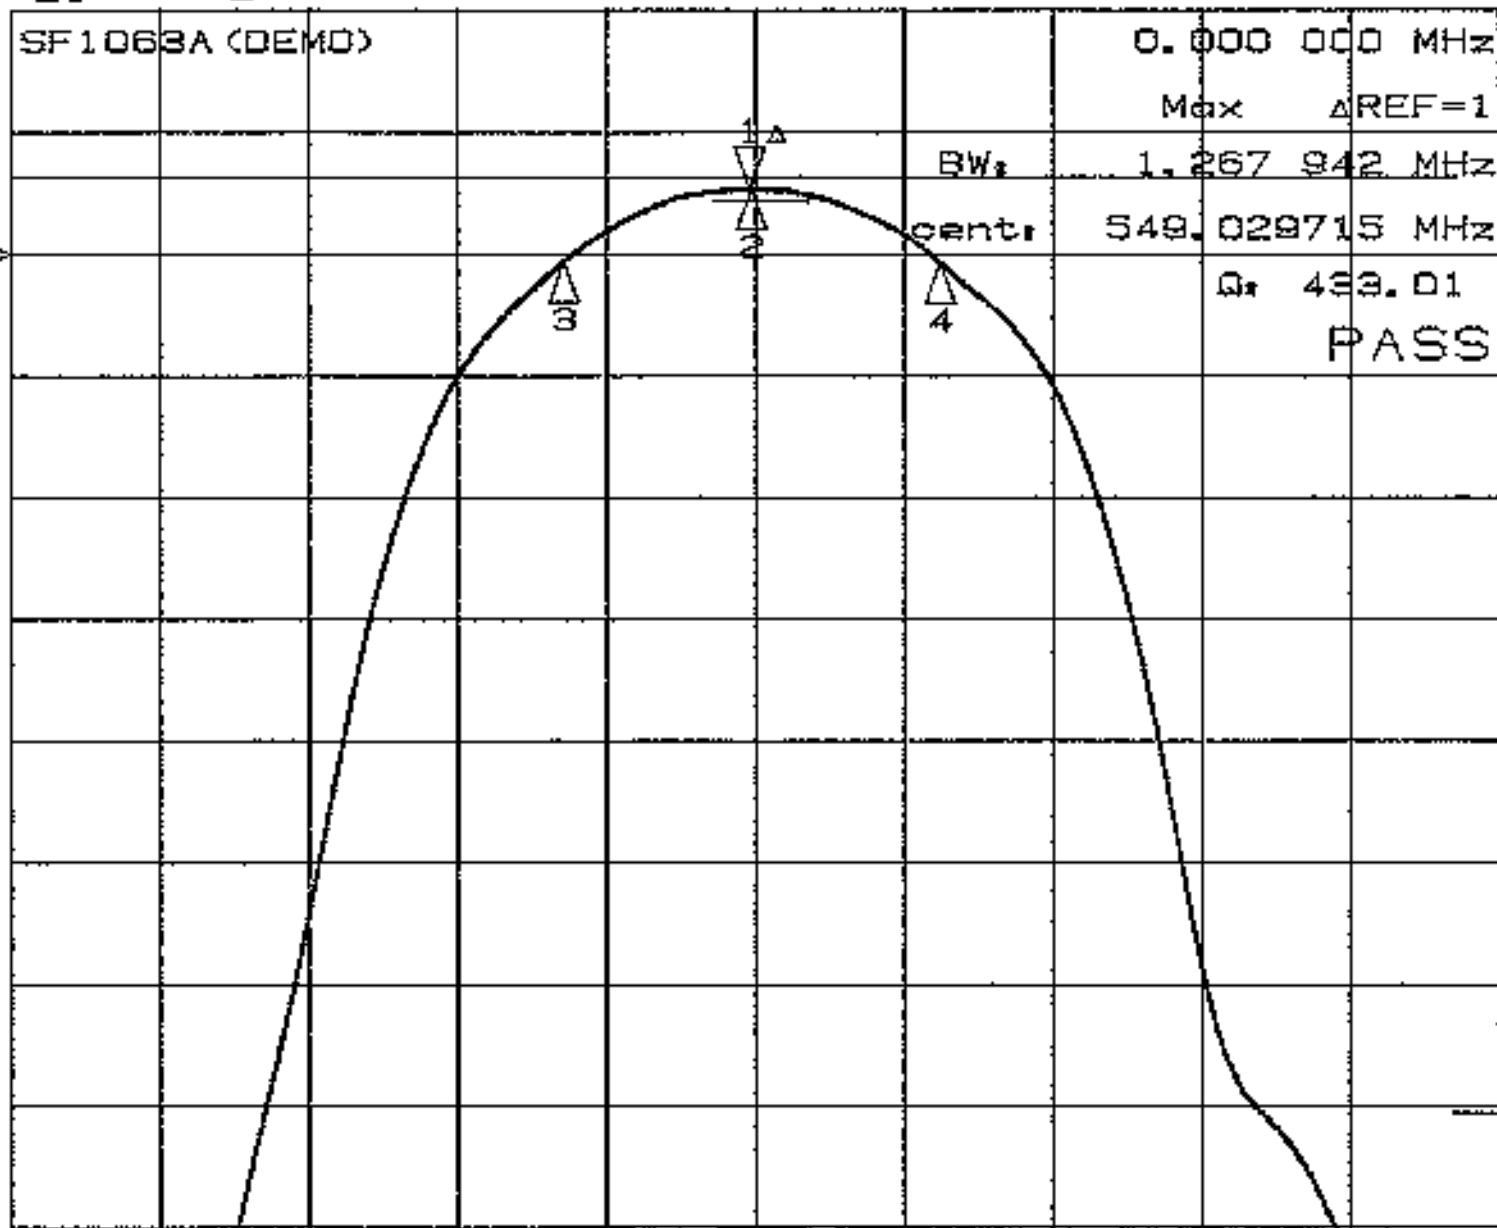

Cor

H1d

CENTER 549.040 000 MHz SPAN 5.000 000 MHz


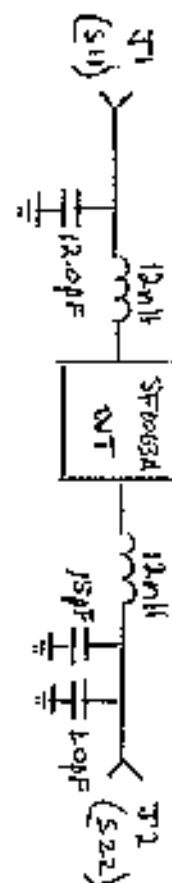


SF1063A-000 JLA 4086
REV: A

CH1 S₁₁ 1 U FS 1 50.299 Ω 1.0801 Ω 313.09 μ H
 SF1063A (DEMO) 549.040 000 MHz

Cor

Hid

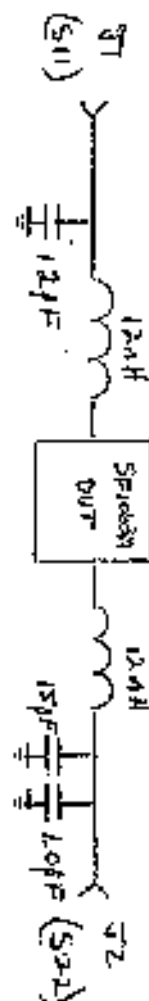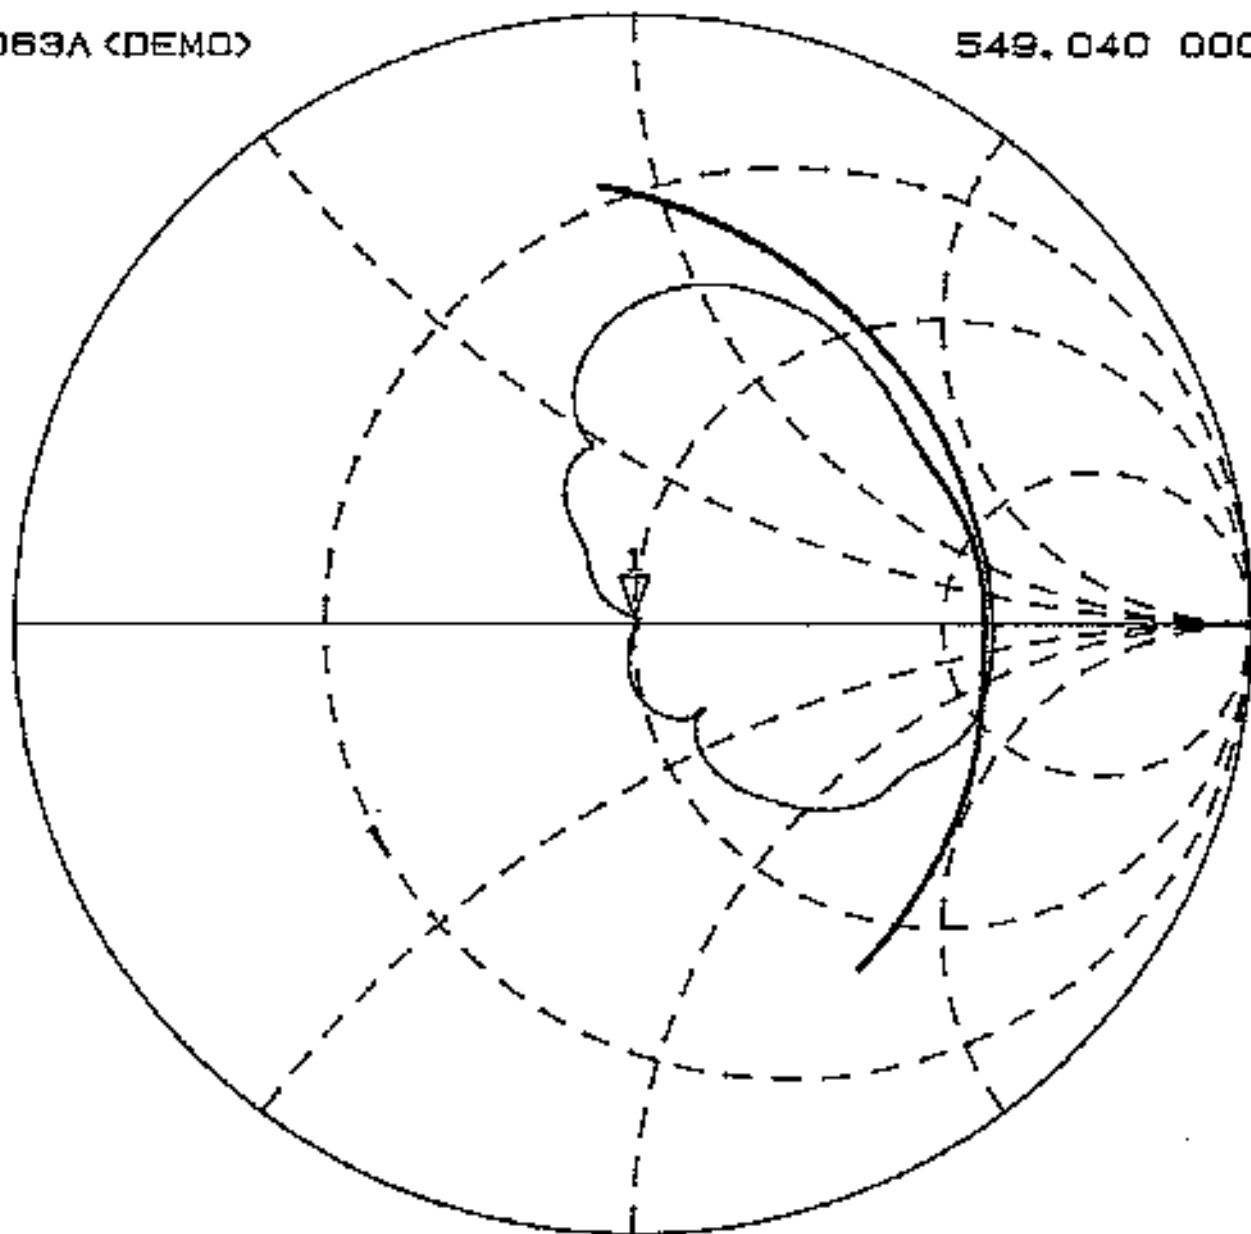

CH1 CENTER 549.040 000 MHz SPAN 40.000 000 MHz

SF1063A-000


REV: A

2W 5066

CH1 S₂₂ 1 U FS 1 30.927 Ω 4.1338 Ω 1.1983 nH
 SF1063A (DEMO) 549.040 000 MHz

Cor

H1d

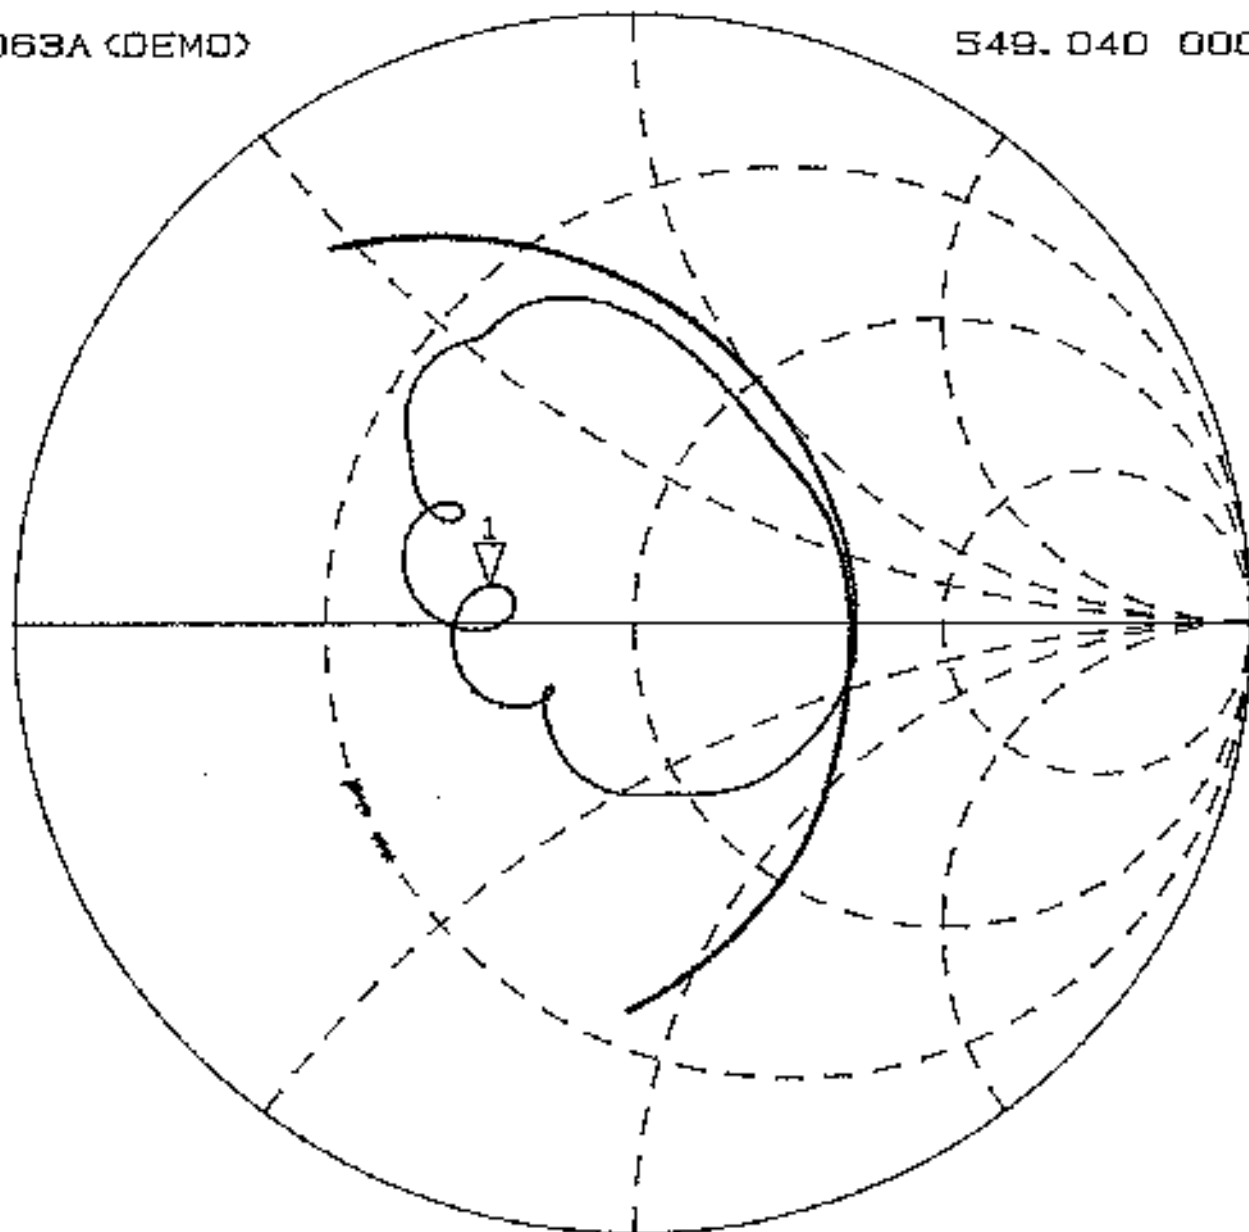

CH1 CENTER 549.040 000 MHz SPAN 40.000 000 MHz

SF1063A-000 STA 6086
 REV: A

BILL OF MATERIALS

<u>PART IDENTIFIER</u>	<u>DESCRIPTION 1</u>	<u>DESCRIPTION 2</u>	<u>QTY/ASSY</u>	<u>REFERENCE DESCRIPTION</u>
SF1063A(DEMO)	BOM,DEMOBOARD,SF1063A			
500-0003-120	CAP,CHIP,NPO,12(J),STD		2.0000	C1
500-0003-015	CAP,CHIP,NPO,1.5(C),STD		1.0000	C2
500-0003-010	CAP,CHIP,NPO,1.0(C),STD		1.0000	C3
SF1063A	FILTER,SM,549.000MHZ	C-COR	1.0000	FLTR1
500-0248-001	CONN,COAX,FLANGE MT.JACK		2.0000	J1,2
500-0619-120	IND,CHIP,0603,12NH,10%		2.0000	L1,2
400-0845-001	PCB, SMT FILTER,	TEST FIXTURE	1.0000	PCB1



SIZE
A

FSCM NO.
2U874

DWG NO.
SF1063A(DEMO)

SCALE **NONE**

W/O or ECN **5073**

REV **B**

SHEET **1** OF **2**

REV HISTORY	
-------------	--

[illegible]

		SIZE A	FSCM NO. 2U874	DWG NO. SF1063A(DEMO)	
	SCALE NONE	W/O or ECN 5073		REV B	SHEET 2 OF 2