


Model 3200, 3201, 3205, 3206 & 3209 Programmable Attenuators

dc to 2.0/3.0 GHz
1 Watt

Wide Selection of Attenuation Ranges & Steps

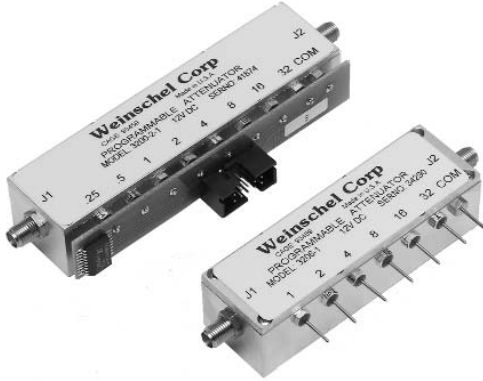

Features

- /// **Widest Selection of Attenuation Ranges and Step Sizes**
- /// **High Quality Construction and Connectors**
- /// **Special Configurations Available Upon Request**
 - Custom Cell/Step Size Configurations
 - 3.0 GHz and Higher Frequencies

Description

The 3200 Series Programmable Step Attenuators are designed for use in automatic test equipment and OEM systems operating in the dc to 3 GHz frequency range. This series is available in many standard attenuation ranges and cell configurations. Custom designed configurations are available upon request. Each cell contains a standard TO-5 type double-pole, double-throw relay that provides a zero path or attenuated path for the RF signal.

Microstrip circuitry and special compensation techniques produce flat attenuation versus frequency characteristics. The microstrip construction, using thick-film circuit elements, ensures product uniformity. To minimize RF leakage, the 3200 Series Attenuators are provided with gold-plated contact areas and feedthrough filters at each control terminal.

Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE:

dc to 2.0 GHz: 3200-1, 3200-2, 3201-1, 3201-2, 3205-1, 3205-2, 3205-3, 3206-1, 3209-1

dc to 3.0 GHz: 3200-1E, 3200-2E, 3201-1E, 3205-3E, 3206-1E, 3209-1E

CELL CONFIGURATIONS:

Model Number	NO. Cells	Attenuation Range/Steps (dB)	Cell Increments (dB)
3200-1 3200-1E	8	127/1	1, 2, 4, 8, 16, 32, 64*
3200-2 3200-2E	8	63.75/0.25	0.25, 0.5, 1, 2, 4, 8, 16, 32
3201-1 3201-1E	5	31/1	1, 2, 4, 8, 16
3201-2	5	120/10	10, 20, 30, 60**
3205-1	4	70/10	10, 20, 20, 20
3205-2	4	55/5	5, 10, 20, 20
3205-3 3205-3E	4	1.5/0.1	0.1, 0.2, 0.4, 0.8
3206-1 3206-1E	6	63/1	1, 2, 4, 8, 16, 32
3209-1 3209-1E	10	64.5/0.1	0.1, 0.2, 0.4, 0.8, 1, 2, 4, 8, 16, 32

*64 dB cell comprised of two 32 dB cells

**60 dB cell comprised of two 30 dB cells

MAXIMUM SWR:

Freq Range (GHz)	3200-1 3200-2	3200-1E 3200-2E	3201-X 3205-X 3206-X	3201-1E 3205-3E 3206-1E	3209-1	3209-1E
dc - 0.2	1.30	1.20	1.25	1.20	1.35	1.35
0.2 - 2	1.25	1.20	1.25	1.20	1.35	1.35
2 - 3	---	1.40	---	1.30	---	1.45

INCREMENTAL ATTENUATION ACCURACY:

Frequency Range (GHz)	Accuracy
dc - 0.5	± 0.2 dB or 0.5%
0.5 - 1	± 0.2 dB or 1.0%
1 - 3	± 0.3 dB or 2.0%

MONOTONICITY: dc to 3.0 GHz

INCREMENTAL TEMPERATURE COEFFICIENT:

30 and 32 dB Cells: 0.00005 dB/dB/°C
All other cells: 0.00002 dB/dB/°C

Specifications - Con't

MAXIMUM INSERTION LOSS (dB):

Frequency Range (GHz)	3200-1 3200-2	3200-1E 3200-2E	3201-1 3201-2	3205-X	3201-1E 3205-3E	3206-1	3206-1E	3209-1	3209-1E
dc - 0.5	2.80	2.00	1.80	1.80	1.25	2.00	1.50	3.50	3.00
0.5 - 1.0	3.50	2.70	2.40	2.30	1.75	2.70	2.00	4.50	3.50
1.0 - 1.5	4.25	3.00	3.00	2.80	2.25	3.30	2.50	5.60	4.00
1.5 - 2.0	4.75	3.50	3.75	3.30	2.50	4.00	2.80	6.70	4.50
2.0-3.0	---	4.30	---	---	3.40	---	3.70	---	5.50

POWER RATING: 1 watt average to 25°C ambient temperature, derated linearly to 0.25 watt @ 71°C. 50 watts peak (5 µsec pulse width; 1% duty cycle)

POWER COEFFICIENT: <0.005 dB/dB/watt

RATED SWITCH LIFE: 5 million cycles operations per cell @ 0 dBm

SWITCHING TIME: 6 msec. maximum at nominal rated voltage

RELEASE TIME: 3 msec maximum

CYCLING RATE: 5 Hz maximum per relay

OPERATING VOLTAGE: +12V (+ 16V maximum; +10V minimum)

OPERATING CURRENT:

2 GHz Models: 14 mA typical per cell @ +12V

3 GHz Models: 30 mA typical per cell @ +12V

TEMPERATURE RANGE (Operating): -55°C to +71°C

CALIBRATION: Test data is available at additional cost.

CONNECTORS: SMA female connectors per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connectors.

CONTROL TERMINALS: 0.040 inch. (1 mm) diameter solderable leads. May be used with PC board sockets/receptacles.

CONSTRUCTION:

Housing: Aluminum

Connectors: Stainless steel body and beryllium copper contacts.

Control terminals: Brass/Copper, Silver plated

WEIGHT (Typical):

3200-1, 3200-2, 3200-1E & 3200-2E: 117 g (4.1 oz)

3201-1 & 3201-1E: 89 g (3.1 oz)

3201-2: 96 g (3.4 oz)

3205-1, 3205-2, 3205-3, 3205-3E: 77 g (2.7 oz)

3206-1, 3206-1E: 99 g (3.5 oz)

3209-1, 3209-1E: 159 g (5.6 oz)

MODEL NUMBER DESCRIPTION:

Example:

3200-X* - X

Basic Model
Number

TTL Option
(Add -1 or -2)
Example: 3200-1-1

*Refer to Cell Configuration table for available attenuation ranges and step sizes. Add E for 3 GHz designs, check table for available models.

CONTROL CONFIGURATION:

Standard Unit: One terminal is connected to case ground and the remaining terminals are provided for activation of individual cells. Attenuation is fail-safe to "0" setting in the absence of a control voltage. Application of a voltage (+) to a particular cell causes it to switch to the attenuate position.

Units with TTL Option: Units with this option are supplied with a very low profile connectorized TTL interface board mounted directly to the control terminals. This TTL interface option is available with either a 10 pin ribbon cable connector or a 15 pin "D" connector (**limited models**, refer to list below). Each type is supplied with a mating connector. Refer to Physical Dimensions for mating connector pin/wiring details. Two wires are specified for supply voltage and ground. The remaining wires will accept TTL control signals to activate or de-activate a particular attenuation cell. A TTL high will energize a cell to the high attenuation state, whereas a TTL low will maintain a cell in its zero attenuation state.

To order 3200 Series Attenuators with this option add -1 to basic model number for ribbon cable connector and -2 for the "D" connector. Example: Model 3201-1 with a TTL interface board would be 3201-1-1. Mating connector is provided. To order a TTL Driver board separately for an existing 3200 Series Attenuator, use the following:

Basic Model No.	TTL BD Kit Part No. 10 Pin Ribbon	TTL BD Part No. 15 Pin "D" CONN
3200-1, 3200-1E	101-1780	101-1798-000**
3200-2, 3200-2E	101-1780	101-1798-000**
3201-1, 3201-2E	101-1781	101-1798-001**
3201-2	101-1781	101-1798-001**
3205-1	101-1781	101-1798-001**
3205-2	101-1781	101-1798-001**
3205-3, 3205-3E	101-1781	101-1798-001**
3206-1, 3206-3E	101-1781	N/A
3209-1, 3209-1E	101-1804-000*	N/A

* 14 pin ribbon connector.

** 3 FT TTL Interface Cable Part No. 101-1805 supplied with unit.

Note: Control is non-latching and requires a continuous control signal for the period of time in which attenuation is required.



TTL DRIVER SPECIFICATIONS:

INTERFACE CONNECTOR: Option -1 (Models 3200, 3201, 3205 and 3206): 10 pin .025 square post header on .1 center, mates with Amp connector 746285-1 or equivalent. Option -1 (3209): 14 pin .025 square post header on .1 center, mates with Amp connector 746285-2 or equivalent. Option -2: 15 pin D Socket Connector, mates with Cannon connector DA-15S or equivalent.

INPUT VOLTAGE: V_{IN} High = +2.0V minimum
+5.0V typical
 V_{CC} maximum
 V_{IN} Low = 0 minimum
0.8 maximum

INPUT CURRENT: I_{IN} ($V_{IN}=2.4$ V) = 55 μ A
 I_{IN} ($V_{IN}=3.85$ V) = 280 μ A

SUPPLY CURRENT (Digital Section): $I_{CC}=25.0$ mA maximum


SUPPLY CURRENT (per cell continuous): $I_{CC}=25.0$ mA maximum for 2 GHz models and 30 mA per cell for 3 GHz models.

SUPPLY VOLTAGE: $V_{CC}=+12.0$ to +15V

TEMPERATURE RANGE (Operating): -40°C to +70°C

NEW SMARTSTEP DRIVER MODELS: Most 3200s are available with a SmartStep interface\driver cards. These are designed to interface with our 8210A Series SmartStep Controllers which greatly simplifies computer control applications. Refer to Model 3200T and 3201T data sheet for more information.

PHYSICAL DIMENSIONS:

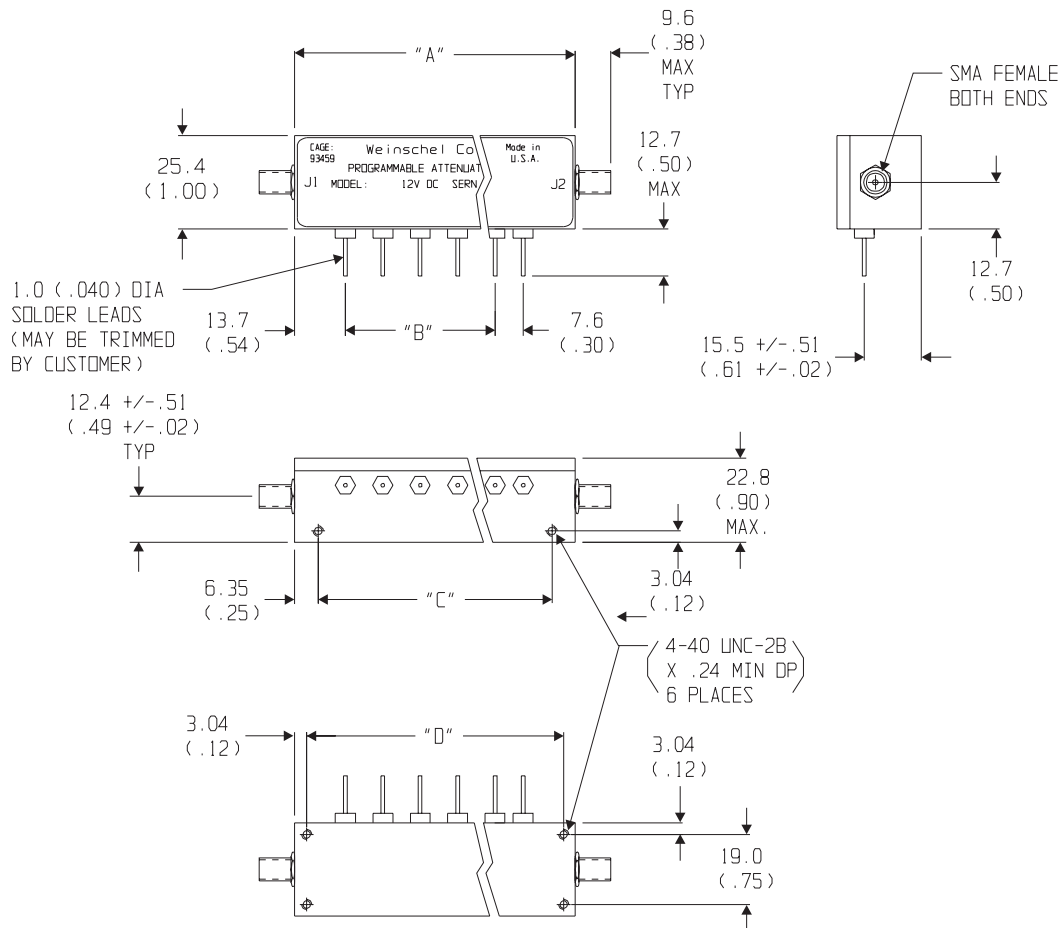


Model No.	No. Cells	A	B	C	D
3200-X	8	101.6 (4.0)	7 EQ SPCS @ 10.16 (.40) = 71.1 (2.80)	88.9 (3.50)	95.2 (3.75)
3201-X	5/4	76.2 (3.00)	4 EQ SPCS @ 10.16 (.40) = 40.64 (1.60)	63.5 (2.50)	69.8 (2.75)
3205-X	4	58.9 (2.32)	3 EQ SPCS @ 10.16 (.40) = 30.5 (1.20)	46.2 (1.82)	52.6 (2.07)
3206-X	6	81.3±0.5 (3.20±0.02)	5 EQ SPCS @ 10.16 (.40) = 50.8 (2.00)	68.6 (2.70)	75.18 (2.96)


NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

PHYSICAL DIMENSIONS:

TTL OPTION -1 (3200, 3201, 3206):

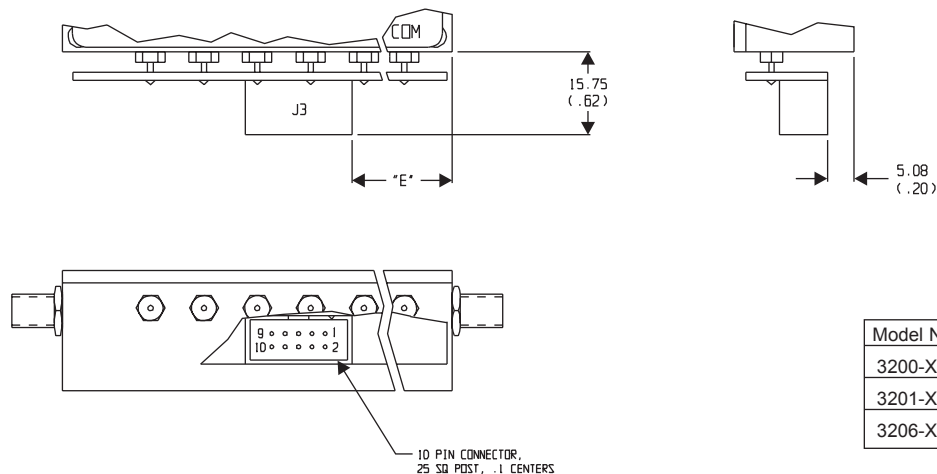

TTL OPTION -1 (3205):

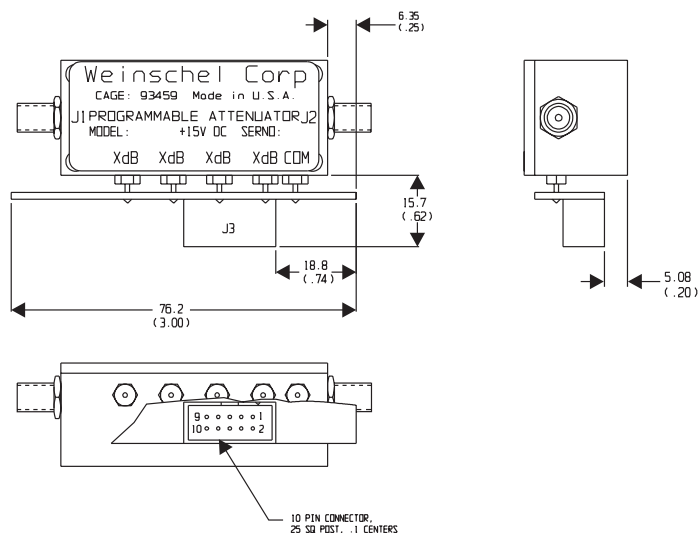

Control Connector J3 Pin Locations:

TTL Conn PIN No. (J3)	3200-1-1 dB (Cell)	3200-2-1 dB (Cell)	3201-1-1 dB (Cell)	3201-2-1 dB (Cell)	3205-1-1 dB (Cell)	3205-2-1 dB (Cell)	3205-3-1 dB (Cell)	3206-1-1 dB (Cell)
1	32	0.25	NC	NC	NC	NC	NC	NC
2	1	0.5	NC	NC	NC	NC	NC	NC
3	2	1	1	30	NC	NC	NC	1
4	32*	2	2	10	10	5	0.1	2
5	4	4	4	30**	20	10	0.2	4
6	8	8	8	20	20	20	0.4	8
7	16	16	16	30**	20	20	0.8	16
8	32*	32	NC	NC	NC	NC	NC	32
9	COM	COM	COM	COM	COM	COM	COM	COM
10	+Vcc	+Vcc	+Vcc	+Vcc	+ Vcc	+ Vcc	+Vcc	+ Vcc

*64 dB cell comprised of two 32 dB cells

**60 dB cell comprised of two 30 dB cells


NC = Not Connected

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.



PHYSICAL DIMENSIONS:

TTL Driver Option -2 (3200, 3201, 3205):

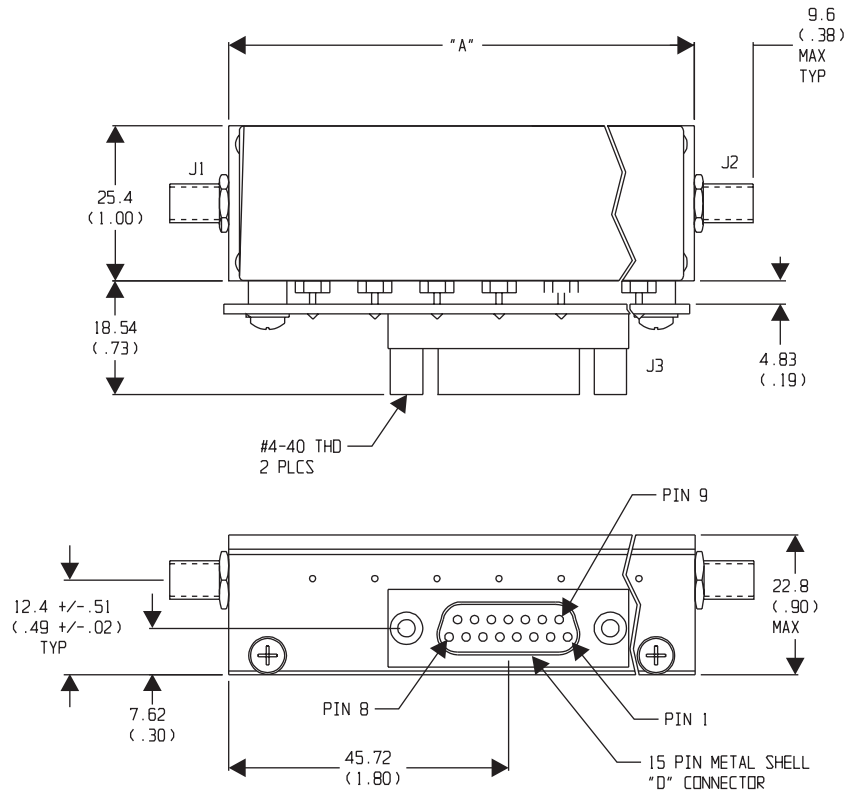

Model No.	A
3200-X-2	101.6 (4.00)
3201-X-2	76.2 (3.00)
3205-X-2	76.2 (3.00)

Control Connector J3 Pin Locations:

"D" Conn PIN No. (J3)	3200-1-2 dB (Cell)	3200-2-2 dB (Cell)	3201-1-2 dB (Cell)	3201-2-2 dB (Cell)	3205-1-2 dB (Cell)	3205-2-2 dB (Cell)	3205-3-2 dB (Cell)	Cable (P/N 101-1805) Color Code
1	32	32	NC	NC	NC	NC	NC	BRN
2	16	16	NC	NC	NC	NC	NC	YEL
3	8	8	NC	NC	NC	NC	NC	GRN
4	4	4	16	30**	20	20	0.8	LT BLU
5	32	0.25	1	30**	NC	NC	NC	VIO
6	1	0.5	2	10	10	5	0.1	GRY
7	2	1	4	30	20	10	0.2	WHT
8	32*	2	8	20	20	10	0.4	WHT/BLK
9	NC	NC	NC	NC	NC	NC	NC	RED
10	GND	GND	GND	GND	GND	GND	GND	BLK
11	NC	NC	NC	NC	NC	NC	NC	---
12	NC	NC	NC	NC	NC	NC	NC	---
13	NC	NC	NC	NC	NC	NC	NC	---
14	NC	NC	NC	NC	NC	NC	NC	---
15	+Vcc	+Vcc	+Vcc	+Vcc	+Vcc	+Vcc	+Vcc	ORN

*64 dB cell comprised of two 32 dB cells


**60 dB cell comprised of two 30 dB cells

NC = Not Connected


NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.

PHYSICAL DIMENSIONS:

Model 3209-1:

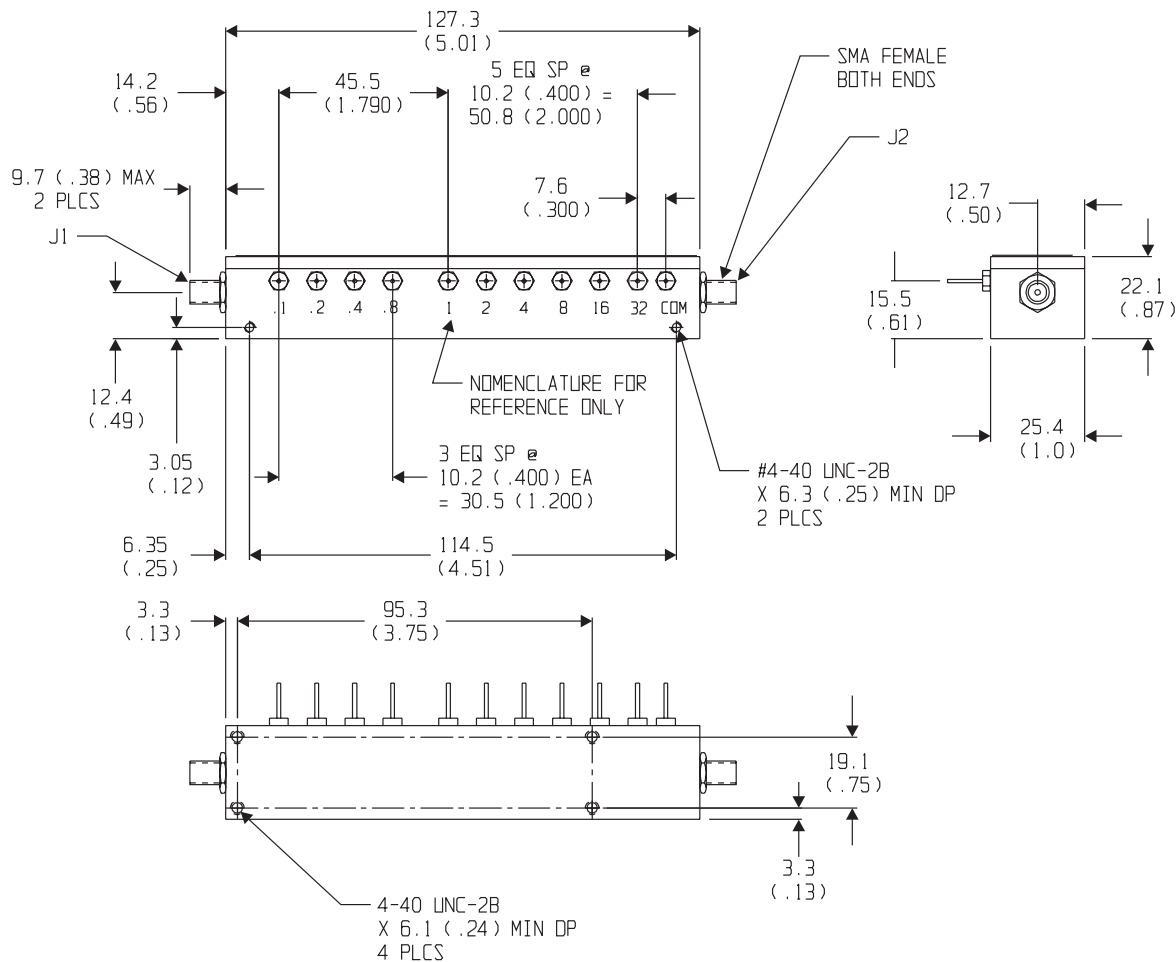

Model 3209-1-1 (TTL Option -1):

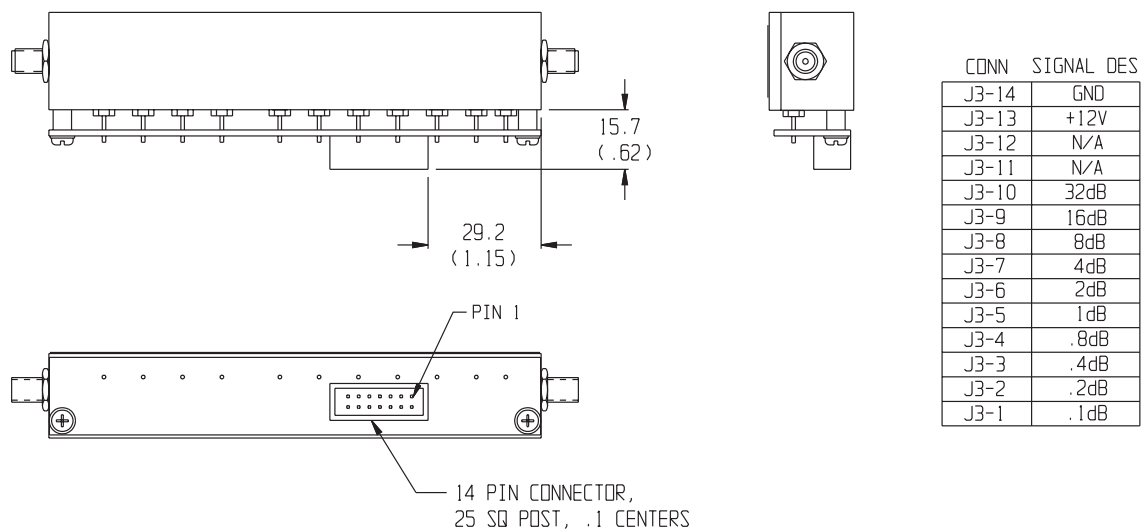

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.