


- Fully Compliant with IrDA 1.1 (4 MBPS)
- Compatible with ASK, HP-SIR and TV Remote
- No Programming Required to Switch Speeds
- Backward Compatible to Slower IrDA Speeds
- Excellent Noise Immunity
- Fully Supportable by all Interface Chips
- Designed to Compensate for Light Loss Caused by Cosmetic Windows

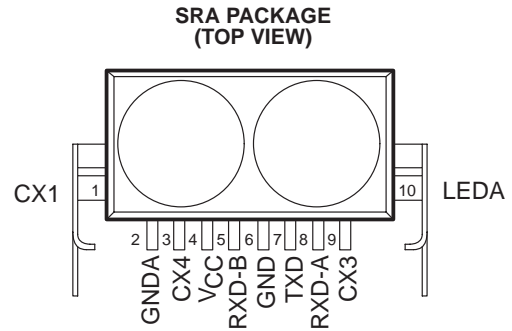

## description

The TSLM1100 is an infrared transceiver that provides the interface between logic and IR signals for through-air, serial, half-duplex IR data links. The TSLM1100 is compliant with the Infrared Data Association (IrDA) 1.1 physical-layer specification. Additionally, the TSLM1100 is compatible with ASK, HP-SIR and TV Remote standards.

The TSLM1100 is a hybrid device that includes a high-speed AlGaAs 870-nm LED, a silicon intrinsic PN junction (PIN) diode, and a LinCMOS transceiver integrated circuit. This IC has the LED driver and a receiver that provides two output signals: RXD-A for data rates from 2.4 kb/s to 115.2 kb/s and RXD-B for data rates of 576 kb/s to 4.0 Mb/s.

The device is encapsulated in a visible-light-rejecting plastic package that has integral lenses for the LED and the PIN diode. The receiver lens increases the effective area of the PIN diode to increase sensitivity. The LED lens is designed to provide a beam angle of  $\pm 30^\circ$ . The receiver outputs pulse low when an IR signal is detected. The power supply for both PIN diode and LED should be filtered to minimize noise from external sources.

This transceiver is well suited for a wide variety of IR interface applications including: PC notebooks, PDAs, pagers, printers, cameras, LANs, telephones and industrial handheld devices.

**FUNCTION TABLE**

INPUTS		OUTPUTS		
TXD	$E_e$	$I_e(\text{LED})$	RXD-A	RXD-B
$V_{IH}$	X	High	NV	NV
$V_{IL}$	$E_{I(H)}^\dagger$	Low	Low	NV
$V_{IL}$	$E_{I(H)}^\ddagger$	Low	NV	Low
$V_{IL}$	$E_{I(L)}$	Low	High	High

X – don't care,      NV – not valid

$^\dagger$  Data rates up to 115.2 kb/s

$^\ddagger$  Data rates > 115.2 kb/s

# TSLM1100

## IrDA COMPLIANT TRANSCEIVER

SOES034A – SEPTEMBER 1997 – REVISED OCTOBER 1997

### Terminal Functions

PIN NAME	NO.	DESCRIPTION
CX1	1	Photodiode bypass capacitor
GND A	2	Analog ground
CX4	3	Averaging capacitor
V <sub>CC</sub>	4	Supply voltage
RXD-B	5	Receiver data output – Channel B
GND	6	Ground
TXD	7	Transmitter data input
RXD-A	8	Receiver data output – Channel A
CX3	9	Threshold capacitor
LEDA	10	LED anode

### absolute maximum ratings over operating free-air temperature (unless otherwise noted)<sup>†</sup>

Supply voltage, V <sub>CC</sub>	7 V
LED anode voltage range, V <sub>I(LEDA)</sub>	–0.5 V to 7 V
Receiver data output voltage range: V <sub>O(RXD-A)</sub>	–0.5 V to V <sub>CC</sub> + 0.5 V
V <sub>O(RXD-B)</sub>	–0.5 V to V <sub>CC</sub> + 0.5 V
Average LED current, I <sub>I(LED)(avg)</sub> : Direct current	100 mA
Pulsed, ≤ 90-μs pulse width, ≤ 25% duty cycle	165 mA
Peak LED current, I <sub>I(LED)(PK)</sub> : ≤ 90-μs pulse width, ≤ 25% duty cycle	660 mA
≤ 2-μs pulse width, ≤ 10% duty cycle	1 A
Transmitter data input current range, I <sub>I(TXD)</sub>	–12 mA to 12 mA
Storage temperature range, T <sub>stg</sub>	–20°C to 85°C

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### recommended operating conditions

	CONDITIONS	MIN	MAX	UNITS
Supply voltage, V <sub>CC</sub>		4.75	5.25	V
Logic high transmitter input voltage, V <sub>IH</sub>		4.25	5.25	V
Logic low transmitter input voltage, V <sub>IL</sub>		0.0	0.3	V
Logic high receiver input irradiance, E <sub>e(IH)</sub>	For in-band signals ≤ 116 kb/s	0.0036	500	mW/cm <sup>2</sup>
	For in-band signals ≥ 576 kb/s	0.0090	500	mW/cm <sup>2</sup>
Logic low receiver input irradiance, E <sub>e(IL)</sub>	For in-band signals		0.3	μW/cm <sup>2</sup>
LED (logic high) Current pulse amplitude, I <sub>I(LEDA)</sub>		400	660	mA
Receiver setup time	For full sensitivity after transmitting		1.0	ms
Receiver signal rate, RXD-A		2.4	116	kb/s
Receiver signal rate, RXD-B		0.576	4	Mb/s
Ambient light	See IrDA serial infrared physical link specification, 1.1e Appendix A for Ambient levels and Appendix B			
Operating temperature, T <sub>A</sub>	Case to ambient thermal resistance ≤ 50°C/W	0	70	°C



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**electrical characteristics at  $V_{CC} = 5\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted); test conditions represent worst-case values for the parameters under test**

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V <sub>OL</sub>	Low-level output voltage, receiver data	RXD-A	I <sub>O</sub> = 1 mA, for in-band E <sub>e</sub> ≥ 3.6 μW/cm <sup>2</sup> , ϕ <sup>1/2</sup> ≤ 15°			0.5	V
		RXD-B	I <sub>O</sub> = 1 mA, for in-band E <sub>e</sub> ≥ 9 μW/cm <sup>2</sup> , ϕ <sup>1/2</sup> ≤ 15°			0.5	
V <sub>OH</sub>	High-level output voltage, receiver data	RXD-A	I <sub>O</sub> = −20 μA, for in-band E <sub>e</sub> ≤ 0.3 μW/cm <sup>2</sup>	V <sub>CC</sub> − 0.6			V
		RXD-B	I <sub>O</sub> = −20 μA, for in-band E <sub>e</sub> ≤ 0.3 μW/cm <sup>2</sup>	V <sub>CC</sub> − 1.2			
I <sub>IL</sub>	Low-level input current, transmitter data	I <sub>IL</sub> (TXD)	GND ≤ V <sub>IL</sub> (TXD) ≤ 0.3 V	−2		2	μA
I <sub>IH</sub>	High-level input current, transmitter data	I <sub>IH</sub> (TXD)	V <sub>IH</sub> (TXD) = 4.25 V		40	250	μA
v <sub>T</sub>	On-state voltage LED anode	v <sub>T</sub> (LEDA)	I <sub>I</sub> (LED) = 400 mA at 25°C V <sub>IH</sub> (TXD) = 4.25 V			2.78	V
I <sub>D</sub> (I <sub>kg</sub> )	OFF-state leakage current, LED anode	I <sub>D</sub> (I <sub>kg</sub> )(LEDA)	V <sub>I</sub> (LEDA) = V <sub>CC</sub> = 5.25 V V <sub>IL</sub> (TXD) = 0.3 V			250	μA
I <sub>CC1</sub>	Supply current, idle state		V <sub>CC</sub> = 5.25 V V <sub>I</sub> (TXD) = V <sub>IL</sub> , E <sub>e</sub> = 0		3	5.1	mA
I <sub>CC2</sub>	Supply current, active receiver		V <sub>CC</sub> = 5.25 V V <sub>I</sub> (TXD) = V <sub>IL</sub> , E <sub>e</sub> ≤ 500 nW/cm <sup>2</sup>		4	18	mA

#### optical specifications

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
$2\phi^{1/2}$	Receiver viewing angle		$\pm 15$			$^\circ$
	Effective detector area		0.2			$\text{cm}^2$
I <sub>e</sub>	Transmitter radiant intensity, logic high	$V_{IH}(\text{TXD}) = 4.25\text{ V}$ $I_I(\text{LED}) = 450\text{ mA}$ , $\phi^{1/2} \leq 15^\circ$ , $T_A = 25^\circ\text{C}$	100	177		mW/sr
		$V_{IH}(\text{TXD}) = 4.25\text{ V}$ $I_I(\text{LED}) = 450\text{ mA}$ , $\phi^{1/2} \leq 15^\circ$ , $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$	80	177		mW/sr
$\lambda_p$	Transmitter peak-emission wavelength		875			nm
$\Delta\lambda^{1/2}$	Transmitter spectral-line half-width		35			nm
$2\phi^{1/2}$	Transmitter viewing angle		$\pm 15$		$\pm 30$	$^\circ$
	Receiver peak-emission sensitivity wave length		880			nm

# TSLM1100

## IrDA COMPLIANT TRANSCEIVER


SOES034A – SEPTEMBER 1997 – REVISED OCTOBER 1997

### switching characteristics

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_e(PW)$	Transmitter radiant intensity pulse width	$I_e(PW)(TXD) = 1.6\ \mu s$ at 115.2k pulses/s	1.5	1.6	1.8	$\mu s$
		$I_e(PW)(TXD) = 125\ ns$ at 2M pulses/s	115	125	135	ns
$I_e$	Transmitter radiant intensity	$I_e(PW)(TXD) = 125\ ns$ at 2M pulses/s			40	ns
PW	Pulse width	RXD-A	$\Phi 1/2 \leq 15^\circ$		1	$\mu s$
		RXD-B			75	ns
PW	Pulse width, RXD-B (ASK)	500 kHz, 50% duty cycle carrier ASK	0.7	1	1.3	$\mu s$
$t_L$	Receiver latency time	RXD-A			0.5	ms
		RXD-B				

### APPLICATION INFORMATION

#### schematic

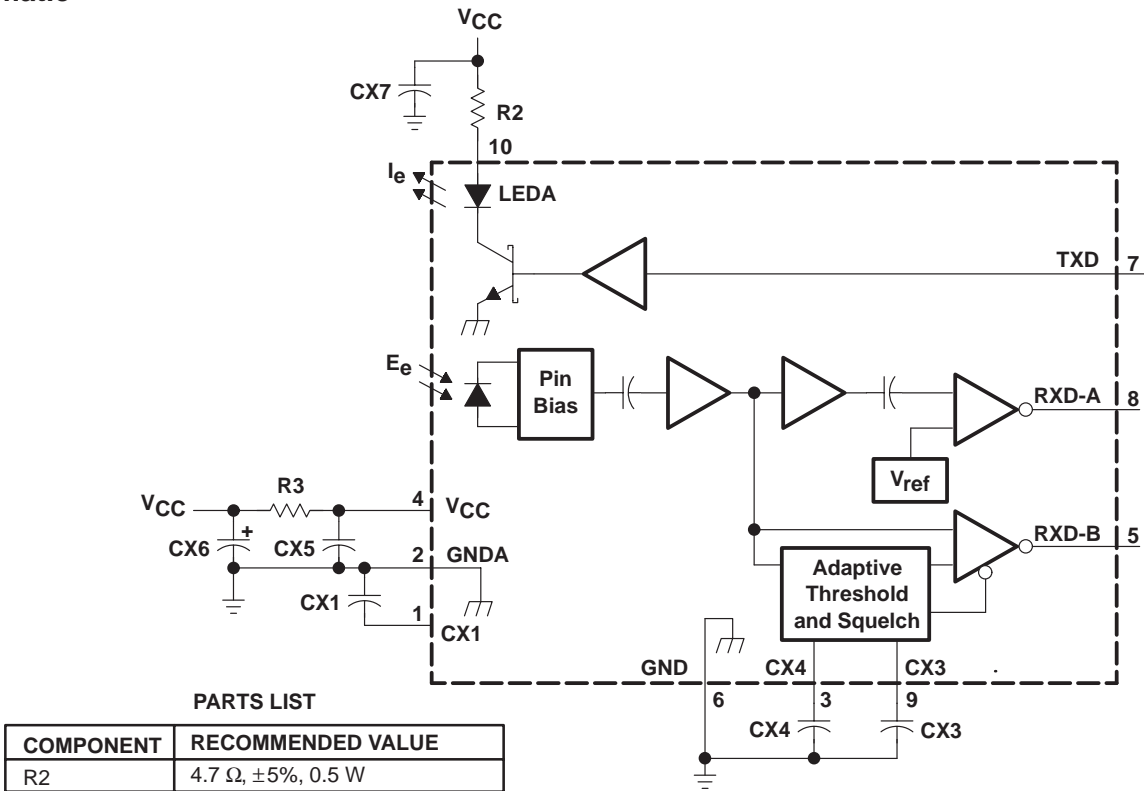


† CX1 and CX5 must be placed within 0.7 cm of the TSLM1100 to obtain optimum noise immunity.

MECHANICAL DATA

SRA (R-PSIP-T8)

PLASTIC SMALL-OUTLINE PACKAGE

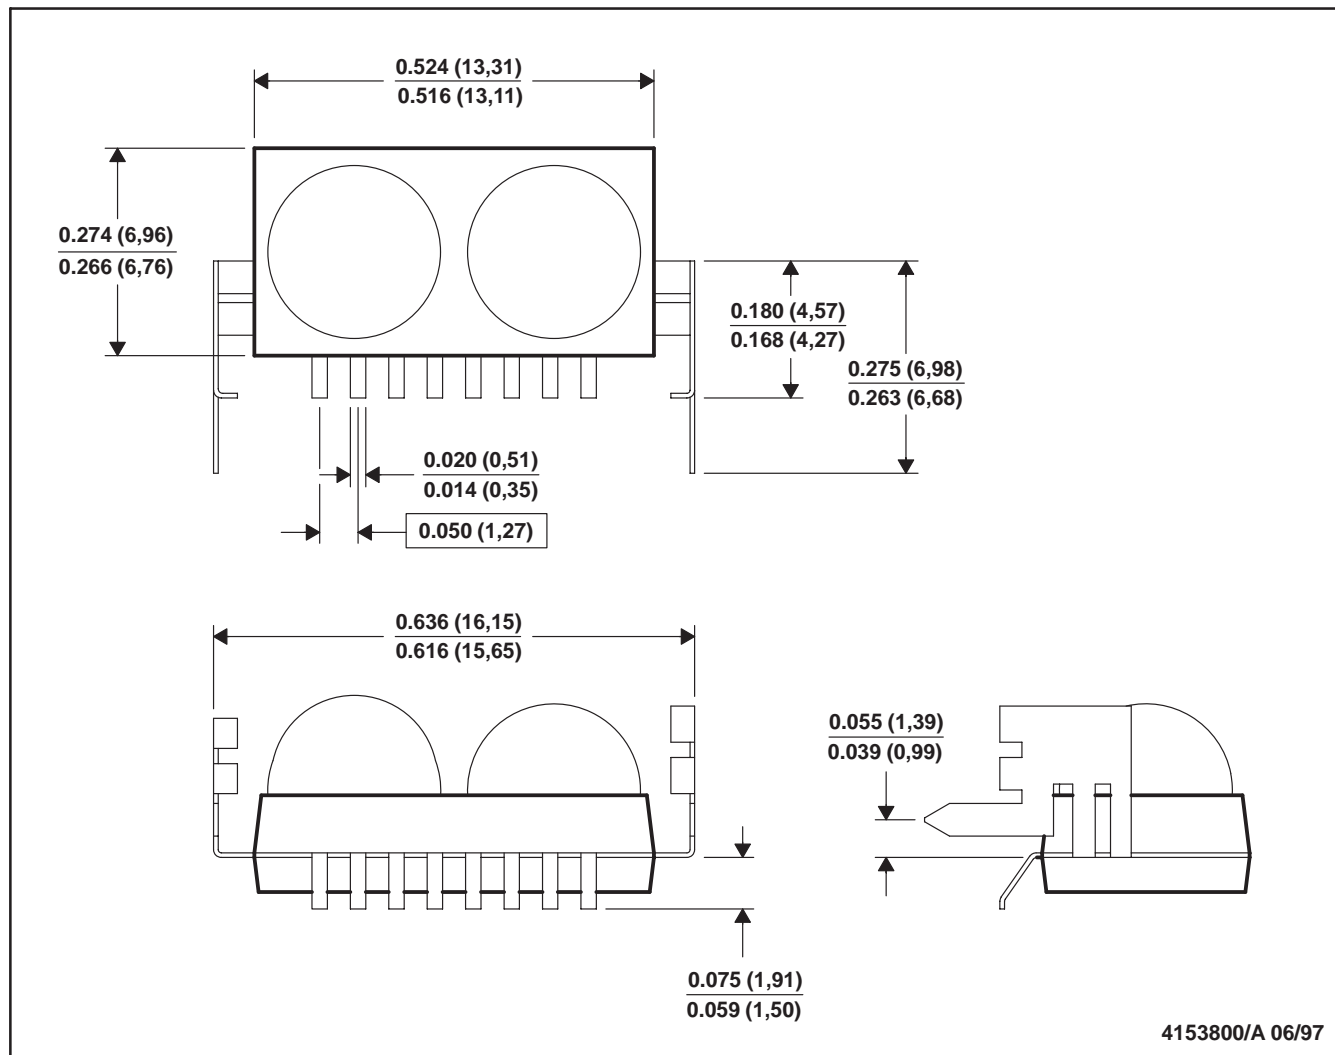

NOTES: A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.