


TERMINATIONS



2 watts, N-Type, BNC, TNC, SMA, DC - 18.0 GHz: [401, 402, 464 Series](#)

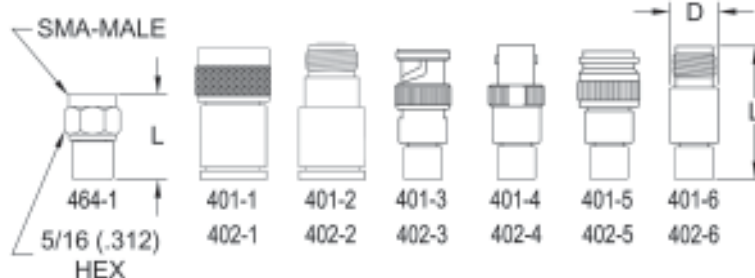

Connector	Average Power (W)	Peak Power (kW)	Catalog Number	Frequency (GHz)	VSWR (Max)	Length (L) (Inches)	Diameter (D) (Inches)	Weight (Grams)
N-Male	2	1	401-1F3	DC - 3.0	1.10:1	1.50	0.82	63
N-Male	2	1	401-1	DC - 6.0	1.20:1	1.50	0.82	63
			402-1	DC - 6.0 6.0 - 12.4 12.4 - 18.0	1.15:1 1.20:1 1.35:1	1.50	0.82	63
N-Female	2	1	401-2	DC - 6.0	1.20:1	1.60	0.75	61
			402-2	DC - 6.0 6.0 - 12.4 12.4 - 18.0	1.15:1 1.20:1 1.35:1	1.60	0.75	61
BNC-Male	2	1	401-3	DC - 6.0	1.30:1	1.35	0.60	19
			402-3	DC - 6.0 6.0 - 12.4	1.25:1 1.35:1	1.35	0.60	19
BNC-Female	2	1	401-4	DC - 6.0	1.30:1	1.40	0.60	19
			402-4	DC - 6.0 6.0 - 12.4	1.25:1 1.35:1	1.40	0.60	19
TNC-Male	2	1	401-5	DC - 6.0	1.25:1	1.35	0.65	26
			402-5	DC - 6.0 6.0 - 12.4 12.4 - 18.0	1.15:1 1.25:1 1.50:1	1.35	0.65	26
TNC-Female	2	1	401-6	DC - 6.0	1.25:1	1.40	0.60	20
			402-6	DC - 6.0 6.0 - 12.4 12.4 - 18.0	1.15:1 1.25:1 1.50:1	1.40	0.60	20
SMA-Male	2	1	464-1	DC - 18.0	1.15:1	0.50	0.32	3

MECHANICAL SPECIFICATIONS

401, 402 Series: Furnished with nickel-plated brass connectors, gold-plated female contact pins, gold-plated brass male contact pins and nickel-plated brass housing.

464-1: Furnished with stainless steel passivated connector, gold-plated brass male contact pin, black anodized heat sink and aluminum housing.

Notes:

- 1.) 50 ohms nominal impedance is standard.
- 2.) All models are furnished with virgin electrical grade PTFE insulation within the connector.

Customized solutions at off-the-shelf prices!

Custom configurations with special power ratings, frequency ranges to 18 GHz, package sizes, impedance values and connector styles or plating are also readily available in quantity. **If you don't see what you want, contact us.**



This item is guaranteed in stock and ready to ship at our [on-line store www.e-meca.com](http://www.e-meca.com)

MECA Electronics, Inc. 459 East Main Street Denville, New Jersey 07834-2595
Toll Free: (866) 444 - MECA • Phone: (973) 625 - 0661 • Fax: (973) 625 - 1258 • www.e-meca.com