

Connectorized Splitter/Combiner 8-Way



Features


- 1.8 - 2.2 MHz
- High Power Handling
- Low Insertion Loss
- Easy Mounting
- Cost Effective Networks
- SMA Connectors

Electrical Specifications

Frequency GHz	Isolation Between Ports dB Min	Insert. Loss dB Max
1.8 - 2.2	25	0.50
VSWR Max : 1	Amp. Bal. dB Max	Termination Power Rating Watts Avg.
1.20	±0.60	15

Specifications Subject to Change Without Notice

Outline Drawing

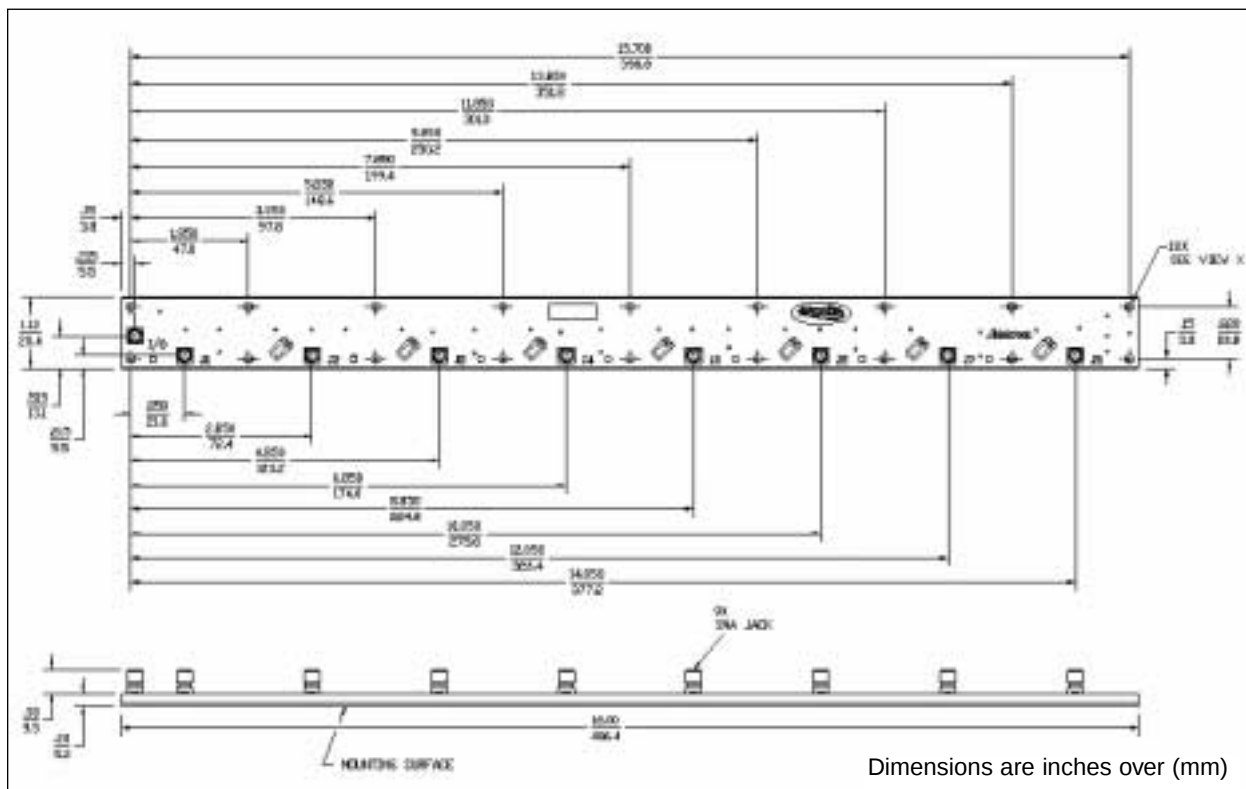

Model 4ASSA0806

Anaren



Typical Performance

