

ASSP for Mobile Telephone

VCO (800 to 2500 MHz)

VC-26 Series


■ DESCRIPTION

With excellent C/N characteristics and low current consumption, this VCO series is suitable for use with AMPS, CD-MA and PCS and is ideal to miniaturize, dual-band mode products. The VC-26 series can be used in any frequency band in the 800 MHz to 2500 MHz range. The device utilizes FUJITSU MEDIA DEVICE's high-frequency design technology, high-density mounting technology, and frequency adjustment technology to provide a high level of reliability in addition to high performance and small size.

■ FEATURES


- Superior noise characteristics (C/N, S/N)
- Frequency switching type with an internal switching transistor
- High level of stability in response to ambient temperature and load variations
- FUJITSU MEDIA DEVICE's proprietary fabrication process provides the uniformity of the central frequency distribution
- Small size, light-weight, slim-package : 9.3 × 7.3 × 2.0 mm (Max)
- SMD-type taping specifications suitable for automatic mounting and reflow soldering

■ PACKAGE



VC-26 Series

■ PIN ASSIGNMENT

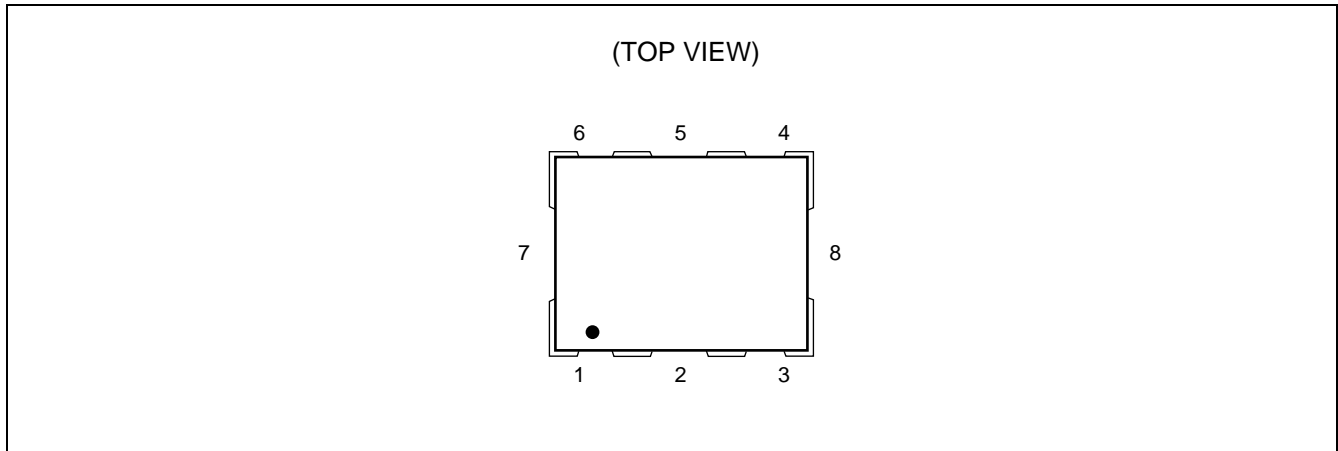

■ PIN DESCRIPTION

Pin No.	Symbol	Description
1	V _t	Control voltage
2	GND	GND
3	V _{cc}	Power supply voltage
4	OUT	Output
5	GND	GND
6	V _{sw}	Band select
7	GND	GND
8	GND	GND

■ PRODUCT LINEUP (STANDARD MODELS)

System	Center Frequency (MHz)	Band Width (MHz)	Power Supply Voltage (V)	Part Number
AMPS•CDMA/PCS	1065	± 13	2.8 ± 0.1	VC-2R8A26-1065/2143
	2143	± 30.5		

■ ELECTRICAL CHARACTERISTICS

• Absolute Maximum Ratings

Parameter	Symbol	Rating		Unit
		Min	Max	
Input DC voltage	V _{CC}	−0.6	+6.0	V
Control voltage	V _t	−0.6	+6.0	V
SW voltage	V _{SW}	−0.6	+6.0	V
Operating temperature	T _a	−30	+85	°C
Storage temperature	T _{stg}	−30	+85	°C
Storage humidity	H _{stg}	5	95	%

WARNING: VCO can be permanently damaged by application of stress (voltage, temperature, humidity, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

• Band Selection Mode

Band Width	Selection Mode	V _{SW} (V)		Center Frequency (MHz)	Current Consumption (μA)Typ
		Min	Max		
CDMA	Band1	2.65	2.8	1065	−45.0
PCS	Band2	0.0	0.15	2143	0.0

VC-26 Series

• Electrical Characteristics

Band1

(Ta = -30°C to +85°C)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Current consumption	I _{cc}	V _{CC} = 2.8 V, V _t = 1.425 V	—	—	15.0	mA
SW current	I _{sw}	V _{CC} = 2.8 V, V _t = 1.425 V, V _{sw} = 0 V	—	45.0	100.0	μA
Frequency	f _{min}	V _{CC} = 2.8 V, V _t = 0.5 V	—	—	1052.0	MHz
Frequency	f _{max}	V _{CC} = 2.8 V, V _t = 2.35 V	1078.0	—	—	MHz
Control voltage sensitivity	S _{vt}	(f _{max} - f _{min}) / 1.85	20.0	—	30.0	MHz/V
Oscillator output	P _o	V _{CC} = 2.8 V, V _t = 1.425 V, Ta = 25°C	—	0.0	—	dBm
		V _{CC} = 2.8 V, V _t = 1.425 V	-4.5	—	3.0	
C/N	C/N	Offset = 60 kHz, BW = 1Hz, Ta = 25°C	—	—	-119.0	dBc/Hz
		Offset = 60 kHz, BW = 1Hz	—	—	-117.0	
		Offset = 120 kHz, BW = 1Hz	—	—	-123.0	
		Offset = 330 kHz, BW = 1Hz	—	—	-131.0	
		Offset = 660 kHz, BW = 1Hz	—	—	-137.0	
		Offset = 900 kHz, BW = 1Hz	—	—	-140.0	
		Offset = 1700 kHz, BW = 1Hz	—	—	-141.0	
		Offset ≥ 45 kHz, BW = 1Hz	—	—	-160.0	
Higher harmonics	H _s	V _{CC} = 2.8 V, V _t = 1.425 V, Up to 3rd	—	—	-10.0	dBc
Spurious	Sp	V _{CC} = 2.8 V, V _t = 1.425 V	—	—	-80.0	dBc
Power supply variation	Push	V _{CC} = 2.8 V ± 0.1 V, V _t = 1.425 V	—	—	±1000	kHz
Load variation	Pull	V _{CC} = 2.8 V, V _t = 1.425 V, VSWR = 2, All phase	—	—	±700	kHz
Temperature drift	T _d	Ta = +25 (+60/-55)°C	—	—	±3000	kHz

VC-26 Series


Band2

(Ta= -30°C to +85°C)


Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Current consumption	I _{cc}	V _{cc} = 2.8 V, V _t = 1.425 V	—	—	15.0	mA
Frequency	f _{min}	V _{cc} = 2.8 V, V _t = 0.5 V	—	—	2113.0	MHz
Frequency	f _{max}	V _{cc} = 2.8 V, V _t = 2.35 V	2174.0	—	—	MHz
Control voltage sensitivity	S _{vt}	(f _{max} –f _{min}) / 1.85	40.0	—	60.0	MHz/V
Oscillator output	P _o	V _{cc} = 2.8 V, V _t = 1.425 V, Ta = 25°C	—	0.0	—	dBm
		V _{cc} = 2.8 V, V _t = 1.425 V	–4.5	—	3.0	
C/N	C/N	Offset = 120 kHz, BW = 1Hz	—	—	–117.0	dBc/Hz
		Offset = 1250 kHz, BW = 1Hz, Ta = + 25°C	—	—	–139.0	
		Offset = 1250 kHz, BW = 1Hz	—	—	–137.0	
		Offset = 2050 kHz, BW = 1Hz	—	—	–140.0	
		Offset ≥ 80 MHz, BW = 1Hz	—	—	–160.0	
Higher harmonics	H _s	V _{cc} = 2.8 V, V _t = 1.425 V, Up to 3rd	—	—	–10.0	dBc
Spurious	Sp	V _{cc} = 2.8 V, V _t = 1.425 V	—	—	–80.0	dBc
Power supply variation	Push	V _{cc} = 2.8 V ± 0.1 V	—	—	±1000	kHz
Load variation	Pull	V _{cc} = 2.8 V, V _t = 1.425 V, VSWR = 2, All phase	—	—	±700	kHz
Temperature drift	T _d	Ta = +25 (+60/–55)°C	—	—	±6000	kHz

VC-26 Series


■ MARKING

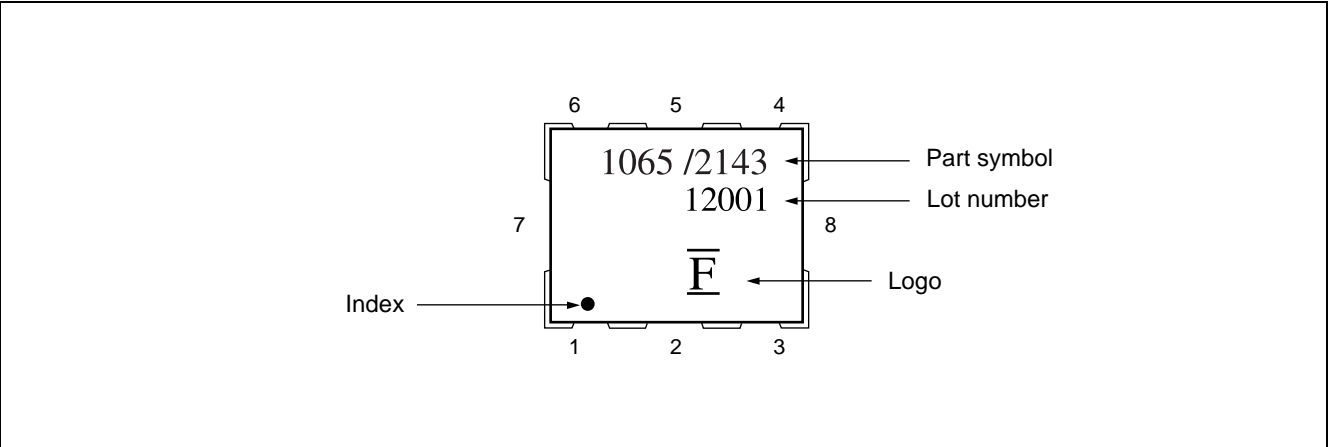

■ PART NUMBER DESIGNATION

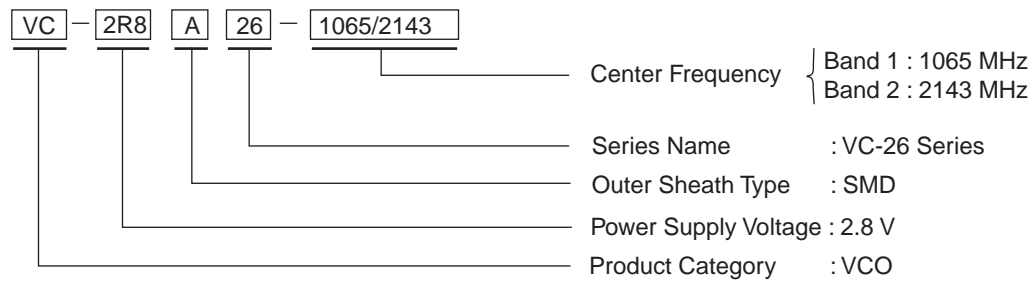


■ PACKAGE DIMENSION

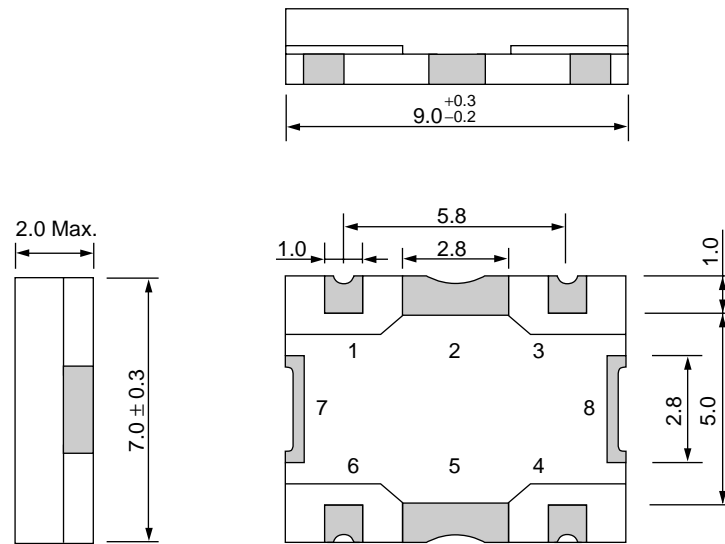

Dimensions in mm

■ RECOMMENDED PATTERN FOR SOLDERING

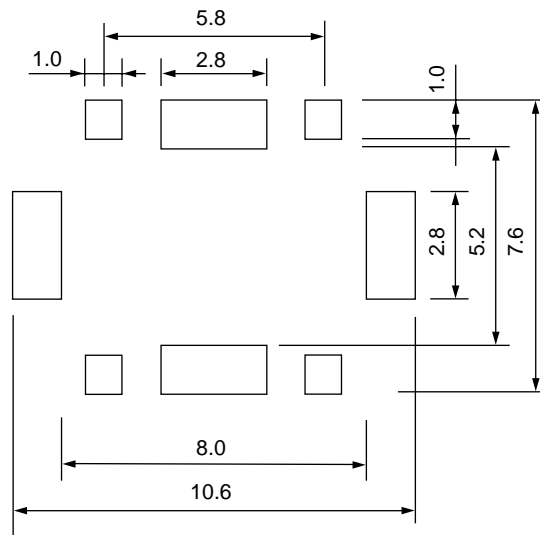


Dimensions in mm
Dimension tolerance : ± 0.1 mm

VC-26 Series


■ TAPING AND PACKAGING

(1) Carrier Tape and Packaging

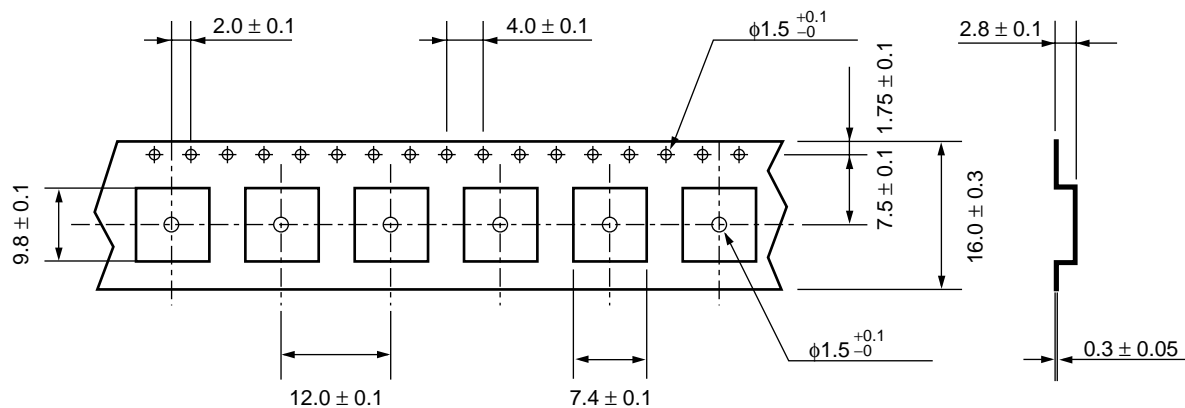


Dimensions in mm

(2) Taping Layout

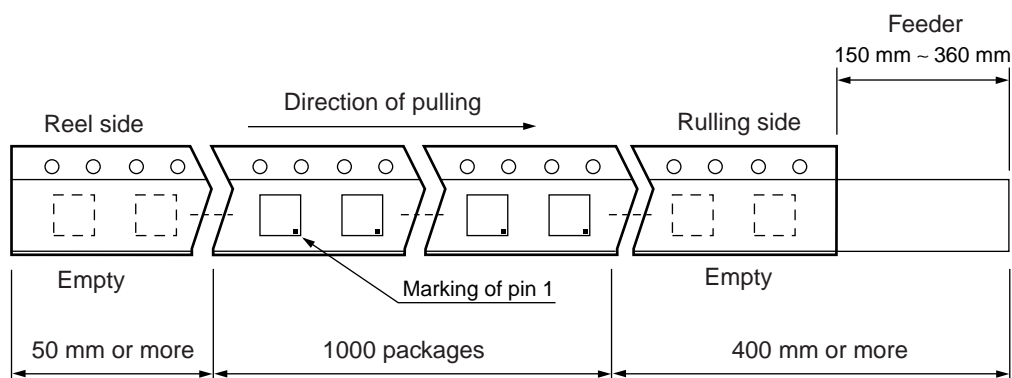

(3) Reel Shape and Dimensions

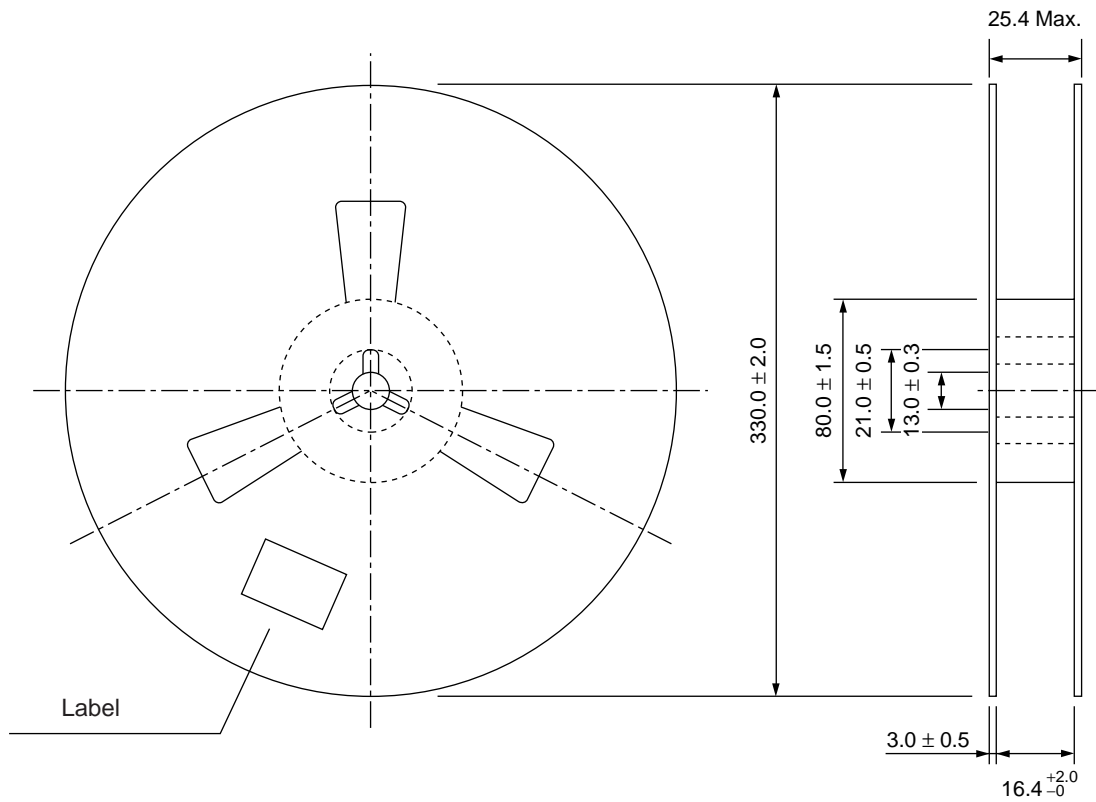

Note : The label specifies the part number, quantity, and lot number.

Volume : 1000 pcs/reel


Type : (L) 340 × (W) 340 × (t) 30 (mm)

Dimensions in mm

VC-26 Series

■ REFLOW MOUNTING CONDITIONS (RECOMMENDED)

- Perform mounting using the temperature profile shown below. To prevent thermal stress to the VCO, ensure gentle temperature gradients and use preheating whenever possible. (Recommended preheating: 140°C to 160°C for 60 s \pm 20 s)
- Always consult FUJITSU MEDIA DEVICE beforehand if mounting more than once.
- Never remove a VCO that has already been mounted and attempt to reuse.
- For mounting, use a general-purpose flux suitable for mounting electronic components.

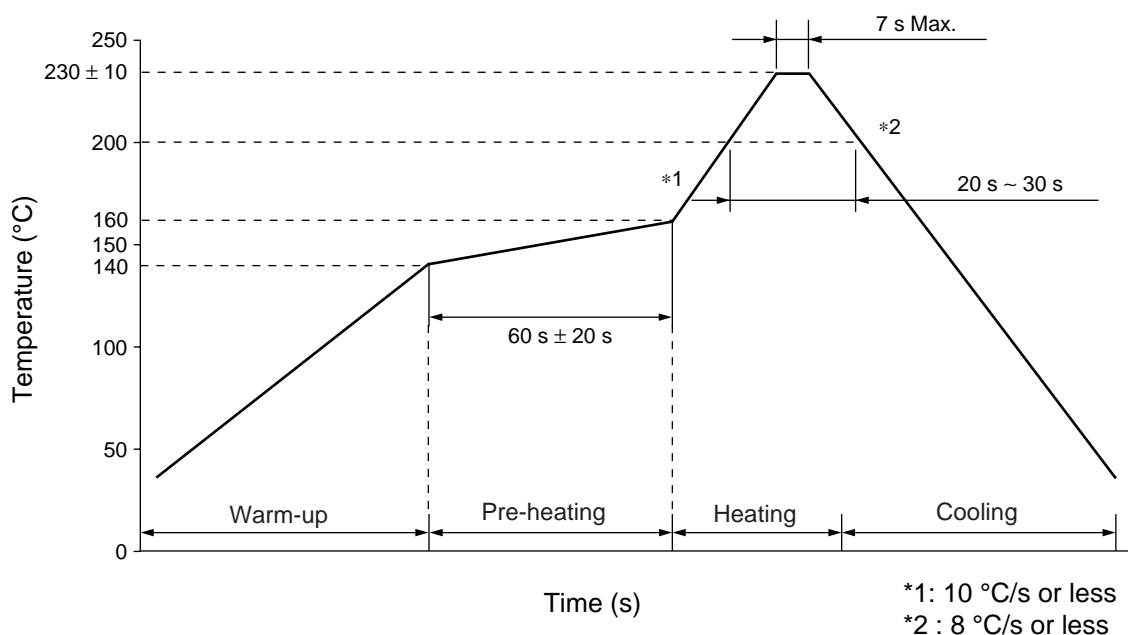

■ WASHING CONDITIONS

- Washing solution: Use isopropyl alcohol.
- Washing procedure: Immersion or steam cleaning is recommended.
- Washing time: For immersion: Less than 5 minutes at 40°C or less.
For steam: Less than 2 minutes at 90°C or less is recommended.

MEMO

FUJITSU MEDIA DEVICES LIMITED

For further information please contact:

Japan

FUJITSU MEDIA DEVICE LIMITED
International Sales & Marketing DEPT.
Shin-Yokohama Square Bldg., 14F,
Shin-yokohama 2-3-12,
Kohoku-ku, Yokohama,
Kanagawa 222-0033, Japan
Tel: +81-45-471-0061
Fax: +81-45-471-0076

<http://edevic.fujitsu.com/fmd/>

North and South America

FUJITSU MEDIA DEVICES OF AMERICA, INC.
1731 Technology Drive, Suite 800,
San Jose, CA 95110 U.S.A.
Tel: (1)-408-437-8900
Fax: (1)-408-437-0700

<http://www.fujitsumedia.com/>

Europe

FUJITSU MICROELECTRONICS EUROPE GmbH
Am Siebenstein 6-10,
D-63303 Dreieich-Buchschlag,
Germany
Tel: +49-6103-690-0
Fax: +49-6103-690-122

<http://www.fme.fujitsu.com/>

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LTD.
#05-08, 151 Lorong Chuan,
New Tech Park,
Singapore 556741
Tel: +65-281-0770
Fax: +65-281-0220

<http://www.fmal.fujitsu.com/>

F0202

© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU MEDIA DEVICES sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU MEDIA DEVICES is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

The products described in this document are designed, and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any electronic devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.



* D S 0 4 - 2 1 7 1 4 - 2 E *