


## 4777 EGSM DUPLEXER

### Features:

- ❖ Temperature Stability better than Aluminum
- ❖ Low Loss (1.0 dB, Typical)
- ❖ Lightweight, Injection Molded Housing
- ❖ 50 watts CW Power Handling
- ❖ Available from Stock
- ❖ Low Cost

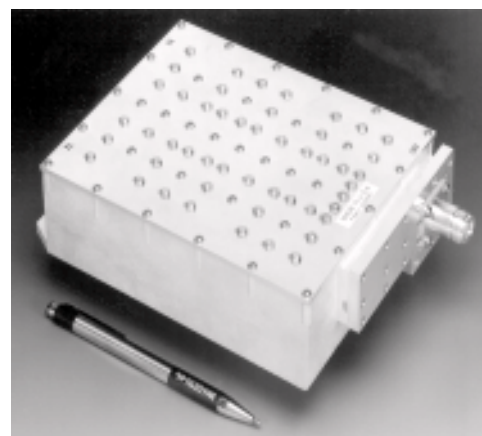

### Product Description:


The 4777 is designed to provide high isolation in EGSM applications. This duplexer uses our patented injection molded plastic technology that has been fully qualified and deployed in applications worldwide for nearly a decade. It offers high isolation, provides low insertion loss, and greater temperature stability than aluminum. The lightweight, low cost features of this product makes it ideal for applications such as micro basestations, tower mounted amplifiers, repeaters, and smart/adaptive antennas. These duplexers are immediately available from stock. Custom designs are also available upon request with a minimal lead-time.

**TABLE OF SPECIFICATIONS**


PARAMETER	FREQUENCY (MHz)	SPECIFICATIONS (GUARANTEED / TYPICAL)
<b>Receive Band:</b>		
Passband	880 - 915 MHz	
Insertion Loss	880 - 915 MHz	1.4 dB max. / 1.0 dB
Insertion Loss Ripple	880 - 915 MHz	<0.8 dB / 0.5 dB
Input / Output VSWR	880 - 915 MHz	1.4:1 max. / 1.20:1
<b>Transmit Band:</b>		
Passband	925 - 960 MHz	
Insertion Loss	925 - 960 MHz	1.4 dB max. / 1.0 dB
Insertion Loss Ripple	925 - 960 MHz	<0.8 dB / 0.5 dB
Input / Output VSWR	925 - 960 MHz	1.4:1 max. / 1.20:1
<b>Interchannel Isolation:</b>		
Tx to Rx	880 - 915 MHz	65 dB min. / 75 dB
Rx to Tx	925 - 960 MHz	68 dB min. / 75 dB
<b>Weight</b>		
		29 oz. / 820 grams
<b>Power Handling (CW)</b>		
		50 watts
<b>Operating Temperature</b>		
		-5°C to +70°C
<b>Storage Temperature</b>		
		-54°C to +85°C

## 4777 EGSM DUPLEXER


**Typical Insertion Loss and VSWR**

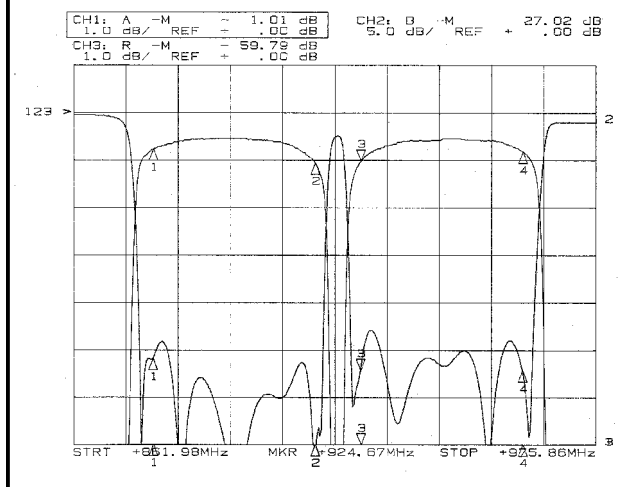

**Typical Rx to Tx and Tx to Rx Rejection**

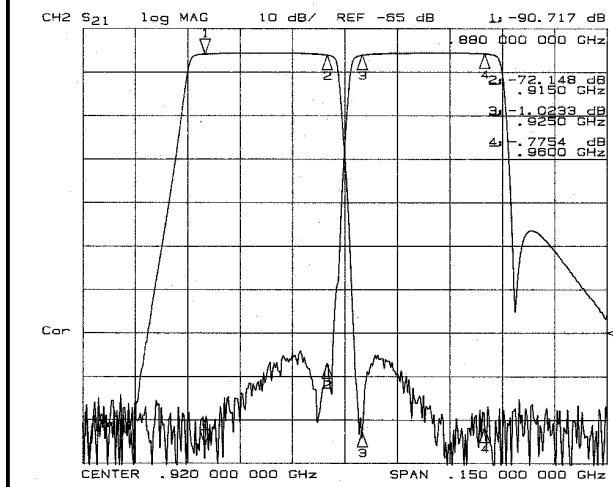

**Outline Drawing**

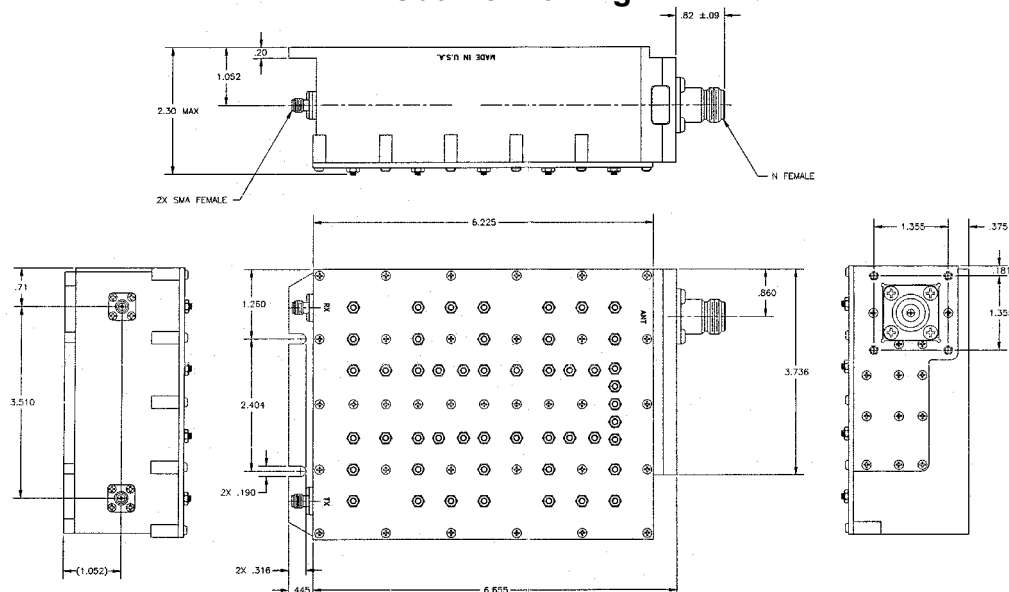

Teledyne reserves the right to make changes without further notice to any specifications herein. "Typical" parameters can and do vary in different applications.