

International IR Rectifier

SCHOTTKY RECTIFIER

40L40CW
40L45CW
2 x 20 Amps**Major Ratings and Characteristics**

Characteristics	40L..CW	Units
$I_{F(AV)}$ Rectangular waveform	40	A
V_{RRM}	40 - 45	V
I_{FSM} @ $t_p = 5 \mu s$ sine	1240	A
V_F @ $20 A_{pk}, T_J = 125^\circ C$ (per leg, Typical)	0.42	V
T_J	-55 to 150	°C

Description/ Features

The 40L..CW center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to $150^\circ C$ junction temperature. Typical applications are in switching power supplies.


- $150^\circ C T_J$ operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

40L..CW



TO-247AC



40L40CW, 40L45CW

Bulletin PD-20566 rev. B 07/02

International
Rectifier

Voltage Ratings

Part number	40L40CW	40L45CW
V_R Max. DC Reverse Voltage (V)	40	45
V_{RWM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	40L..CW	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current (Per Leg) * See Fig. 5 (Per Device)	20	A	50% duty cycle @ $T_J = 122^\circ\text{C}$, rectangular wave form
	40		
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	1240	A	5μs Sine or 3μs Rect. pulse
	350		10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RRM} applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	20	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 3$ Amps, $L = 4.4$ mH
I_{AR} Repetitive Avalanche Current (Per Leg)	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	40L..CW	Units	Conditions
	Typ.	Max.	
V_{FM} Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.48	0.53	V @ 20A
	0.61	0.69	V @ 40A
	0.42	0.49	V @ 20A
	0.60	0.70	V @ 40A
I_{RM} Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	-	1.5	mA $T_J = 25^\circ\text{C}$
	20	80	mA $T_J = 100^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.27	V	$T_J = T_J$ max.
r_t Forward Slope Resistance	8.72	mΩ	
C_T Max. Junction Capacitance (Per Leg)	-	1500	pF $V_R = 5V_{DC}$, (test signal range 100Khz to 1Mhz) 25°C
L_s Typical Series Inductance (Per Leg)	7.5	-	nH Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/μs	(Rated V_R)

(1) Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	40L..CW	Units	Conditions
T_J Max. Junction Temperature Range	-55 to 150	°C	
T_{stg} Max. Storage Temperature Range	-55 to 150	°C	
R_{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	1.6	°C/W	DC operation * See Fig. 4
R_{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.8	°C/W	DC operation
R_{thCS} Typical Thermal Resistance, Case to Heatsink	0.24	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	6(0.21)	g(oz.)	
T Mounting Torque	Min. 6(5)	Kg-cm (lbf-in)	Non-lubricated threads
	Max. 12(10)		
Case Style	TO-247AC(TO-3P)		JEDEC

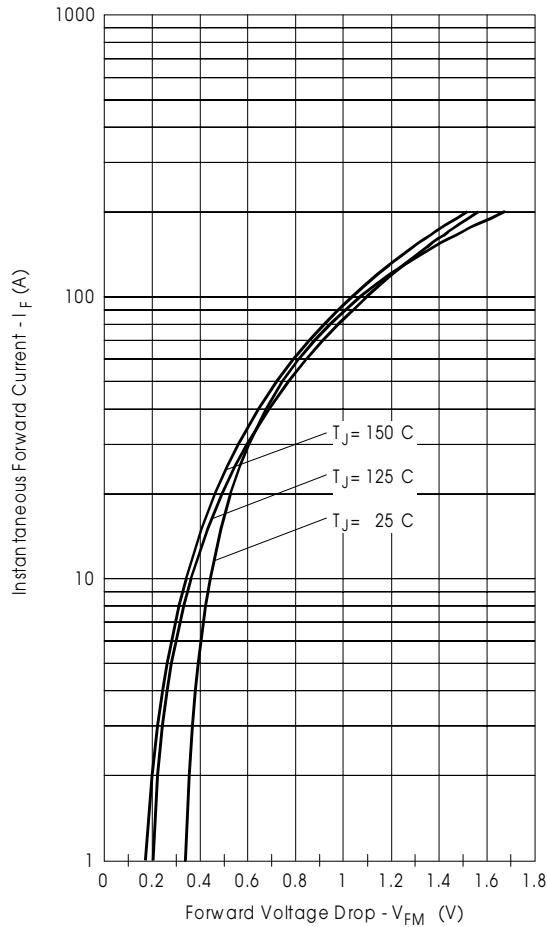


Fig. 1 - Max. Forward Voltage Drop Characteristics
 (Per Leg)

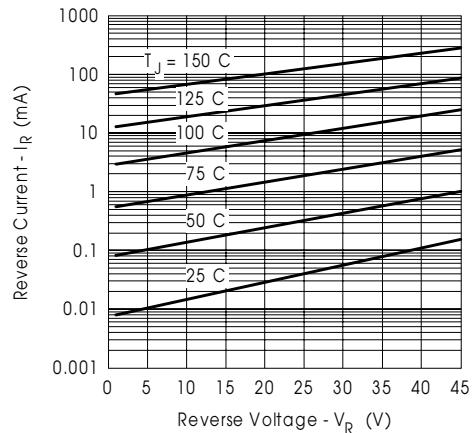


Fig. 2 - Typical Values Of Reverse Current
 Vs. Reverse Voltage (Per Leg)

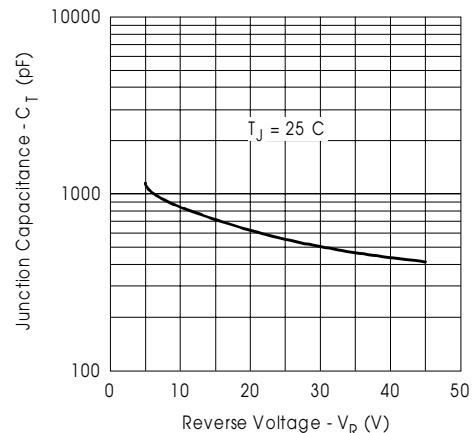


Fig. 3 - Typical Junction Capacitance
 Vs. Reverse Voltage (Per Leg)

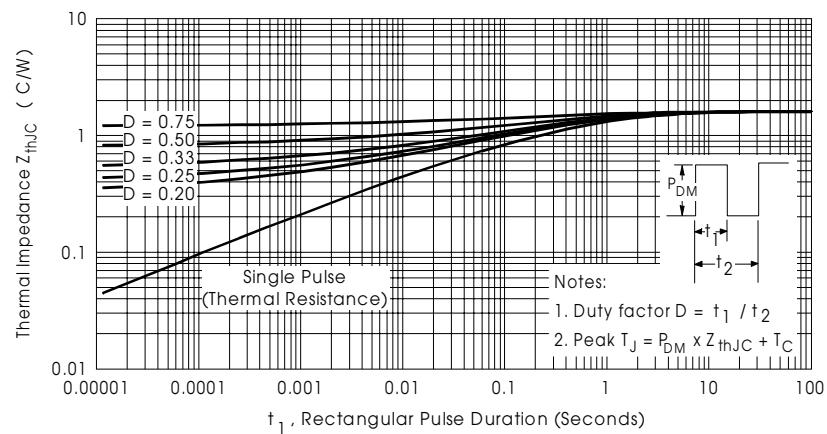


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

40L40CW, 40L45CW

Bulletin PD-20566 rev. B 07/02

International
Rectifier

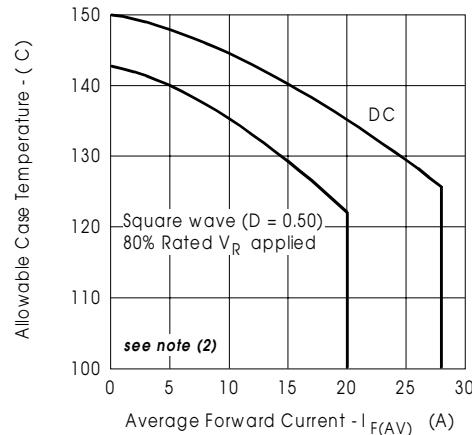


Fig. 5-Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

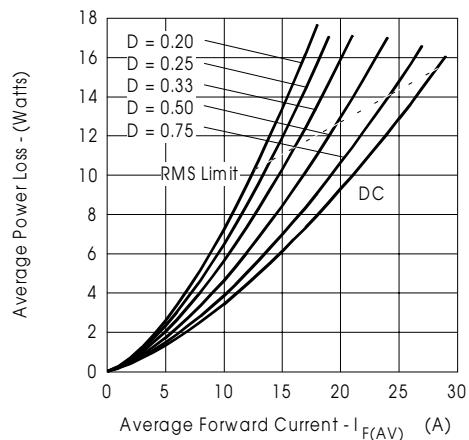


Fig. 6-Forward Power Loss Characteristics (Per Leg)

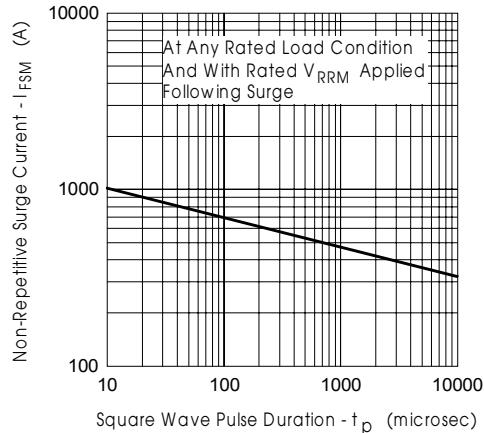


Fig. 7-Max. Non-Repetitive Surge Current (Per Leg)


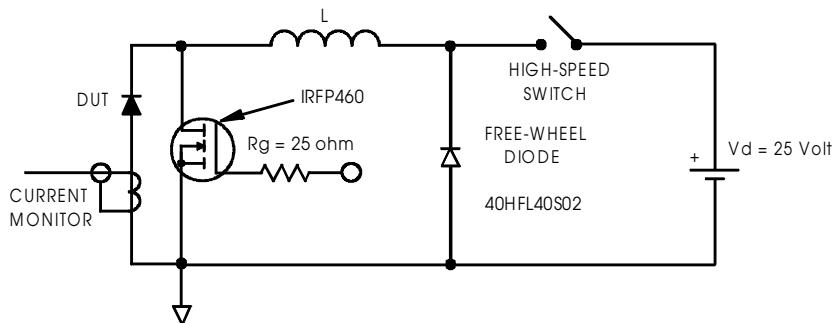


Fig. 8-Unclamped Inductive Test Circuit

- (2) Formula used: $T_c = T_j - (P_d + P_{dREV}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{dREV} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

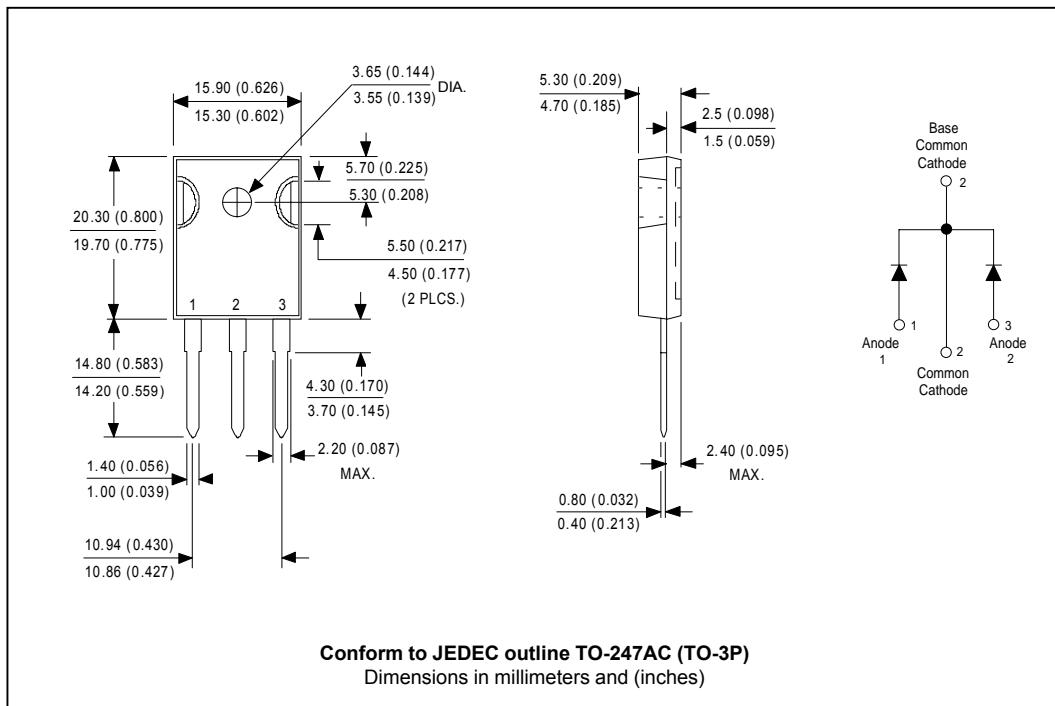

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 07/02