

SANYO**LA9605W****MD Player RF and Matrix Signal-Processing IC****Overview**

The LA9605W integrates MiniDisk playback functions, including servo error signal generation, RF signal processing, and wobble signal binarization output on a single chip. The LA9605W, when combined with an LC89640, can implement a complete MD player system.

Features

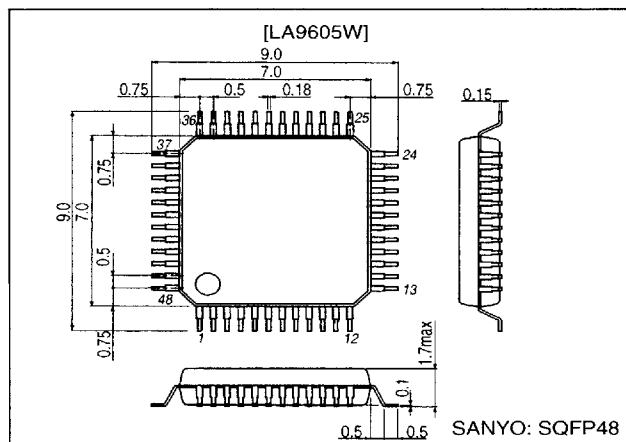
- Allows the servo error signal level to be set to an arbitrary level using a VCA circuit.
- Few peripheral components required.
- Ultraminiature package

Functions

- Servo signal I-V conversion amplifier
- Pit/groove switching RF amplifier
- RF equalizer amplifier
- Servo signal VCA
- APC circuit
- Focus error amplifier
- Tracking error amplifier
- HFL circuit
- Defect detection circuit
- ADIP amplifier
- Pre-pit circuit (pit/groove discrimination circuit)
- ADIPCR

Package Dimensions

unit: mm

3163A-SQFP48

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Business Headquarters

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

D2598RM (OT) No. 5980-1/11

= ■ 7997076 0021993 8T3 ■

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC \text{ max}}$		7	V
Allowable power dissipation	$P_d \text{ max}$	When mounted on a $114.3 \times 76.1 \times 1.6$ -mm single-sided glass-epoxy printed circuit board. $T_a \leq 75^\circ\text{C}$	350	mW
Operating temperature	T_{opr}		-25 to $+75$	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to $+150$	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		5	V
Operating supply voltage range	$V_{CC \text{ op}}$		2.7 to 5.5	V

Electrical Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 5 \text{ V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Current drain	I_{CC}		18	32	46	mA
[RF AMP GROVE]						
Gain	V_{GRFMG1}	$EQ_O/I : J = V_C$	27	30	33	dB
[RF AMP MO.PIT]						
Offset	$V_{OS \text{ RFMP1}}$	$RF_O1 : I = J = V_C$	$V_C - 245$	$V_C - 185$	$V_C - 125$	mV
Gain	V_{GRFMP1}	$EQ_O/I : I = J$	15	18	21	dB
[RF AMP AL]						
Offset	$V_{OS \text{ RFAP1}}$	$RF_O1 : I = J = V_C$	$V_C - 152$	$V_C - 92$	$V_C - 32$	mV
Gain	V_{GRFAP1}	$EQ_O/I : I = J = V_C$	5.5	8.5	11.5	dB
[RF AMP]						
Output level	H	V_{ORFH1} $EQ_O : RF_{I1} = V_C + 1 \text{ V}$	3.5	4.1		V
	L	V_{ORFL1} $EQ_O : RF_{I1} = V_C - 1 \text{ V}$		0.9	1.5	V
[ABCD GR]						
Gain	V_{GABG1}	ABCD/A (10 kHz) : $A = B = C = D$, $SGC = 0.78 \text{ V}$	17.5	20.5	23.5	dB
Output level	H	V_{OABGH2} $ABCD : A = B = C = D = V_C - 400 \text{ mV}$, $SGC = 0.78 \text{ V}$	4.5	4.9		V
	L	V_{OABGL2} $ABCD : A = B = C = D = V_C + 400 \text{ mV}$, $SGC = 0.78 \text{ V}$		0.1	0.5	V
[ABCD PIT]						
Gain	V_{GABP1}	ABCD/A (10 kHz) : $A = B = C = D$, $SGC = 0.3 \text{ V}$	10.6	13.6	16.6	dB
Frequency characteristics	$V_{\Delta GABP1}$	ABCD/A (10 kHz) – ABCD/A (35 kHz), $SGC = 0.3 \text{ V}$	3.9	6.9	9.9	dB
[FOCS]						
Output level	H	V_{OFOH1} $FE : B = D = V_C + 825 \text{ mV}$, $A = C = V_C$, $SGC = 0.3 \text{ V}$	4.5	4.9		V
	L	V_{OFOL1} $FE : B = D = V_C - 825 \text{ mV}$, $A = C = V_C$, $SGC = 0.3 \text{ V}$		0.1	0.5	V
Gain	V_{GFO1}	FE/A (5 kHz) : $A = -B = C = -D$, $SGC = 0.3 \text{ V}$	13.9	16.9	19.9	dB
Frequency characteristics	$V_{\Delta GFO1}$	FE/A (5 kHz) – FE/A (26 kHz) : $A = -B = C = -D$, $SGC = 0.3 \text{ V}$	0.4	3.4	6.4	dB
[TE GR]						
Output level	H	V_{OTEGH1} $TE : F = V_C + 200 \text{ mV}$, $E = V_C$, $SGC = 0.78 \text{ V}$	4.5	4.9		V
	L	V_{OTEGL1} $TE : F = V_C - 200 \text{ mV}$, $E = V_C$, $SGC = 0.78 \text{ V}$		0.1	0.5	V
Gain	V_{GTEG1}	TE/E (5 kHz) : $E = -F$, $SGC = 0.78 \text{ V}$	31.4	34.4	37.4	dB
Frequency characteristics	$V_{\Delta GTEG1}$	TE/E (5 kHz) – TE/E (38 kHz) : $E = -F$, $SGC = 0.78 \text{ V}$	1.8	4.8	8.8	dB
[TE PIT]						
Gain	V_{GTEP1}	TE/E (5 kHz) : $E = -F$, $SGC = 0.3 \text{ V}$	25.2	28.2	31.2	dB
Frequency characteristics	$V_{\Delta GTEP1}$	TE/E (5 kHz) – TE/E (38 kHz) : $E = -F$, $SGC = 0.3 \text{ V}$	1.8	4.8	8.8	dB
[ADIP]						
Output level	H	V_{OADH1} $CAD : A = D = V_C + 0.4 \text{ V}$, $B = C = V_C$	1.4	1.7	2.0	V
	L	V_{OADL1} $CAD : A = D = V_C - 0.4 \text{ V}$, $B = C = V_C$	3.1	3.3	3.6	V

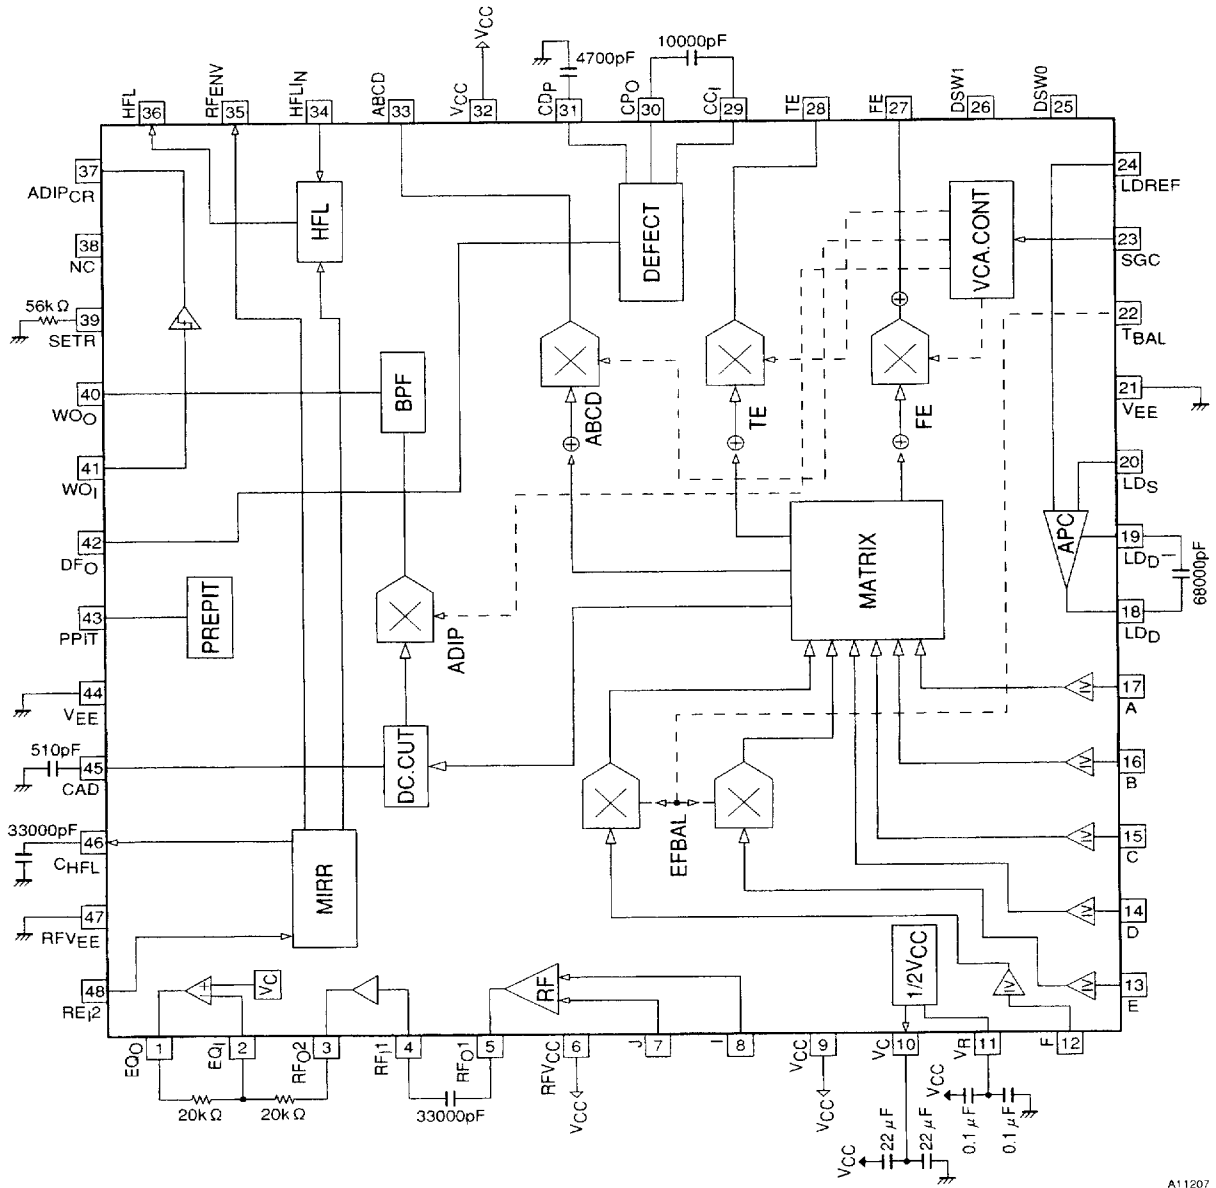
Continued on next page.

LA9605W

Continued from preceding page.

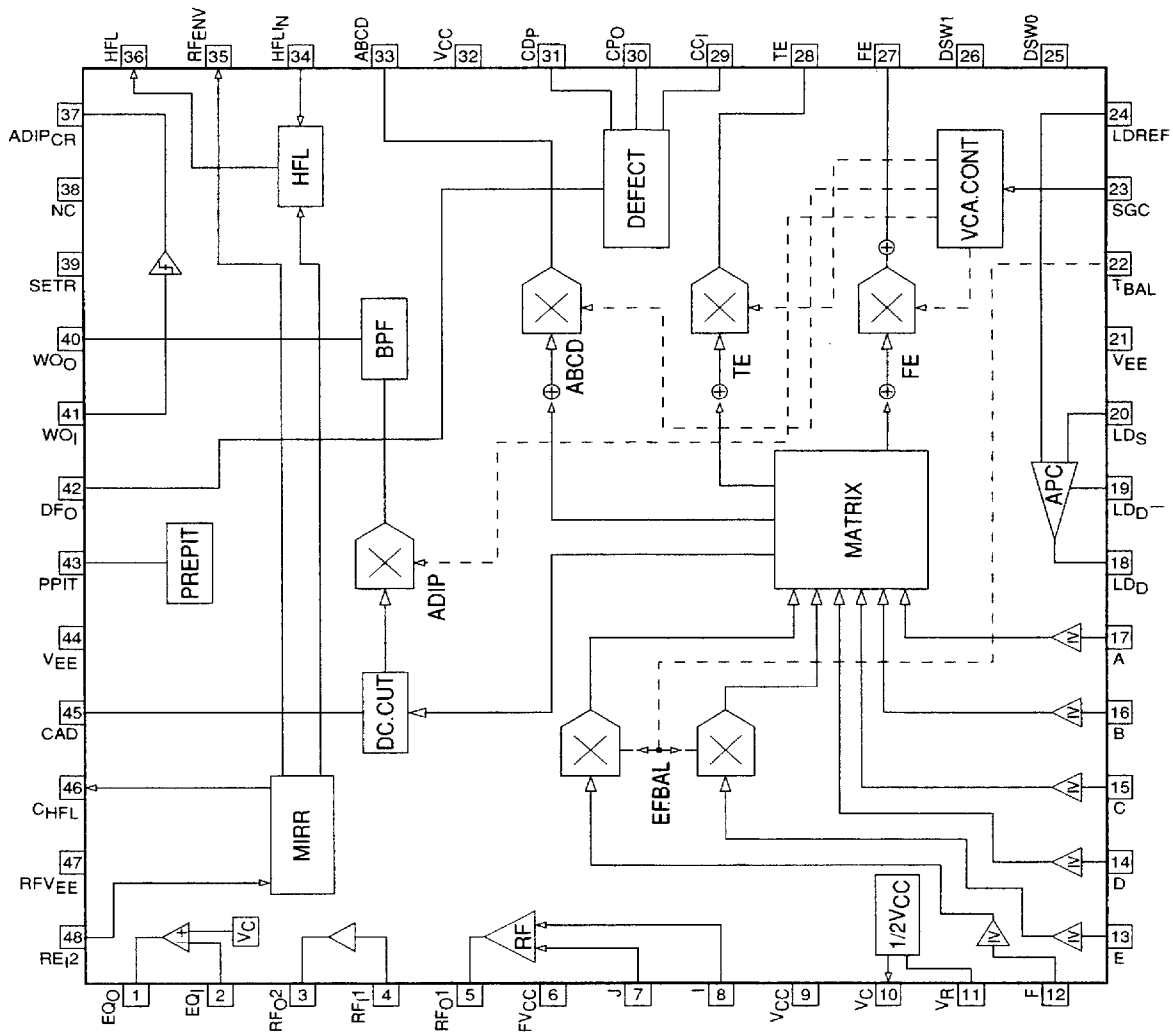
Parameter		Symbol	Conditions	Ratings			Unit
				min	typ	max	
[APC LDON]							
Output level	H	V _{OLH1}	LD _D : LD _{REF} = 0 V, LD _S = 1 V	3.7	4.2	4.7	V
	L	V _{OLL1}	LD _D : LD _{REF} = 1 V, LD _S = 0 V	0.3	0.8	1.3	V
[APC LDOFF]							
Off voltage		V _{OLOF1}	LD _D : LD _{REF} = 1 V, LD _S = 0 V	3.7	4.2	4.7	V
[HFL]							
Output level	H	V _{OHFLH1}	HFL : HFL _{IN} = V _C – 0.1 V	4.6	4.8		V
	L	V _{OHFL1}	HFL : HFL _{IN} = V _C		0.2	0.4	V
[DEFCT]							
Output level	H	V _{ODEFH1}	DFO : CC _I = 1.5 V	4.6	4.9		V
	L	V _{ODEFL1}	DFO : CC _I = OPEN, A = B = C = D = V _C – 200 mV		0.1	0.4	V
[VC reference voltage]							
		V _{OSC}	V _C :	2.35	2.5	2.65	V
		V _{OCLSO}	V _C : V _C – 1 mA	2.35	2.5	2.65	V
		V _{OCLSI}	V _C : V _C + 1 mA	2.35	2.5	2.65	V
[PREPIT MO]							
High-level output voltage		V _{OPPH1}	PPIT : I = J = 200 kHz (95 mVp-p + V _C + 0.125 V)	4.6	4.8		V
Low-level output voltage		V _{OPPL1}	PPIT : I = J = 30 kHz (95 mVp-p + V _C + 0.125 V)		0.2	0.4	V
High/low level switching time		DTPP1	PPIT : I = J = 200 kHz to 30 kHz (95 mVp-p + V _C + 0.125 V)	70	150	230	μs
[BPF]							
Gain		V _{GBF1}	WO _{O/A} (22.05 kHz) : A = –B = –C = D, SGC = 0.3 V	23.8	26.8	29.8	dB
Filter characteristics		V _{GBF2}	V _{GBF1} /V _{GBF2} : (16 kHz), SGC = 0.3 V	0.8	4.8	9.8	dB
		V _{GBF3}	V _{GBF1} /V _{GBF3} : (30 kHz), SGC = 0.3 V	0.4	4.4	9.4	dB
[I – V]							
IV voltage A		ΔV _{RA}	A : V (–1 μA) – V (–2 μA)	70	100	130	mV
IV voltage B		ΔV _{RB}	B : V (–1 μA) – V (–2 μA)	70	100	130	mV
IV voltage C		ΔV _{RC}	C : V (–1 μA) – V (–2 μA)	70	100	130	mV
IV voltage D		ΔV _{RD}	D : V (–1 μA) – V (–2 μA)	70	100	130	mV
IV voltage E		ΔV _{RE}	E : V (–1 μA) – V (–2 μA)	70	100	130	mV
IV voltage F		ΔV _{RF}	F : V (–1 μA) – V (–2 μA)	70	100	130	mV
Ta = 25°C, VCC = 2.7 V							
[FOCS]							
Offset		V _{OSFO1}	FE : A = B = C = D = OPEN, SGC = 0.78 V	–300	0	+300	mV
[COMP]							
Offset		V _{OSCO1}	WO _I : WO _I = OPEN	–15	0	+15	mV

Test Circuit





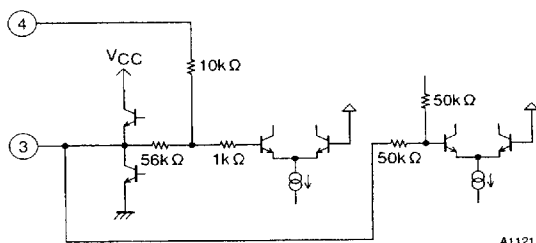
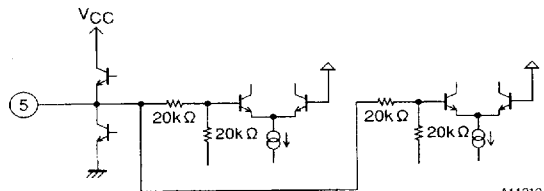
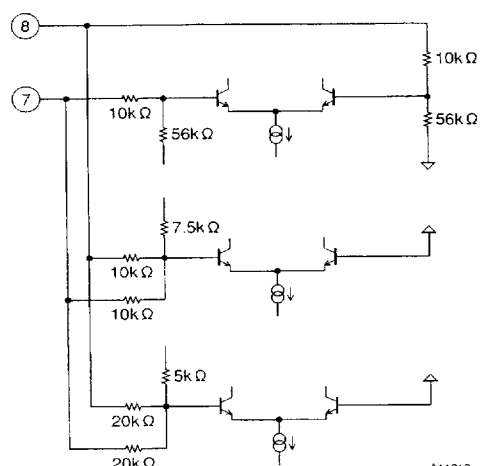
A11207

Block Diagram and Pin Assignment



A11208

Pin Functions

Pin No.	Pin	I/O	Function	Equivalent circuit
1	EQ _O	O	RF equalizer output	 A11209
2	EQ _I	I	RF equalizer input	 A11210
3	RF _{O2}	O	RF output	 A11211
4	RF _{I1}	I	RF AC coupled input	
5	RF _{O1}	O	RF AC coupled output	 A11212
6	RFV _{CC}	P	RF block power supply	
7	J	I	I/V converted RF signal input	 A11213
8	I		I/V converted RF signal input	

Continued on next page.

Continued from preceding page.

Pin No.	Pin	I/O	Function	Equivalent circuit
9	V _{CC}	P	Matrix block power supply	
10	V _C	O	1/2 V _{CC} output (reference voltage)	A11214
11	V _R	I	1/2 V _{CC} input	
12	F	I	Side beam signal inputs	A11215
13	E			
14	D		Main beam signal inputs	
15	C			
16	B			
17	A			
18	LD _D	O	APC output	A11216
19	LD _D -	I	APC phase compensation capacitor connection	
20	LD _S	I	I/V converted laser optical intensity input	A11217
24	LD _{REF}		Laser power setting input	
21	V _{EE}	P	Matrix block ground	
22	T _{BAL}	I	Tracking error signal balance adjustment voltage input	A11218
23	SGC		V _{CA} gain control voltage input (ground reference)	A11219

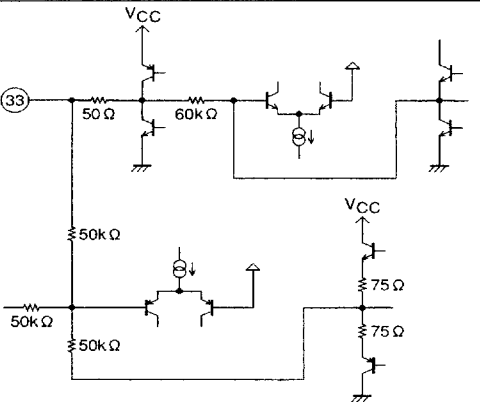
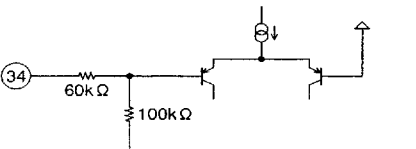
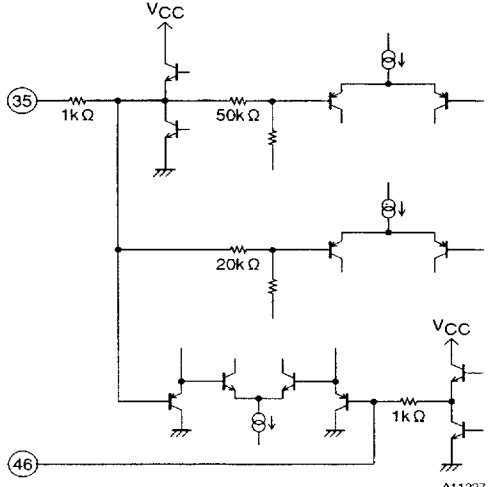
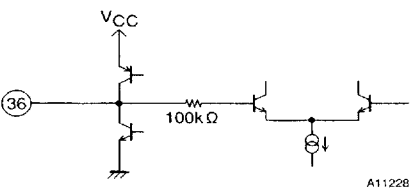
Continued on next page.

Continued from preceding page.

Pin No.	Pin	I/O	Function	Equivalent circuit
25	DSW0	I	Disc mode switching signal input, laser off input High: Low reflectance disc Low: High reflectance disc If both DSW0 and DSW1 are low, the laser is off.	
26	DSW1		Disc mode switching signal input, laser off input High: Tracking is over a pit Low: Tracking is over a groove If both DSW0 and DSW1 are low, the laser is off.	
27	FE	O	Focus error signal output	
28	TE		Tracking error signal output	
29	CC _I	I	Defect peak hold signal AC coupled input	
30	CP _O	O	Defect peak hold signal output	
31	C _{DP}	O	Defect peak hold capacitor connection	
32	V _{CC}	P	ADIP block power supply	



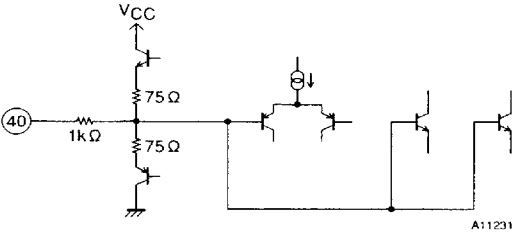
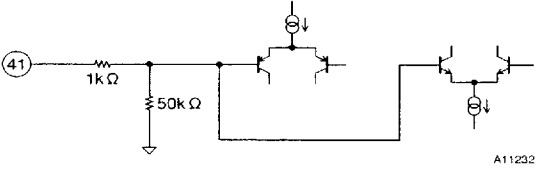


Continued on next page.

Continued from preceding page.

Pin No.	Pin	I/O	Function	Equivalent circuit
33	ABCD	O	Main beam optical intensity signal output	
34	HFL _{IN}	I	HFL detection optical intensity signal AC coupled input used in groove mode	
35	RF _{ENV}	O	RF envelope signal output	
46	CH _{FL}		Mirror peak hold capacitor connection	
36	HFL	O	HFL signal (tracking on/off signal) output	

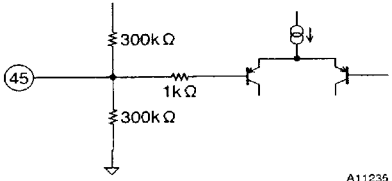
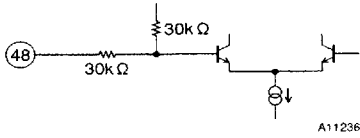
Continued on next page.

Continued from preceding page.

Pin No.	Pin	I/O	Function	Equivalent circuit
37	ADIP _{CR}	O	ADIP carrier output	 A11229
38	NC	—	No connection	
39	SETR	I	Bandpass filter to setting	 A11230
40	WO _O	O	Wobble signal output	 A11231
41	WO _I	I	Wobble signal AC coupled input	 A11232
42	DF _O	O	Defect detection signal output	 A11233
43	PPIT	O	Pit/groove	 A11234
44	V _{EE}	P	ADIP block ground	

Continued on next page.

Continued from preceding page.

Pin No.	Pin	I/O	Function	Equivalent circuit
45	CAD	—	Wobble DC cut capacitor connection	 A11235
47	RFV _{EE}	P	RF block ground	
48	RF _{I2}	I	RF signal input	 A11236

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of December, 1998. Specifications and information herein are subject to change without notice.